
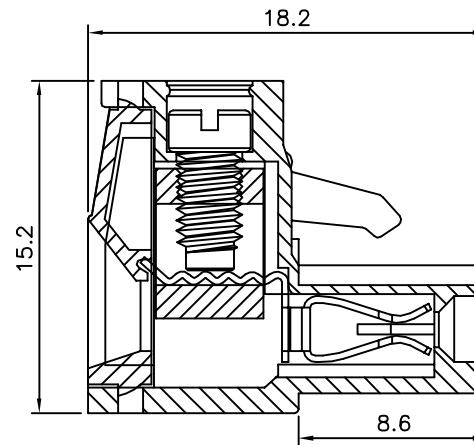
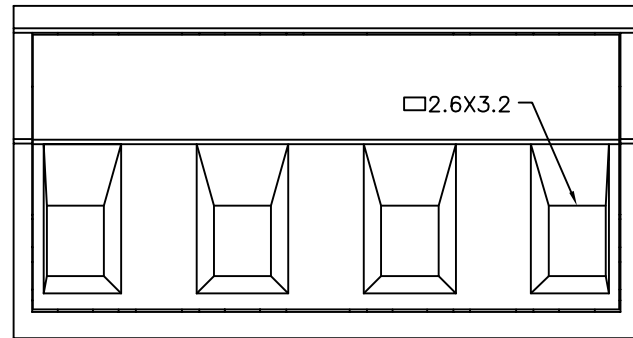


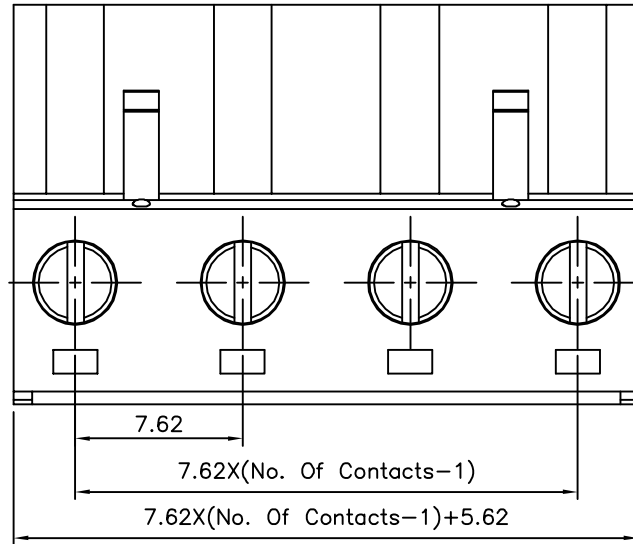

△ SPECIFICATION

Current Rating:16 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute)
 Test Time=60 Sec/1 PCS
 Wire Range:12~26 AWG
 Operating Temperature:-40°C~+105°C
 Torque:5.0 Kgf.cm/M3
 Soldering Reliability:
 Test Temperature=250°C±10°C,5s Max.
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Contact(Metal Housing):Copper Alloy,Nickel Plated
 Wire Guard:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide,UL94V-0,Green
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

13959

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.30
 .X ±0.15
 .XX ±0.05
 ANG. ±1°

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Spec.	HZF	03/12/2013
△ A0	NEW RELEASE	HZF	03/11/2010