

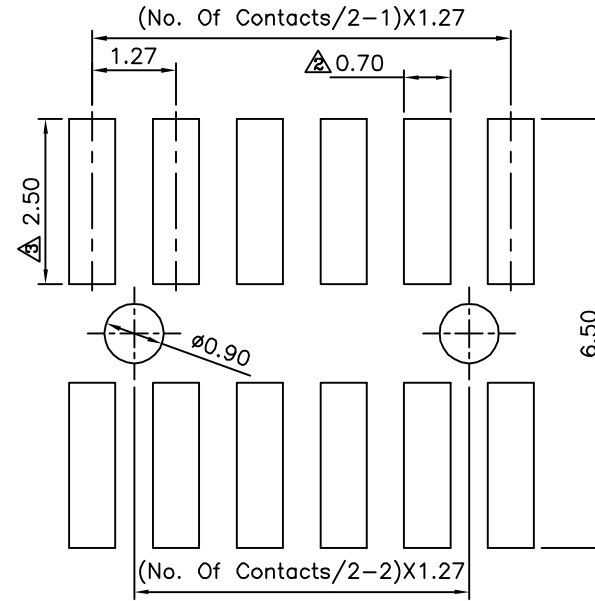
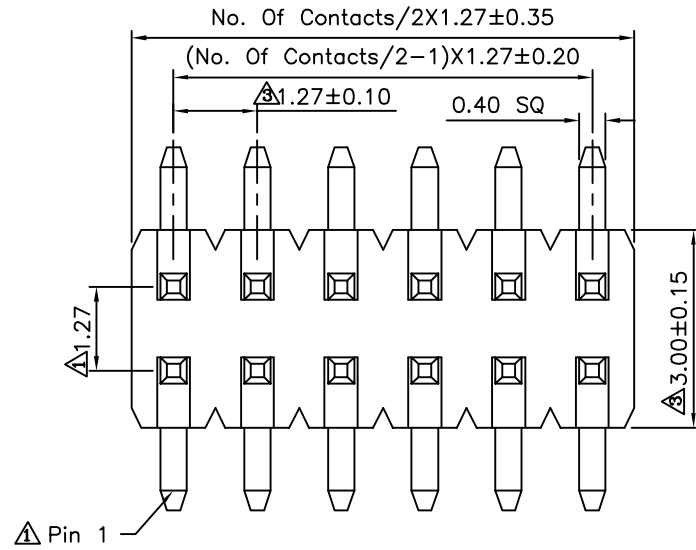


△ SPECIFICATION

- △ Current:1A
- Withstanding Voltage:1000V AC Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:5000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:06~100 Contacts
- RoHS Compliant

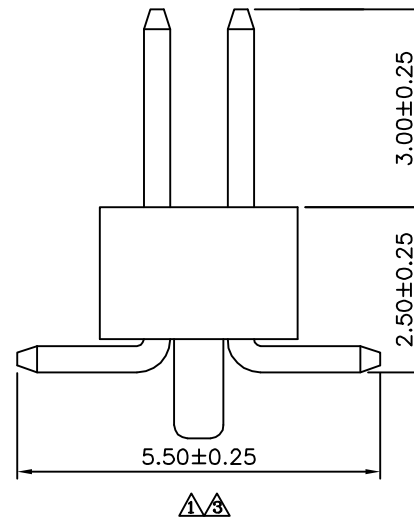

△ Recommended P.C.B. Layout

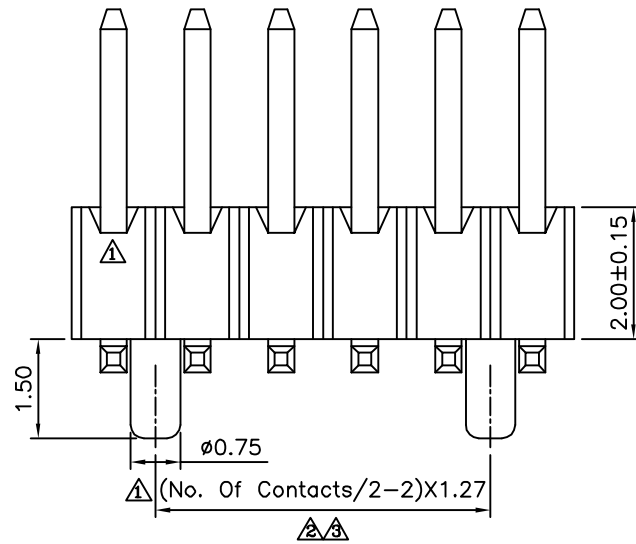

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14042

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
ANG. $\pm 5^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	11/29/2013
△ A2		Modify Data	HZF	01/03/2011
△ A1		Modify Data	HZF	07/02/2009
△ A0		NEW RELEASE	SHIN	08/14/2006