

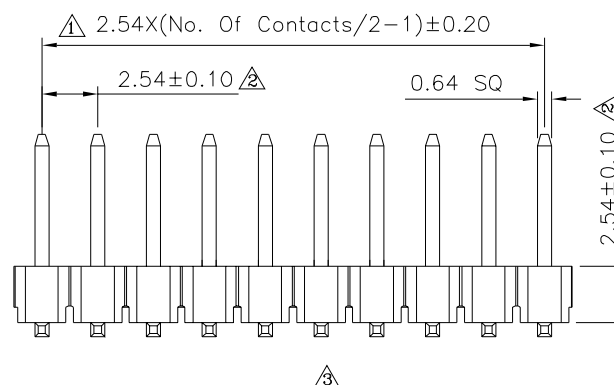
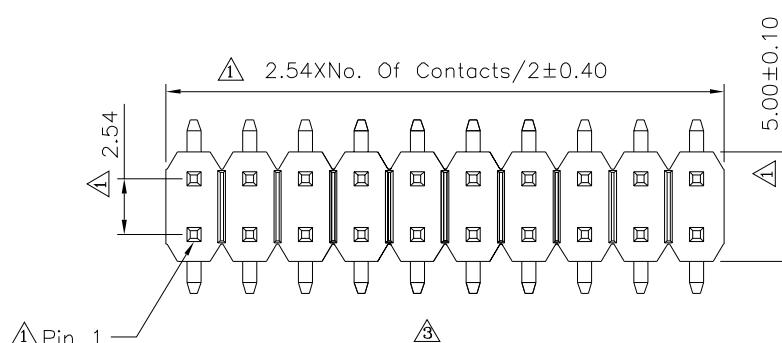


△△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

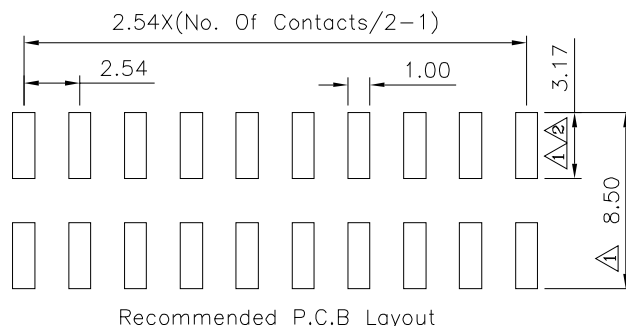

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14134

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △.X ±0.38
 △.XX ±0.25
 △.XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	12/22/2022
△2	A2	Modify Data	HZF	08/31/2011
△1	A1	Modify Data	HZF	11/25/2009
△0	A0	NEW RELEASE	SHIN	03/13/2006