

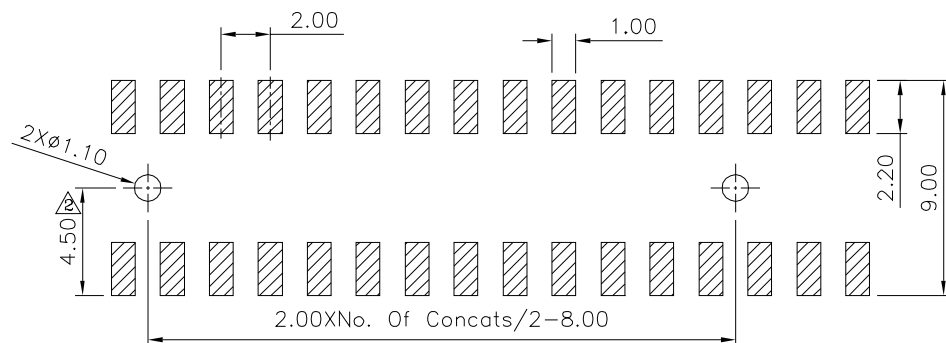
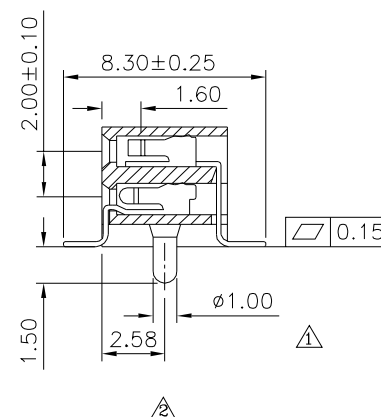


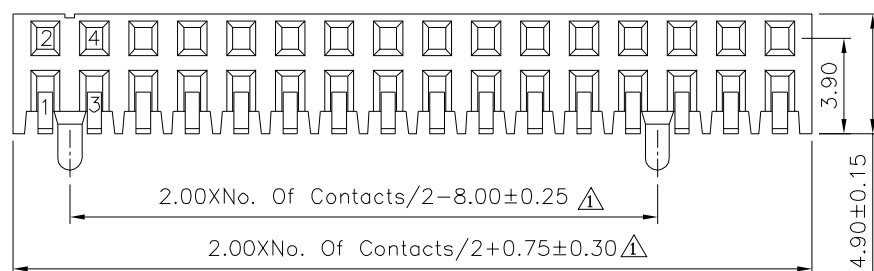

Recommended P.C.B. Layout(Top Side)
 ① (PCB Board Tolerance±0.05)

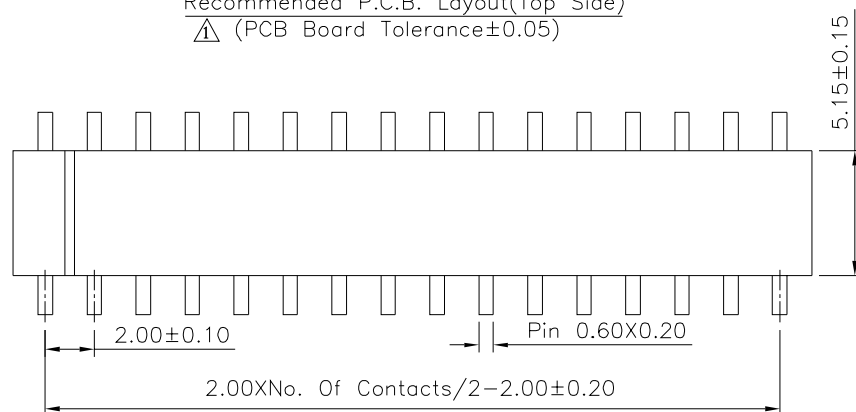

1 SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
② Contact:Phosphor Bronze,Gold Plated Over Nickel
③ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

14258

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYF

REV.	
------	--

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle 1$	.X	± 0.40
	.XX	± 0.25
	.XXX	± 0.15
	ANG.	$\pm 3^\circ$

UNIT



$\triangle$	A 7

Modific. Data:	
----------------	--

Modify	Data

Modify Data

Modify Data

NEW RELEASES

NEW RELEASES	
REVIEWS	

CE

1515

1175

Hzf

HZF

HZF

BECKY

BECKT
CHK

12 / 15 / 2017

12/15/2017	

07/17/2012

01/14/2010

11/04/2005

11/04/2003
DATE