


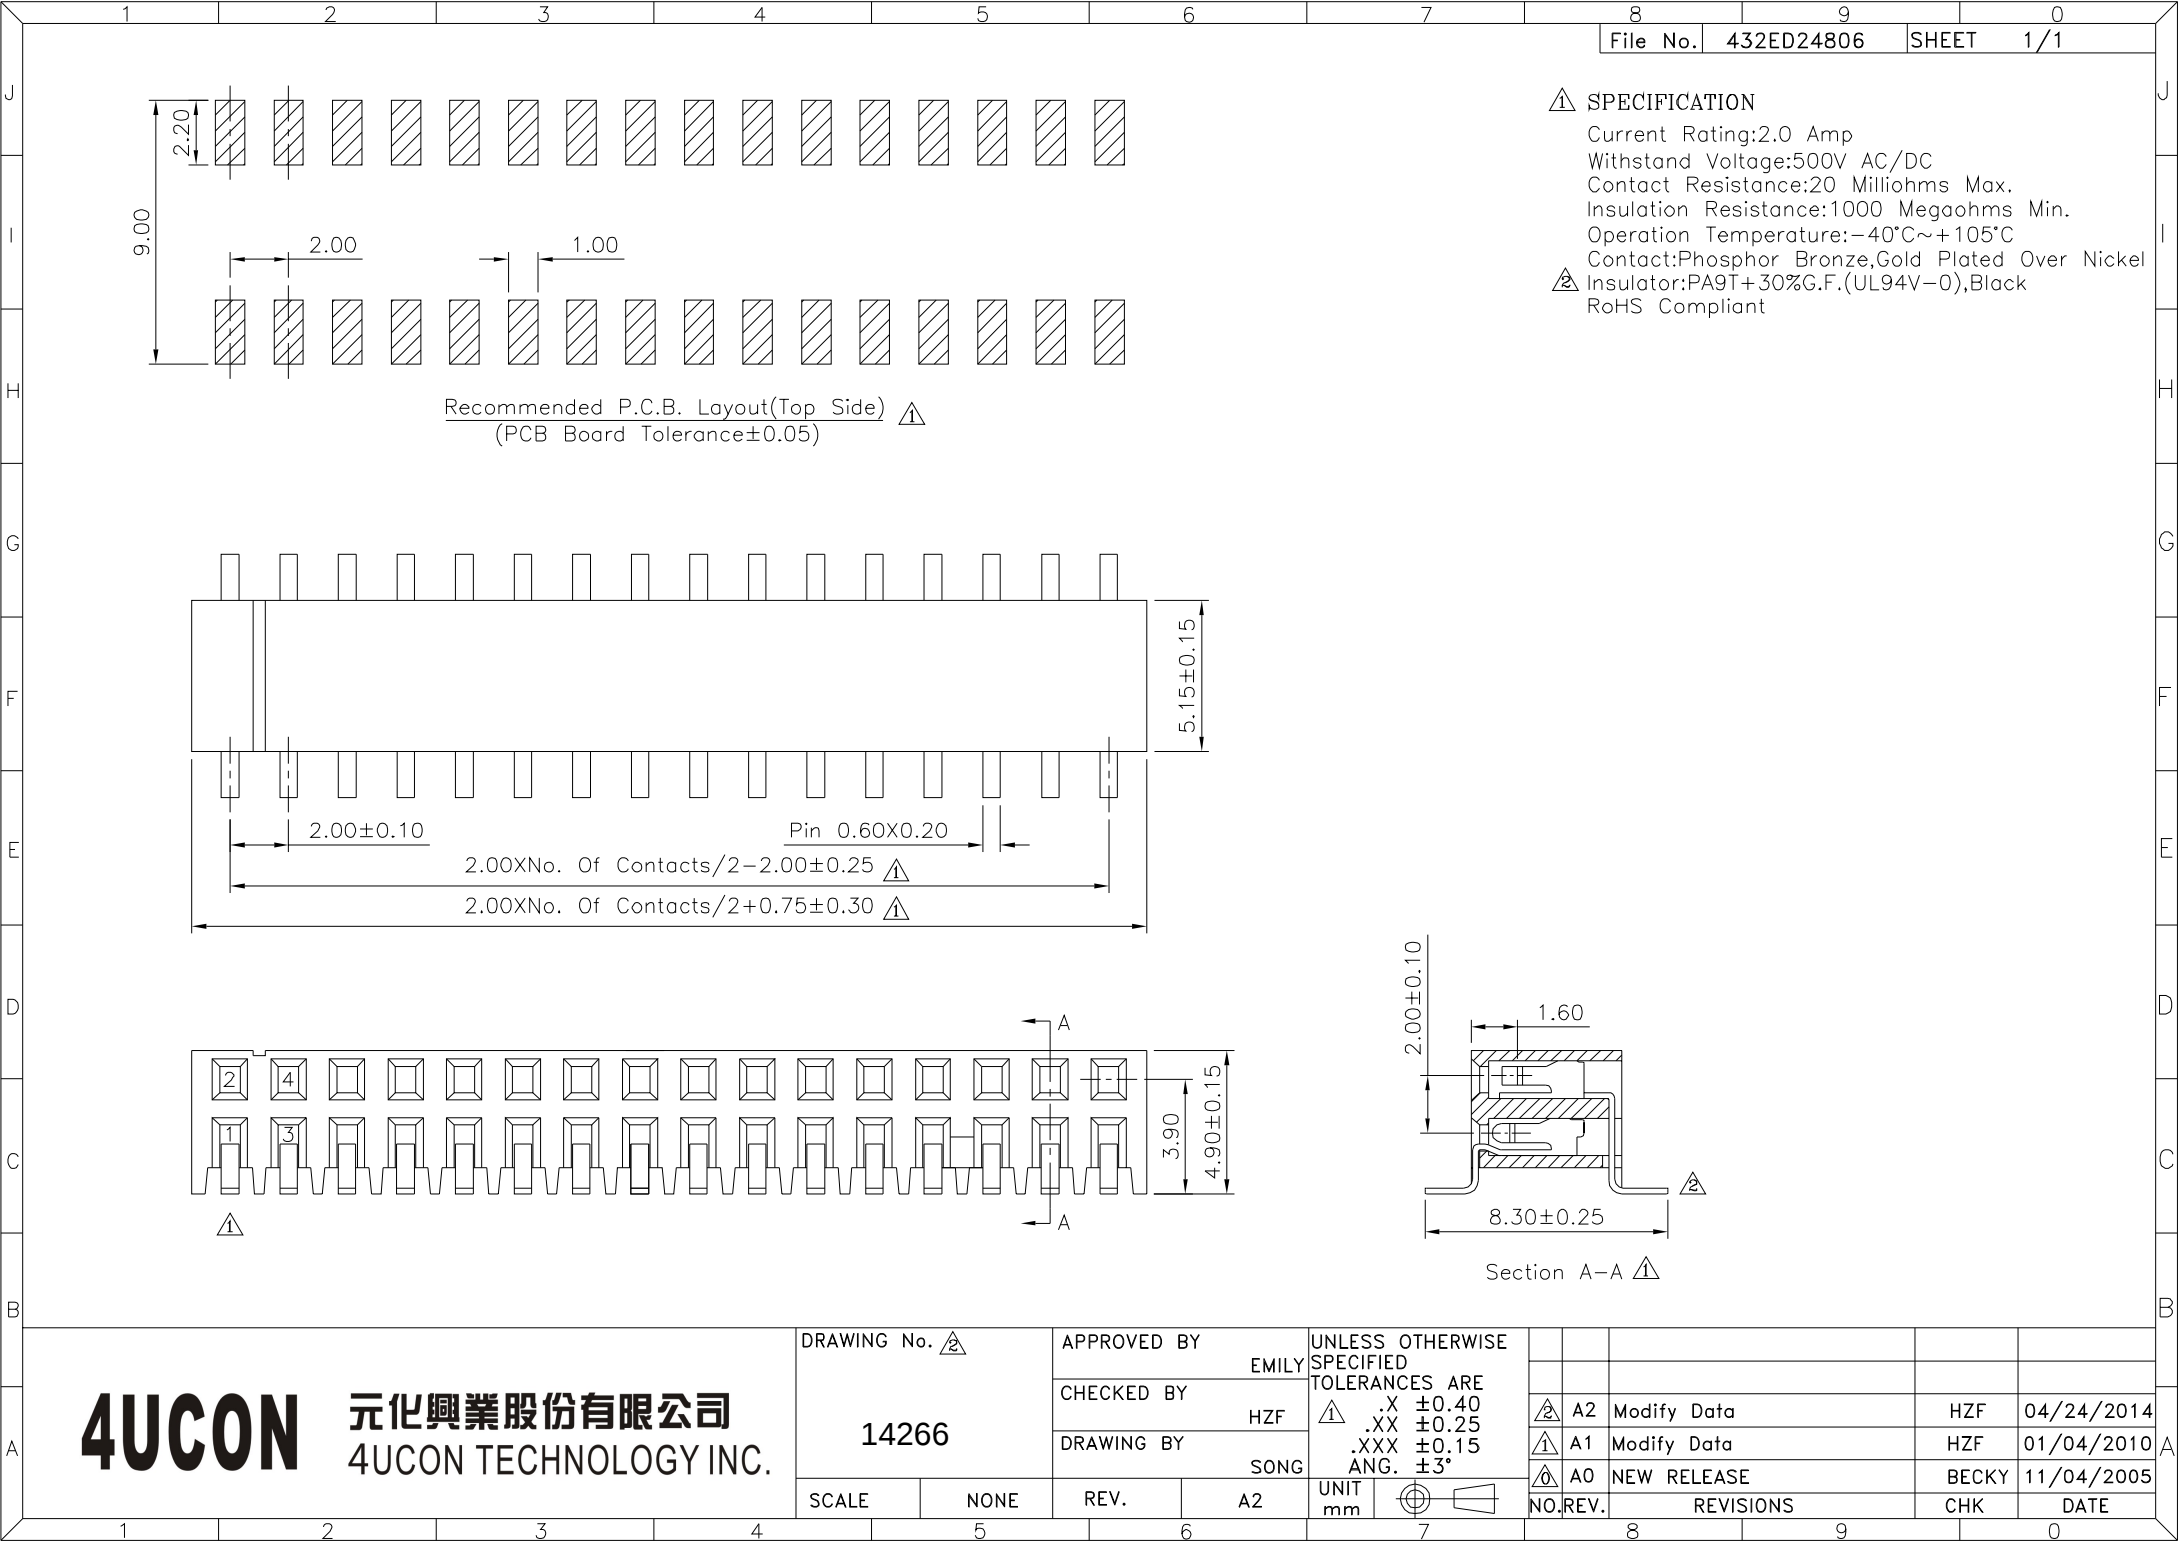

⚠ SPECIFICATION
Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
⚠ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side) ⚠
(PCB Board Tolerance±0.05)

Section A-A ⚠

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. ⚠ 14266		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY SONG	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
⚠ .X	±0.40
⚠ .XX	±0.25
⚠ .XXX	±0.15
⚠ ANG.	±3°
UNIT	mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	04/24/2014
⚠	A1	Modify Data	HZF	01/04/2010
⚠	A0	NEW RELEASE	BECKY	11/04/2005