File No.	432ED24806	SHEET	1/1

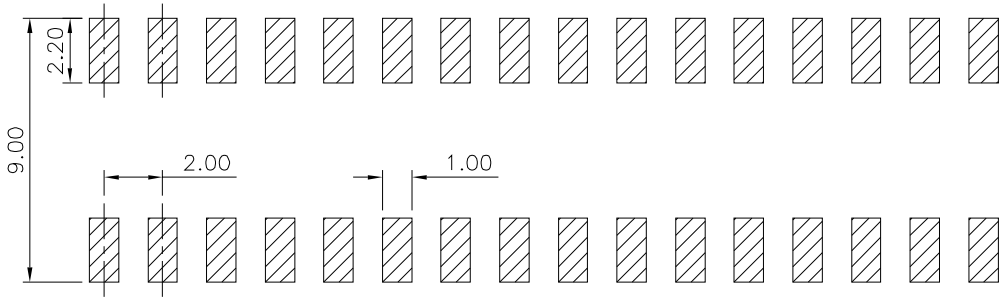

Recommended P.C.B. Layout(Top Side) 1
(PCB Board Tolerance±0.05)

1 SPECIFICATION
Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
2 Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

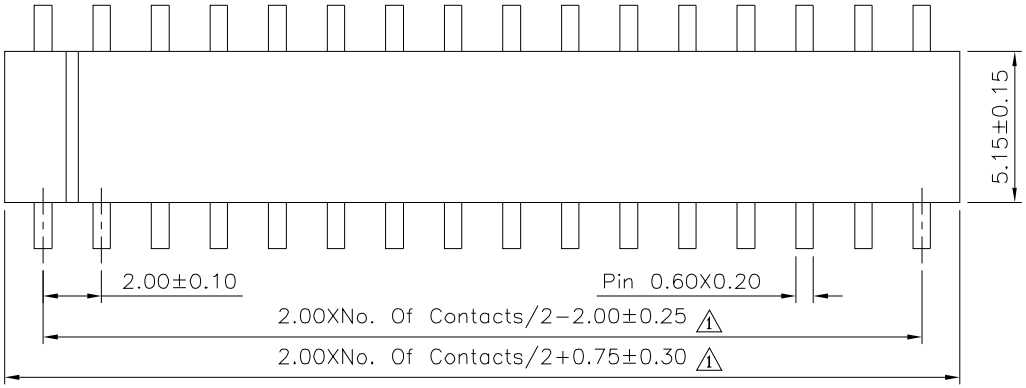

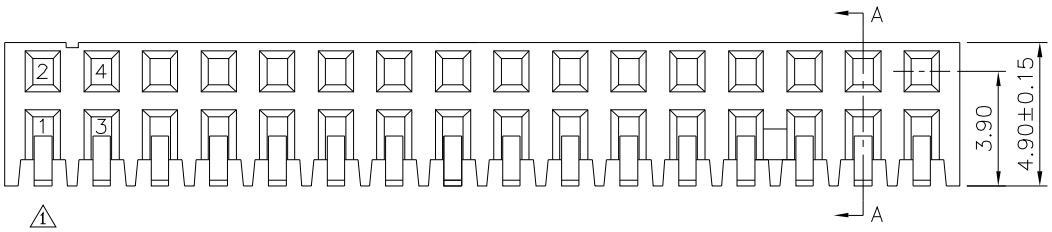



Section A-A 1

2	A2	Modify Data	HZF	04/24/2014
1	A1	Modify Data	HZF	01/04/2010
0	A0	NEW RELEASE	BECKY	11/04/2005
NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2	APPROVED BY EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
14268	CHECKED BY HZF	1 .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°	
	DRAWING BY SONG		
SCALE NONE	REV. A2	UNIT mm	