


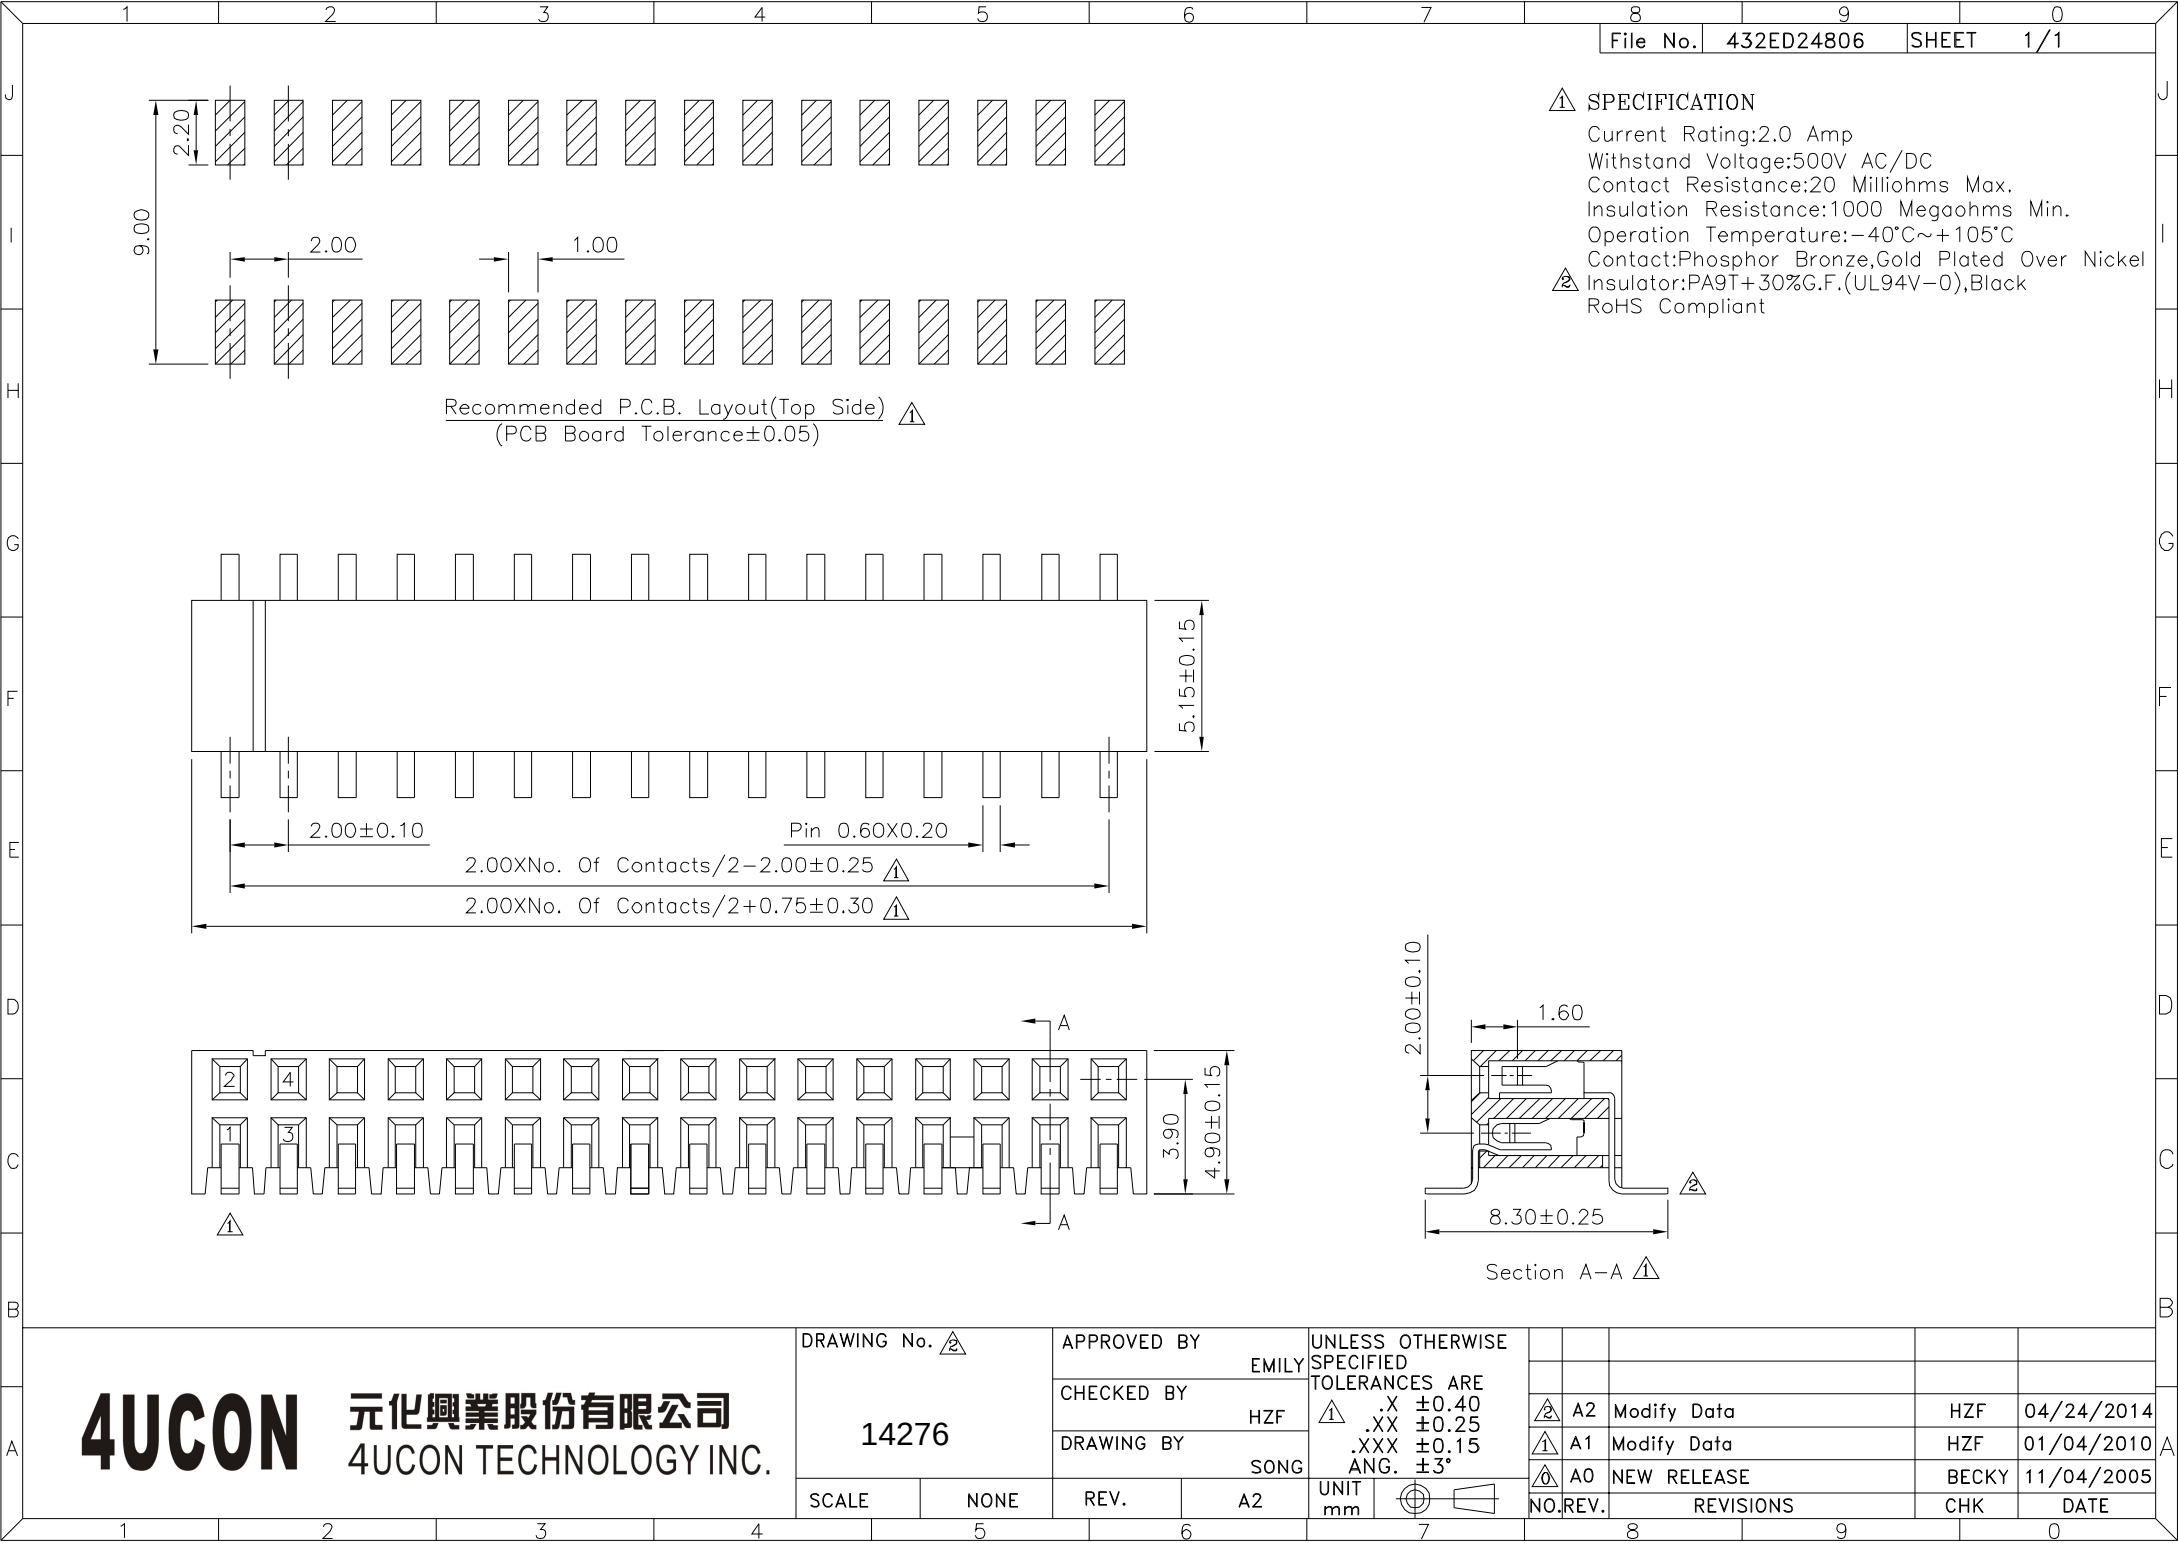

△ SPECIFICATION
Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side) △
(PCB Board Tolerance±0.05)

Section A-A △

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

14276

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY SONG

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.40
△ .XX ±0.25
△ .XXX ±0.15
ANG. ±3°

UNIT
mm



△	A2	Modify Data	HZF	04/24/2014	
△	A1	Modify Data	HZF	01/04/2010	
△	A0	NEW RELEASE	BECKY	11/04/2005	
NO.	REV.	REVISIONS	CHK	DATE	