

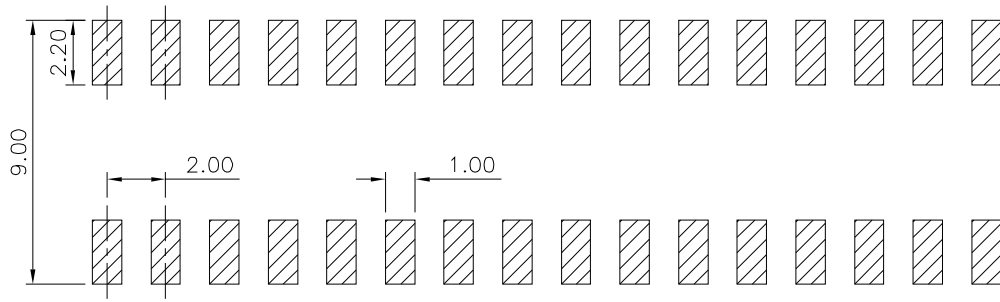



△ SPECIFICATION
Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
⊠ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

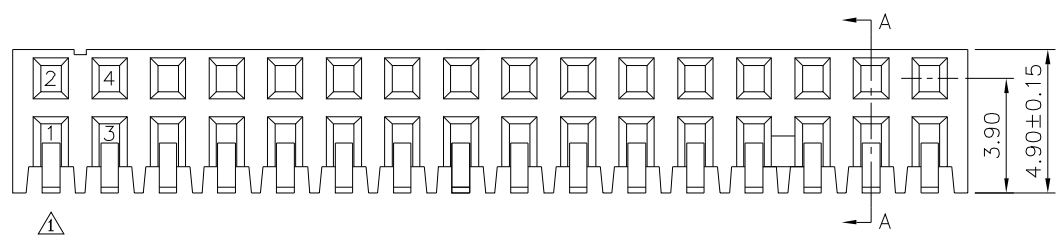

Recommended P.C.B. Layout(Top Side) △
(PCB Board Tolerance±0.05)

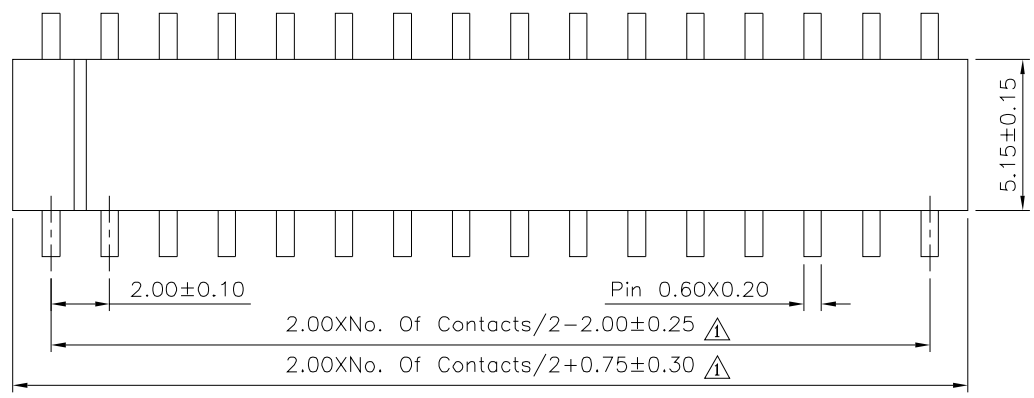

Section A-A △

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. $\triangle$ 14279		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\triangle$.X ± 0.40 $\triangle$.XX ± 0.25 $\triangle$.XXX ± 0.15 ANG. $\pm 3^\circ$						
		EMILY								
		CHECKED BY								
		HZF								
DRAWING BY		SONG			$\triangle$ A2	Modify Data		HZF	04/24/2014	
					$\triangle$ A1	Modify Data		HZF	01/04/2010	
					$\triangle$ A0	NEW RELEASE		BECKY	11/04/2005	
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS	CHK	DATE	
	5		6		7		8	9	0	