


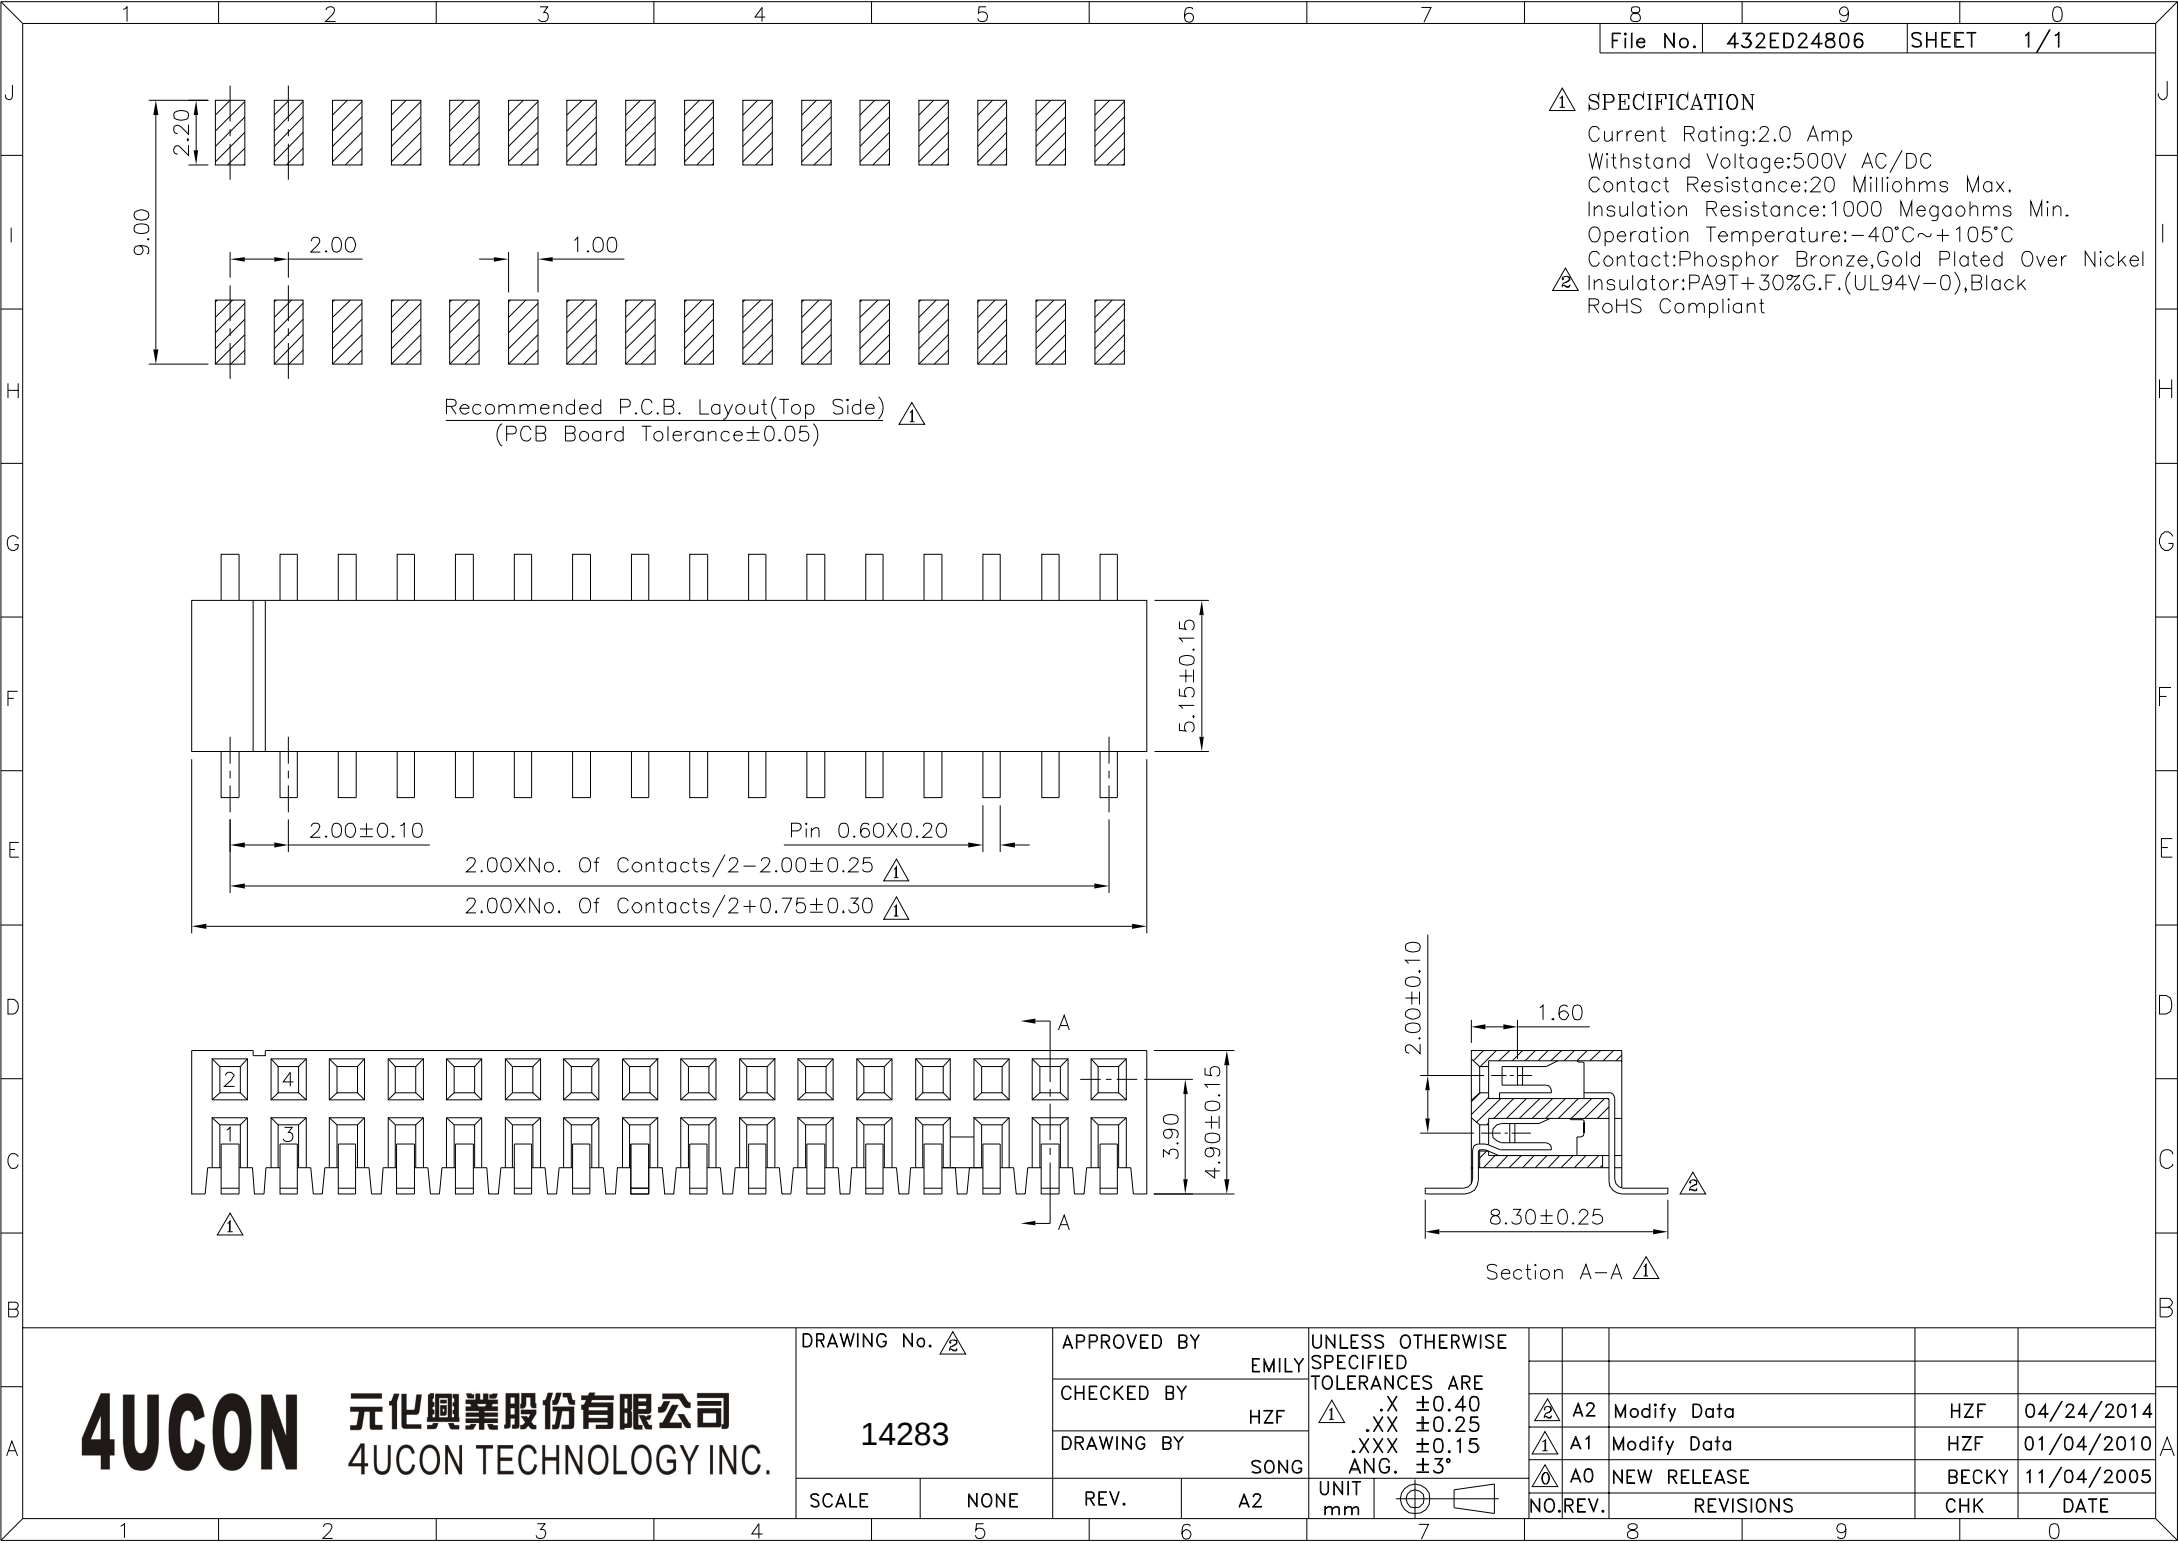

⚠ SPECIFICATION

Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
⚠ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top Side) ⚠
(PCB Board Tolerance±0.05)

Section A-A ⚠

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. ⚠

14283

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
SONG

SCALE	NONE	REV.	A2
-------	------	------	----

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
⚠ .X ±0.40
⚠ .XX ±0.25
⚠ .XXX ±0.15
ANG. ±3°

UNIT
mm



⚠	A2	Modify Data	HZF	04/24/2014	
⚠	A1	Modify Data	HZF	01/04/2010	
⚠	A0	NEW RELEASE	BECKY	11/04/2005	
NO.	REV.	REVISIONS	CHK	DATE	