
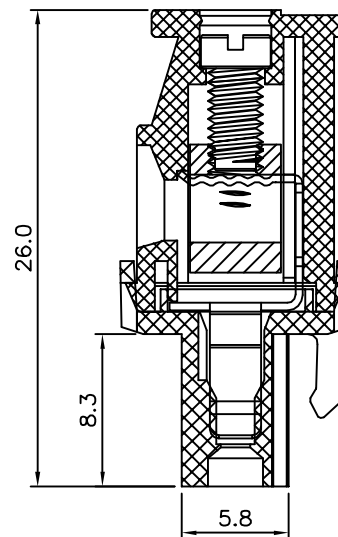
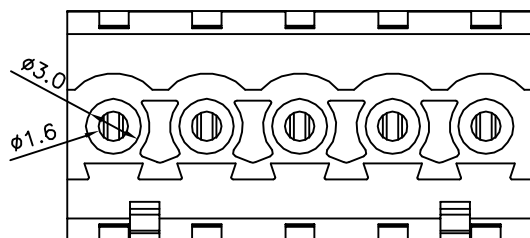
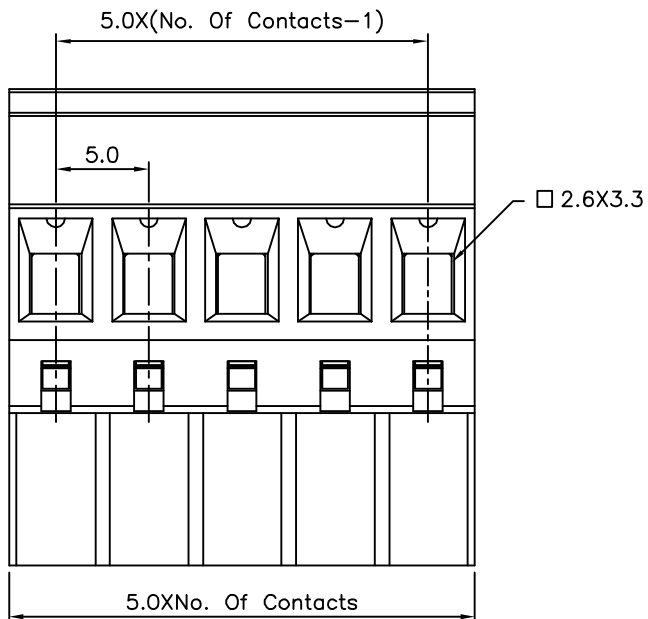


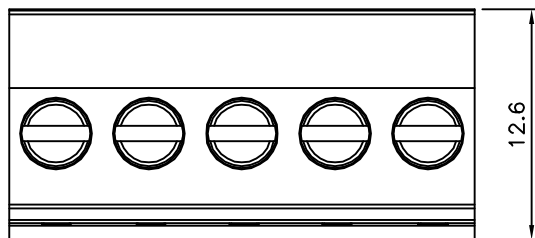

SPECIFICATION

Current Rating:16 Amp/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60s/1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Wire Range:12~26 AWG
Torque:5.0 Kgf.cm/M3
Insulator Body(Housing):Polyamide(UL94V-0),Green
Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

DRAWING No.

14458

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

SCALE

NONE

REV.

A0

UNIT

mm

NO. REV.

REVISIONS

AO

NEW RELEASE

REVISIONS

REVISIONS

HZF

CHK

DATE

03/28/2012

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.