

4/2/1 SPECIFICATION

1.Material&Finish:

Insulator:PA9T(UL94V-0),Ivory
Slider:PPS(UL94V-0),Black
Terminal:Phosphor Bronze,Tin Plated
Over Nickel
Me:Brass,Tin Plated Over Nickel



2.Electrical Characteristics:

Operation Voltage:50V Max.
Current Rating:0.5 Amp Max.
Contact Resistance:20 Milliohms Max.
Insulation Resistance:50 Megaohms Min.
Dielectric Withstanding Voltage:250V AC RMS.



3.Environmental Characteristics:

Operation Temperature:-40°C~+105°C


4.RoHS Compliant

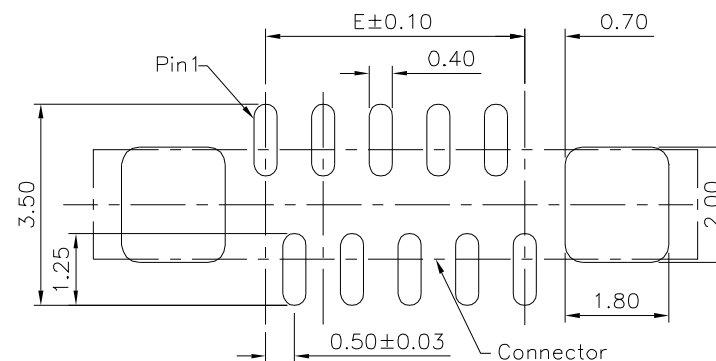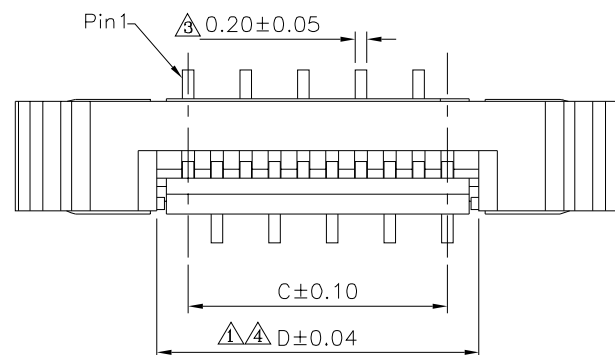

4/3 Recommended PCB Layout

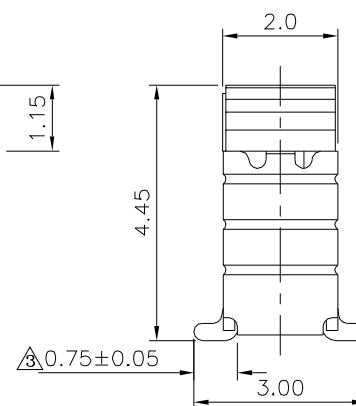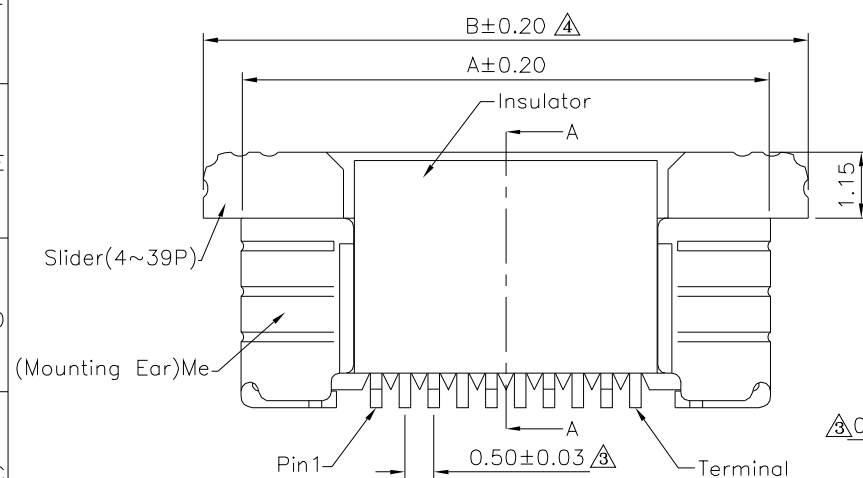

4~39 Pin

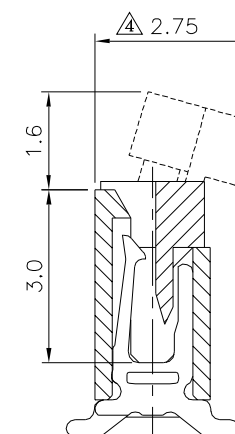

Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2/4

14707

SCALE

NONE

REV.

A4

APPROVED BY

MEI


CHECKED BY

HZF



DRAWING BY

CYP




UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.

UNIT
mm

4/A4	Modify Data	HZF	03/19/2020
3/A3	Modify Data	HZF	12/05/2014
2/A2	Modify Data	HZF	11/11/2011
1/A1	Modify Data	HZF	05/19/2009
0/A0	NEW RELEASE	HZF	01/26/2007
NO. REV.	REVISIONS	CHK	DATE

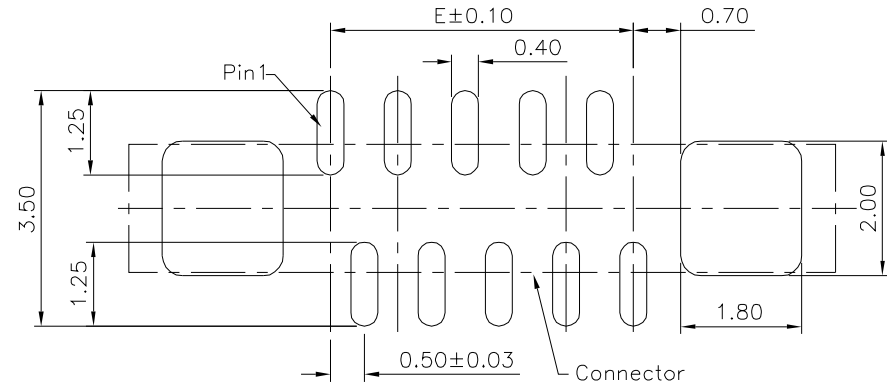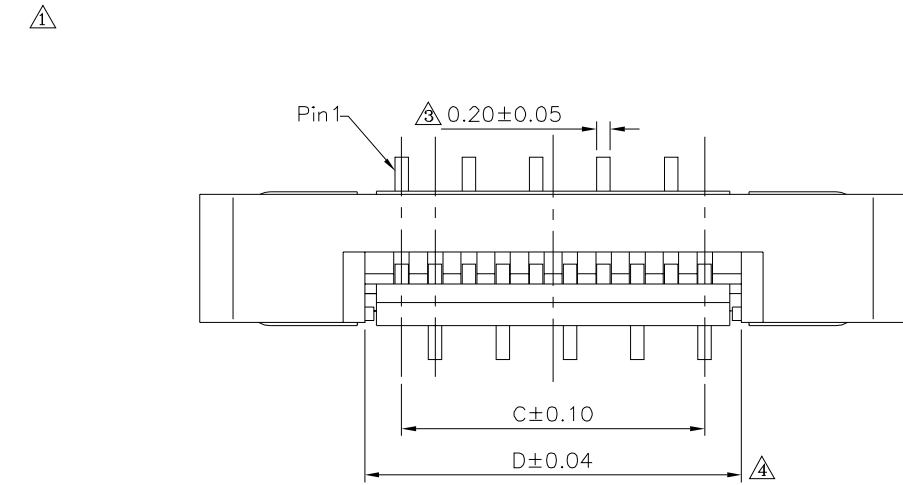

Recommended PCB Layout

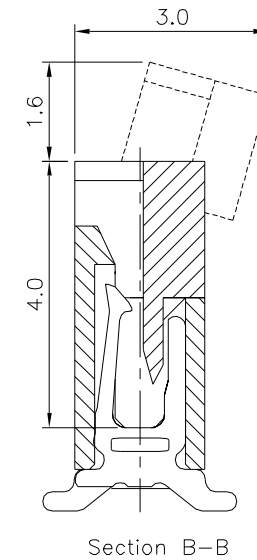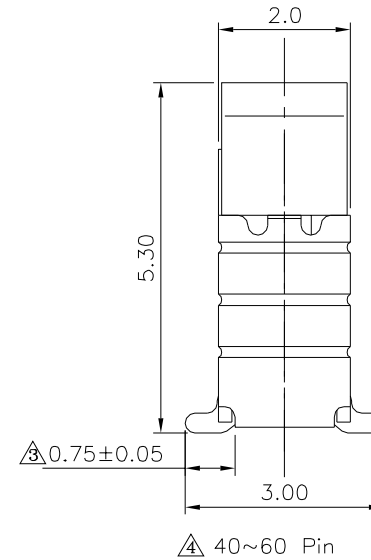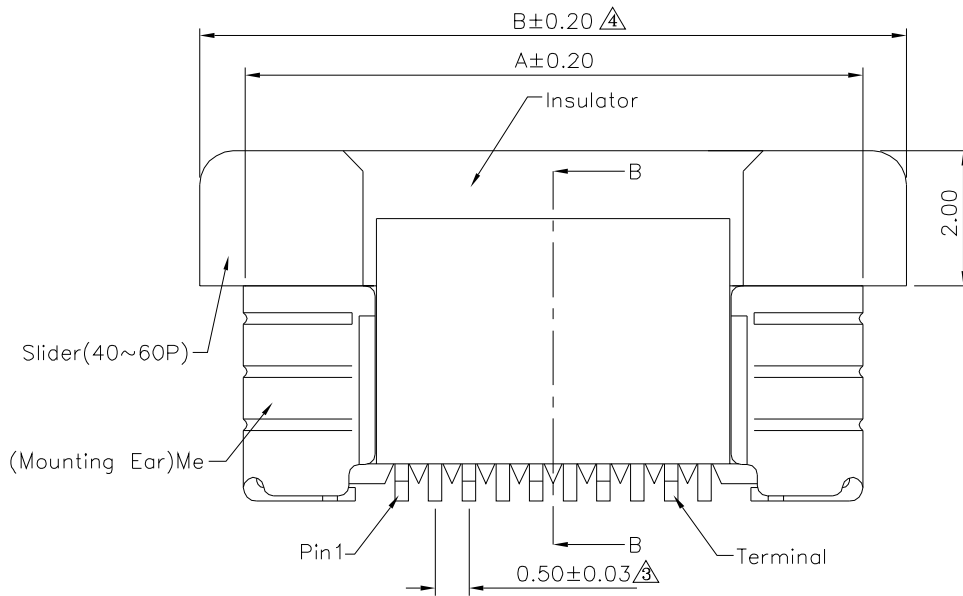

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 14707

14707

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF



DRAWING BY CYP

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.35
.XX ± 0.20
ANG.

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	03/19/2020
3	A3	Modify Data	HZF	12/05/2014
2	A2	Modify Data	HZF	11/11/2011
1	A1	Modify Data	HZF	05/19/2009
0	A0	NEW RELEASE	HZF	01/26/2007

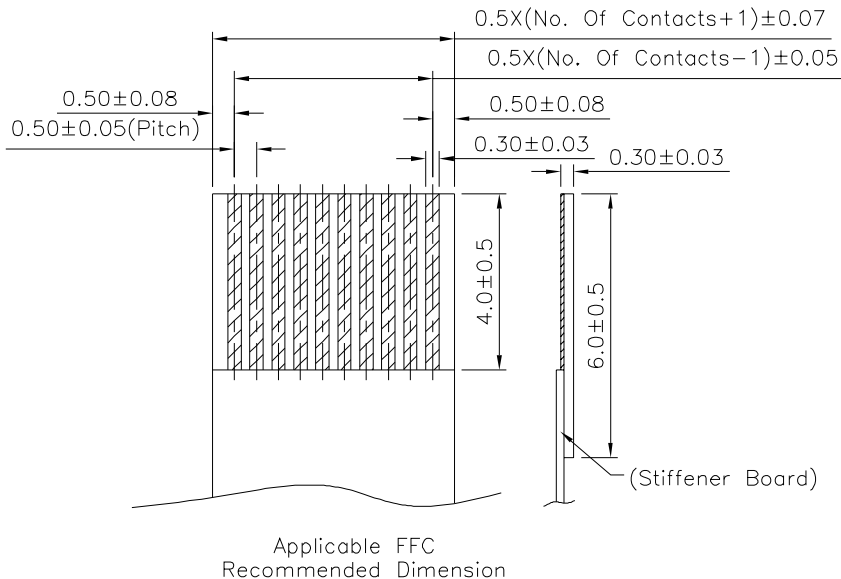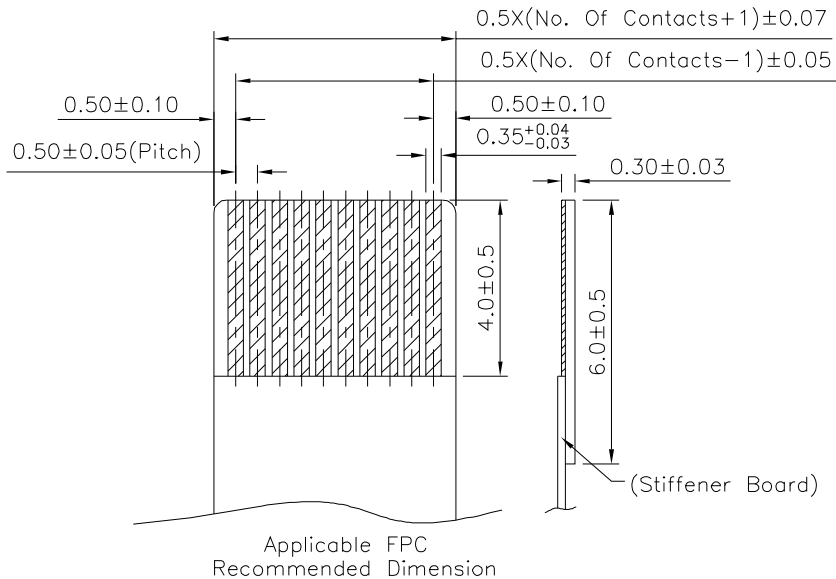

8		9		0		
File No.	594KC19217	SHEET		3/3		
△	Pin	A	B	C	D	E
	4	6.20	7.50	1.50	2.62	1.50
	5	6.70	8.00	2.00	3.12	2.00
	6	7.20	8.50	2.50	3.62	2.50
	7	7.70	9.00	3.00	4.12	3.00
	8	8.20	9.50	3.50	4.62	3.50
	9	8.70	10.00	4.00	5.12	4.00
	10	9.20	10.50	4.50	5.62	4.50
	11	9.70	11.00	5.00	6.12	5.00
	12	10.20	11.50	5.50	6.62	5.50
	13	10.70	12.00	6.00	7.12	6.00
	14	11.20	12.50	6.50	7.62	6.50
	15	11.70	13.00	7.00	8.12	7.00
	16	12.20	13.50	7.50	8.62	7.50
	17	12.70	14.00	8.00	9.12	8.00
	18	13.20	14.50	8.50	9.62	8.50
	19	13.70	15.00	9.00	10.12	9.00
	20	14.20	15.50	9.50	10.62	9.50
	21	14.70	16.00	10.00	11.12	10.00
	22	15.20	16.50	10.50	11.62	10.50
	23	15.70	17.00	11.00	12.12	11.00
	24	16.20	17.50	11.50	12.62	11.50
	25	16.70	18.00	12.00	13.12	12.00
	26	17.20	18.50	12.50	13.62	12.50
	27	17.70	19.00	13.00	14.12	13.00
	28	18.20	19.50	13.50	14.62	13.50
	29	18.70	20.00	14.00	15.12	14.00
	30	19.20	20.50	14.50	15.62	14.50
	31	19.70	21.00	15.00	16.12	15.00
	32	20.20	21.50	15.50	16.62	15.50
	33	20.70	22.00	16.00	17.12	16.00
	34	21.20	22.50	16.50	17.62	16.50
	35	21.70	23.00	17.00	18.12	17.00
	36	22.20	23.50	17.50	18.62	17.50
	37	22.70	24.00	18.00	19.12	18.00
	38	23.20	24.50	18.50	19.62	18.50
	39	23.70	25.00	19.00	20.12	19.00
	40	24.20	25.50	19.50	20.62	19.50
	41	24.70	26.00	20.00	21.12	20.00
	42	25.20	26.50	20.50	21.62	20.50
	43	25.70	27.00	21.00	22.12	21.00
	44	26.20	27.50	21.50	22.62	21.50
	45	26.70	28.00	22.00	23.12	22.00
	46	27.20	28.50	22.50	23.62	22.50
	47	27.70	29.00	23.00	24.12	23.00
	48	28.20	29.50	23.50	24.62	23.50
	49	28.70	30.00	24.00	25.12	24.00
	50	29.20	30.50	24.50	25.62	24.50
	51	29.70	31.00	25.00	26.12	25.00
	52	30.20	31.50	25.50	26.62	25.50
	53	30.70	32.00	26.00	27.12	26.00
	54	31.20	32.50	26.50	27.62	26.50
	55	31.70	33.00	27.00	28.12	27.00
	56	32.20	33.50	27.50	28.62	27.50
	57	32.70	34.00	28.00	29.12	28.00
	58	33.20	34.50	28.50	29.62	28.50
	59	33.70	35.00	29.00	30.12	29.00
	60	34.20	35.50	29.50	30.62	29.50



The All Numbers Tooled Ready

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14707

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.

UNIT
mm



NO.

REV.

Modify Data

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

03/19/2020

12/05/2014

11/11/2011

05/19/2009

01/26/2007