

4/2/1 SPECIFICATION

1.Material&Finish:

Insulator:PA9T(UL94V-0),Ivory
Slider:PPS(UL94V-0),Black
Terminal:Phosphor Bronze,Tin Plated
Over Nickel
Me:Brass,Tin Plated Over Nickel



2.Electrical Characteristics:

Operation Voltage:50V Max.
Current Rating:0.5 Amp Max.
Contact Resistance:20 Milliohms Max.
Insulation Resistance:50 Megaohms Min.
Dielectric Withstanding Voltage:250V AC RMS.



3.Environmental Characteristics:

Operation Temperature:-40°C~+105°C


4.RoHS Compliant

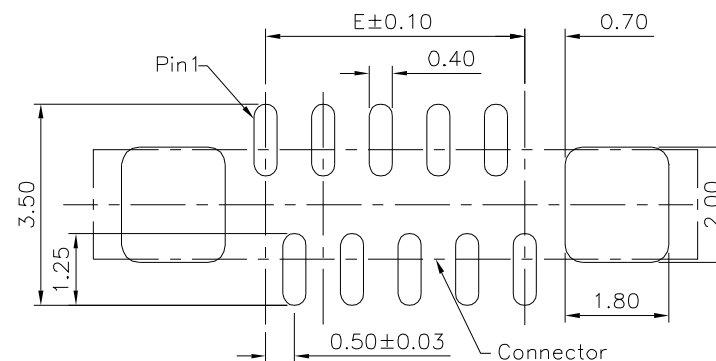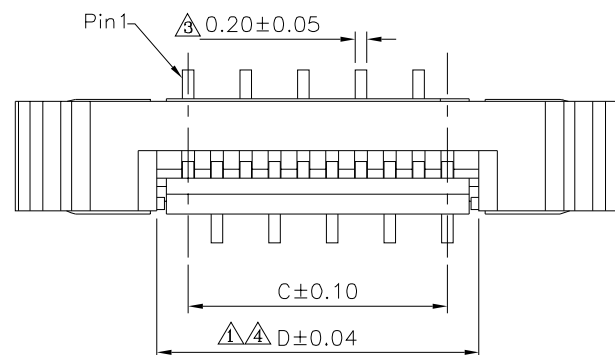

4/3 Recommended PCB Layout

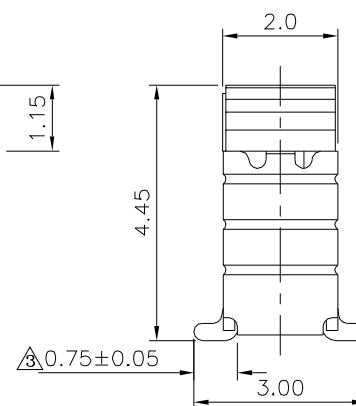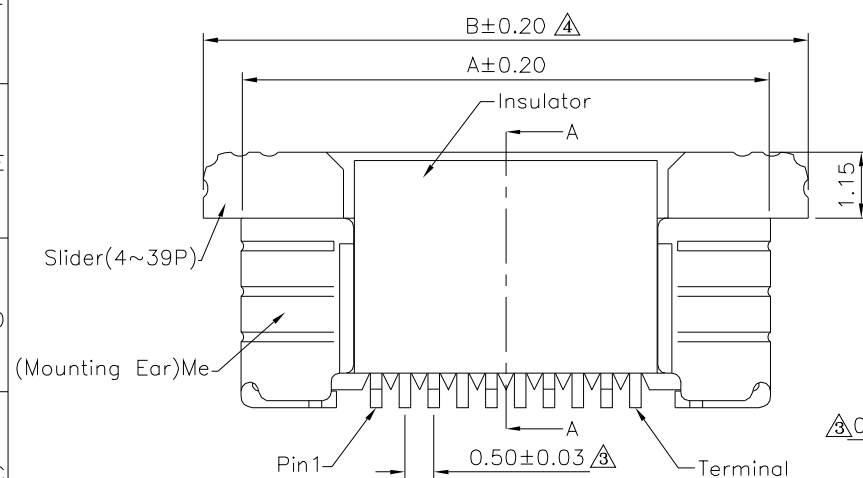

4/4 4~39 Pin

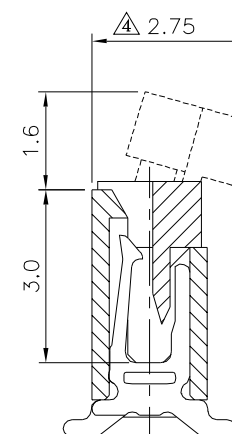

Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 4/2/4

14719

SCALE

NONE

REV.

A4

APPROVED BY

MEI


CHECKED BY

HZF






DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.

UNIT
mm

4/A4	Modify Data	HZF	03/19/2020
3/A3	Modify Data	HZF	12/05/2014
2/A2	Modify Data	HZF	11/11/2011
1/A1	Modify Data	HZF	05/19/2009
0/A0	NEW RELEASE	HZF	01/26/2007
NO. REV.	REVISIONS	CHK	DATE

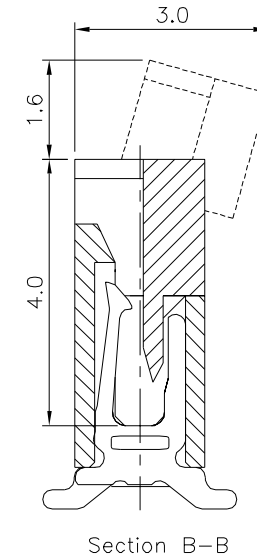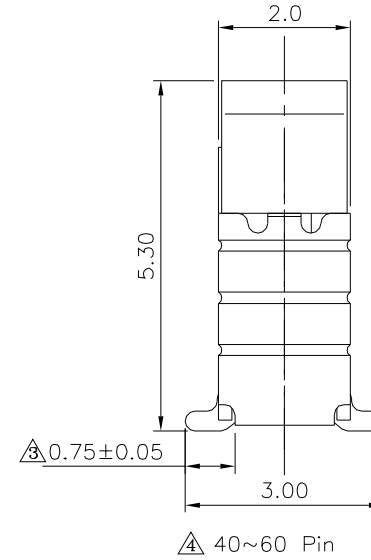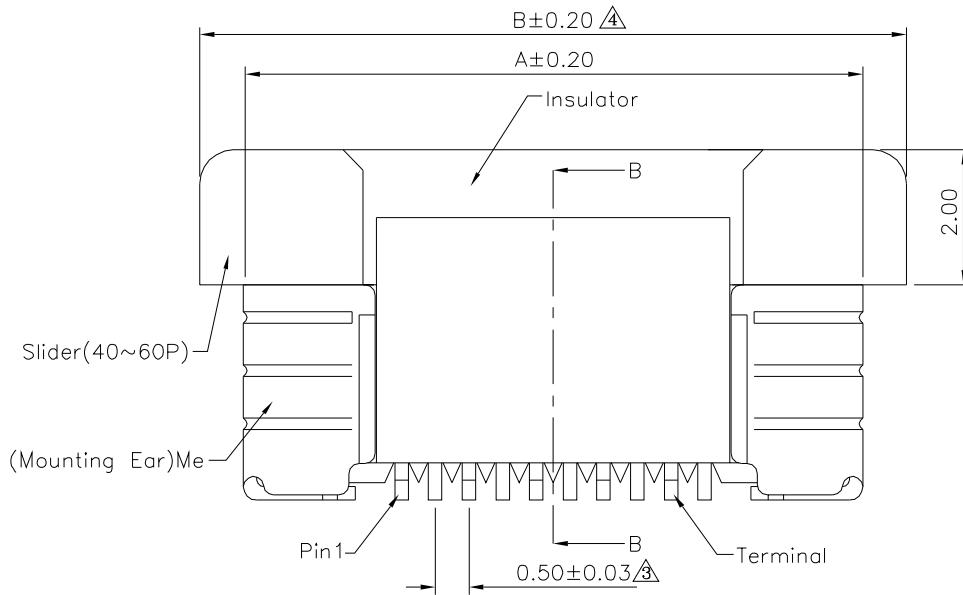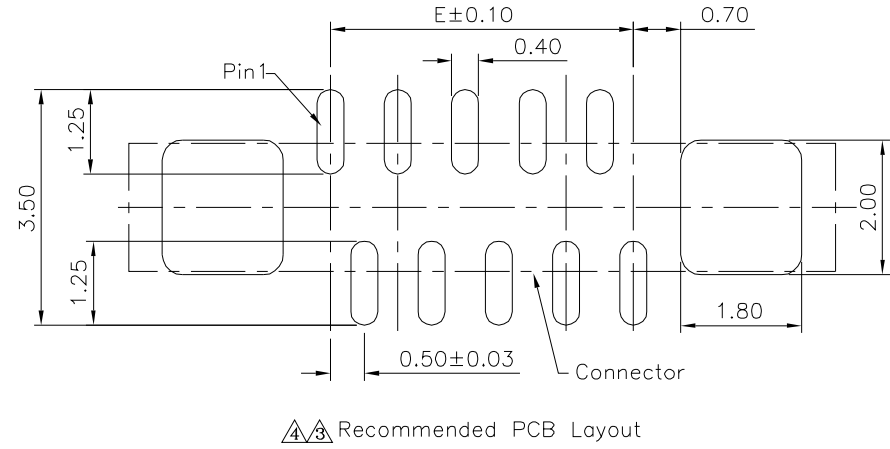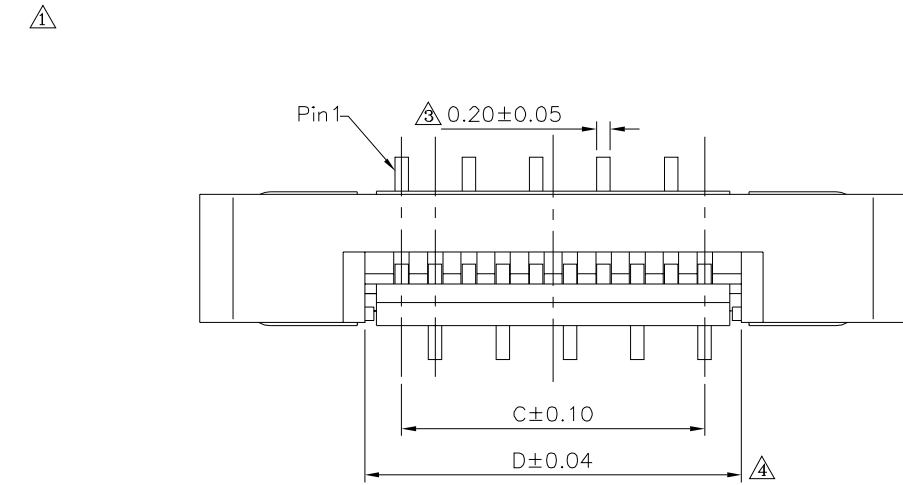

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 14719

14719

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF



DRAWING BY CYP

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	03/19/2020
3	A3	Modify Data	HZF	12/05/2014
2	A2	Modify Data	HZF	11/11/2011
1	A1	Modify Data	HZF	05/19/2009
0	A0	NEW RELEASE	HZF	01/26/2007

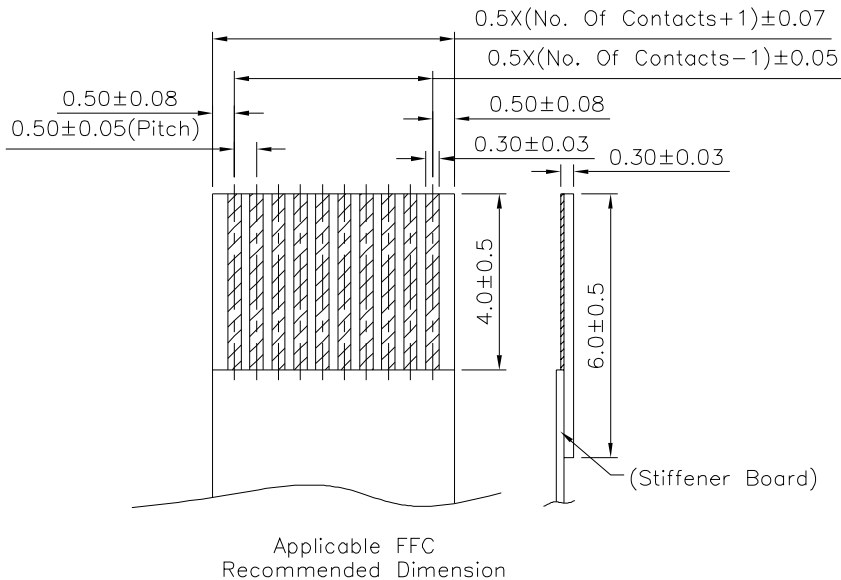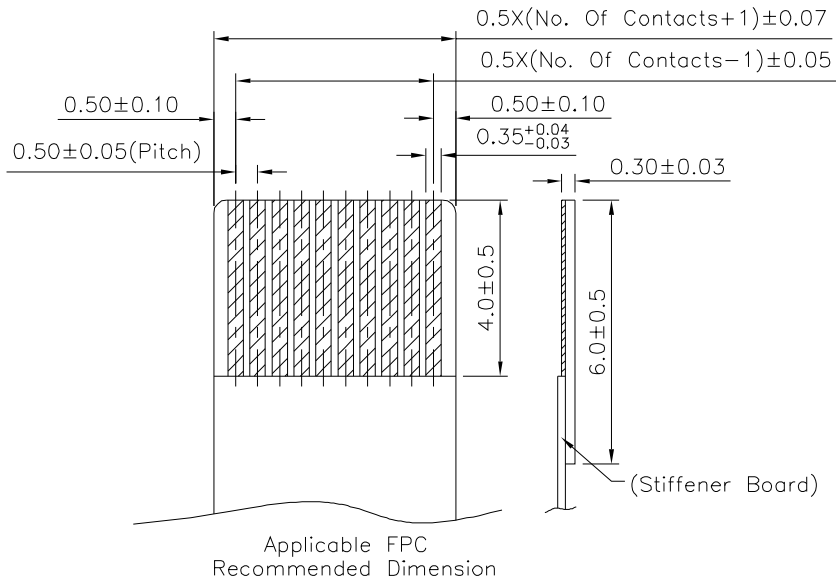

File No.	594KC19217			SHEET 3/3		
△	Pin	A	B	C	D	E
	4	6.20	7.50	1.50	2.62	1.50
	5	6.70	8.00	2.00	3.12	2.00
	6	7.20	8.50	2.50	3.62	2.50
	7	7.70	9.00	3.00	4.12	3.00
	8	8.20	9.50	3.50	4.62	3.50
	9	8.70	10.00	4.00	5.12	4.00
	10	9.20	10.50	4.50	5.62	4.50
	11	9.70	11.00	5.00	6.12	5.00
	12	10.20	11.50	5.50	6.62	5.50
	13	10.70	12.00	6.00	7.12	6.00
	14	11.20	12.50	6.50	7.62	6.50
	15	11.70	13.00	7.00	8.12	7.00
	16	12.20	13.50	7.50	8.62	7.50
	17	12.70	14.00	8.00	9.12	8.00
	18	13.20	14.50	8.50	9.62	8.50
	19	13.70	15.00	9.00	10.12	9.00
	20	14.20	15.50	9.50	10.62	9.50
	21	14.70	16.00	10.00	11.12	10.00
	22	15.20	16.50	10.50	11.62	10.50
	23	15.70	17.00	11.00	12.12	11.00
	24	16.20	17.50	11.50	12.62	11.50
	25	16.70	18.00	12.00	13.12	12.00
	26	17.20	18.50	12.50	13.62	12.50
	27	17.70	19.00	13.00	14.12	13.00
	28	18.20	19.50	13.50	14.62	13.50
	29	18.70	20.00	14.00	15.12	14.00
	30	19.20	20.50	14.50	15.62	14.50
	31	19.70	21.00	15.00	16.12	15.00
	32	20.20	21.50	15.50	16.62	15.50
	33	20.70	22.00	16.00	17.12	16.00
	34	21.20	22.50	16.50	17.62	16.50
	35	21.70	23.00	17.00	18.12	17.00
	36	22.20	23.50	17.50	18.62	17.50
	37	22.70	24.00	18.00	19.12	18.00
	38	23.20	24.50	18.50	19.62	18.50
	39	23.70	25.00	19.00	20.12	19.00
	40	24.20	25.50	19.50	20.62	19.50
	41	24.70	26.00	20.00	21.12	20.00
	42	25.20	26.50	20.50	21.62	20.50
	43	25.70	27.00	21.00	22.12	21.00
	44	26.20	27.50	21.50	22.62	21.50
	45	26.70	28.00	22.00	23.12	22.00
	46	27.20	28.50	22.50	23.62	22.50
	47	27.70	29.00	23.00	24.12	23.00
	48	28.20	29.50	23.50	24.62	23.50
	49	28.70	30.00	24.00	25.12	24.00
	50	29.20	30.50	24.50	25.62	24.50
	51	29.70	31.00	25.00	26.12	25.00
	52	30.20	31.50	25.50	26.62	25.50
	53	30.70	32.00	26.00	27.12	26.00
	54	31.20	32.50	26.50	27.62	26.50
	55	31.70	33.00	27.00	28.12	27.00
	56	32.20	33.50	27.50	28.62	27.50
	57	32.70	34.00	28.00	29.12	28.00
	58	33.20	34.50	28.50	29.62	28.50
	59	33.70	35.00	29.00	30.12	29.00
	60	34.20	35.50	29.50	30.62	29.50



△ The All Numbers Tooled Ready

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2/4

14719

SCALE NONE REV. A4

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.35
.XX ±0.20
ANG.

UNIT mm

NO. REV.

REVISIONS

CHK DATE

A4 Modify Data HZF 03/19/2020

A3 Modify Data HZF 12/05/2014

A2 Modify Data HZF 11/11/2011

A1 Modify Data HZF 05/19/2009

A0 NEW RELEASE HZF 01/26/2007