





△ SPECIFICATION
 Current Rating: 7A AC/DC
 Voltage Rating: 600V AC/DC
 Withstanding Voltage: 1500V AC/Minute
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Temperature Range: -25°C ~ +85°C
△ Insulator: PA66, UL94V-2, Nature Color
 Contact: Brass, Tin Plated Over Nickel
 RoHS Compliant

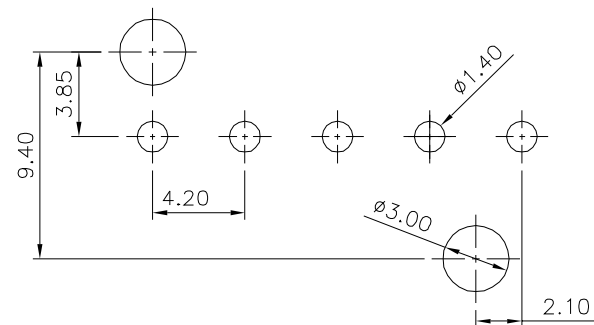


Recommended P.C.B. Layout

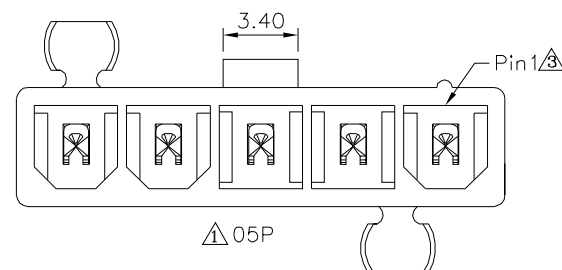


△ 05P

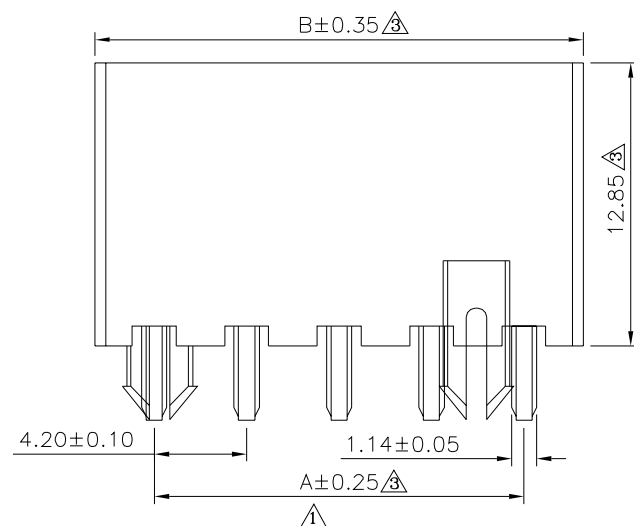


△ 03P

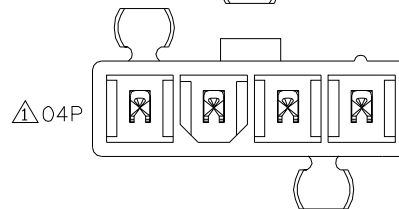

△ 04P

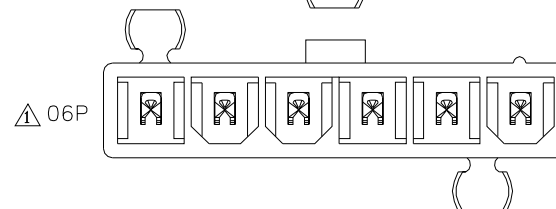

△ 06P

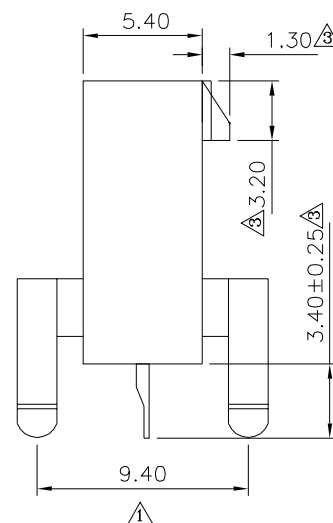

Pin	A	B
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △ 1

14852

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ X. ±0.30
 XX ±0.25
 XXX ±0.20
 ANG. ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ 3	A3	Modify Data	HZF	07/02/2020
△ 2	A2	Modify Data	HZF	01/03/2017
△ 1	A1	Modify Data	HZF	05/10/2016
△ 0	A0	NEW RELEASE	HZF	12/03/2012