



SPECIFICATION





Current Rating:1.5 Amp Per Contact
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−20°C~+85°C
 Insulator:LCP(UL94V−0),Black
 Contact:Brass,Gold Plated 15u" On Contact
 Area,Tin Plated On Solder Tails,Over Nickel
 Latch:Brass,Tin Plated Over Nickel
 RoHS Compliant

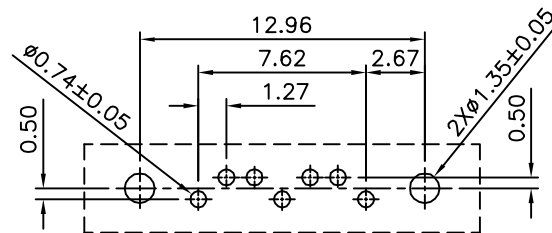

Recommended P.C.B. Layout



Section A-A

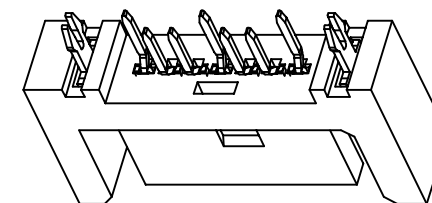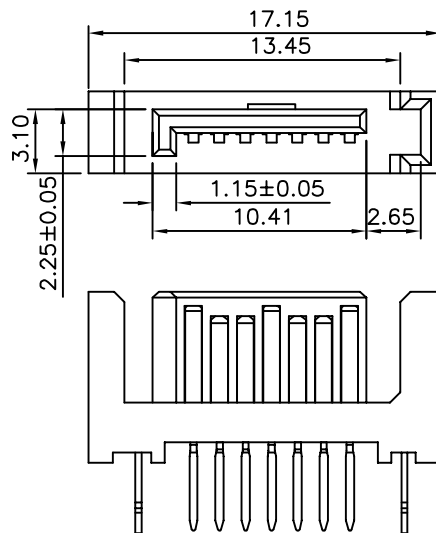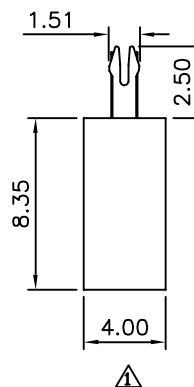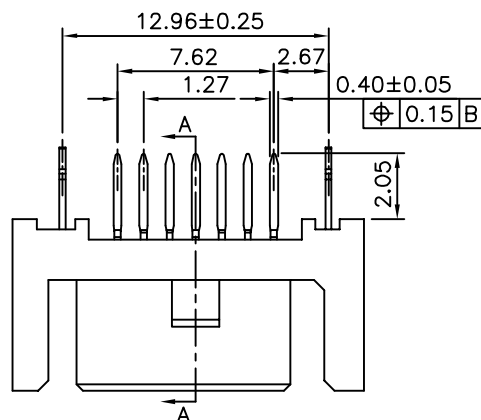

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14874

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.20

.XX ±0.15

ANG. ±1°

SCALE

NONE

REV.

A2

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	07/06/2015
△A1		Modify Data	HZF	07/26/2012
△A0		NEW RELEASE	HZF	08/09/2009