
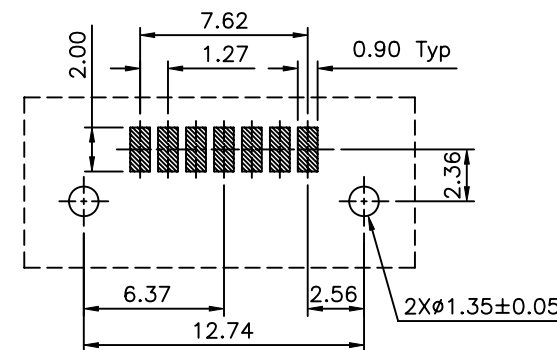
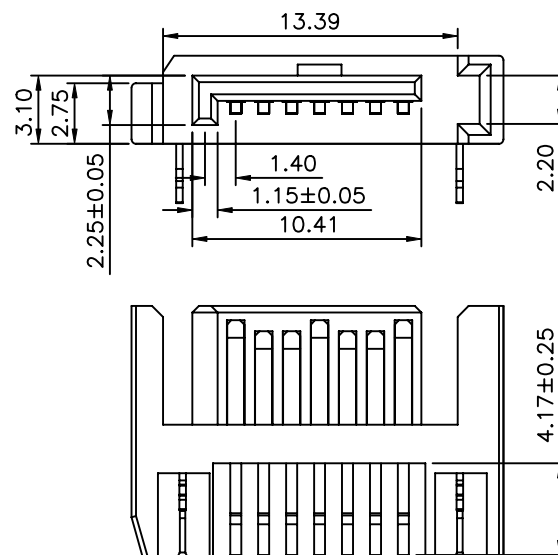

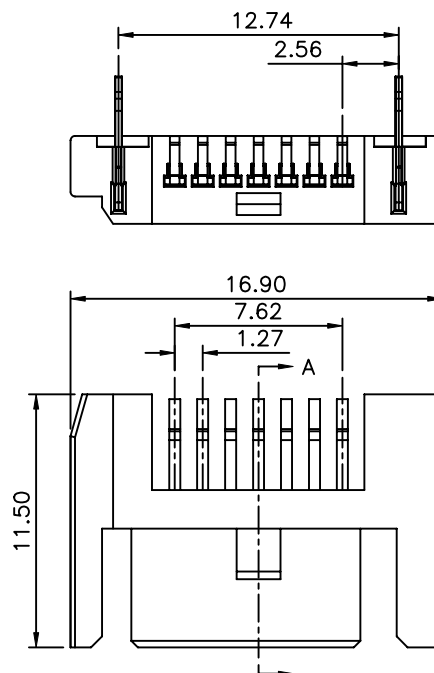


SPECIFICATION

Current Rating:1.5 Amp Per Contact
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-20°C~+85°C
 Housing:LCP(UL94V-0),Black
 Contact:Copper Alloy
 Gold Flash On Contact Area,Misty Tin
 Plated On Solder Tail,Under Nickel
 Latch:Copper Alloy
 RoHS Compliant

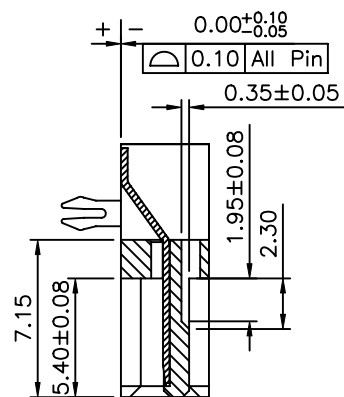

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14875

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.20
 .XX ±0.15
 ANG. ±1°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

01/28/2010