



△△ SPECIFICATION

Current Range:50mA,12V DC
Dielectric Withstand Voltage:250V AC(50Hz Or 60Hz)
For 1 Minute


Contact Resistance:100 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Operation Temperature Range:-25°C~+70°C
Storage Temperature Range:-30°C~+80°C
RoHS Compliant

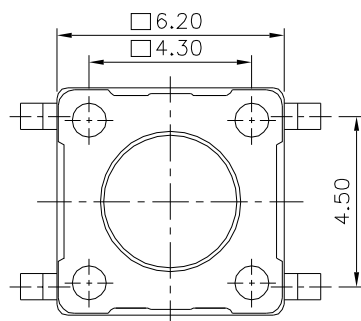


△

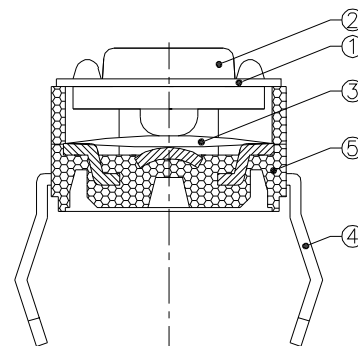


△




Recommended P.C.B. Layout

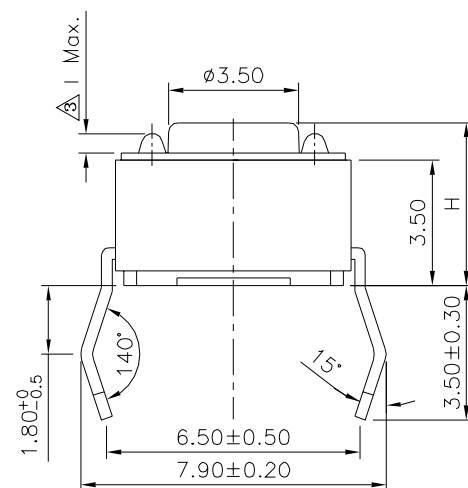

△△

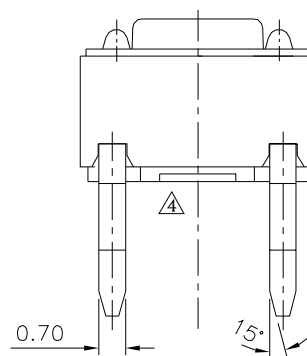

△



Circuit Diagram

Stem color	Operating force
Brown(Standard)	160g
Black	100g
Blue	70g
Red	260g
Orange	320g
Yellow	520g

△ Dim. H	Dim. I
4.3 (Standard)	0.5
5.0	0.6
7.0	
9.5	
13.0	

△	⑤	Base	1	PA66,UL94V-0	Black
△	④	Terminal	1	Brass	Silver Plated
△	③	Contact	1	Phosphor Bronze	Silver Cladding
△	②	Stem	1	PA66,UL94V-0	_____
△	①	Cover	1	Stainless Steel	_____
NO.	REV.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14920

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.20
.XX ±0.20

UNIT
mm



△	A4	Modify Data	HZF	08/25/2014
△	A3	Modify Data	HZF	08/03/2010
△	A2	Modify Data	HZF	07/26/2010
△	A1	Modify Data	HZF	06/23/2010
△	A0	NEW RELEASE	BECKY	04/14/2005
NO.	REV.	REVISIONS	CHK	DATE