


△ SPECIFICATION

- △ Current:7.0A Max.
- Voltage:250V Max.
- Withstanding Voltage:1500V
- Insulation Resistance:500K Megaohms Min.
- Temperature Range:-40°C~+105°C
- △ Housing:PA66(UL94V-2),White
- △ Contact:Brass,Tin Plated Over Nickel
- RoHS Compliant

Recommended P.C.B. Layout

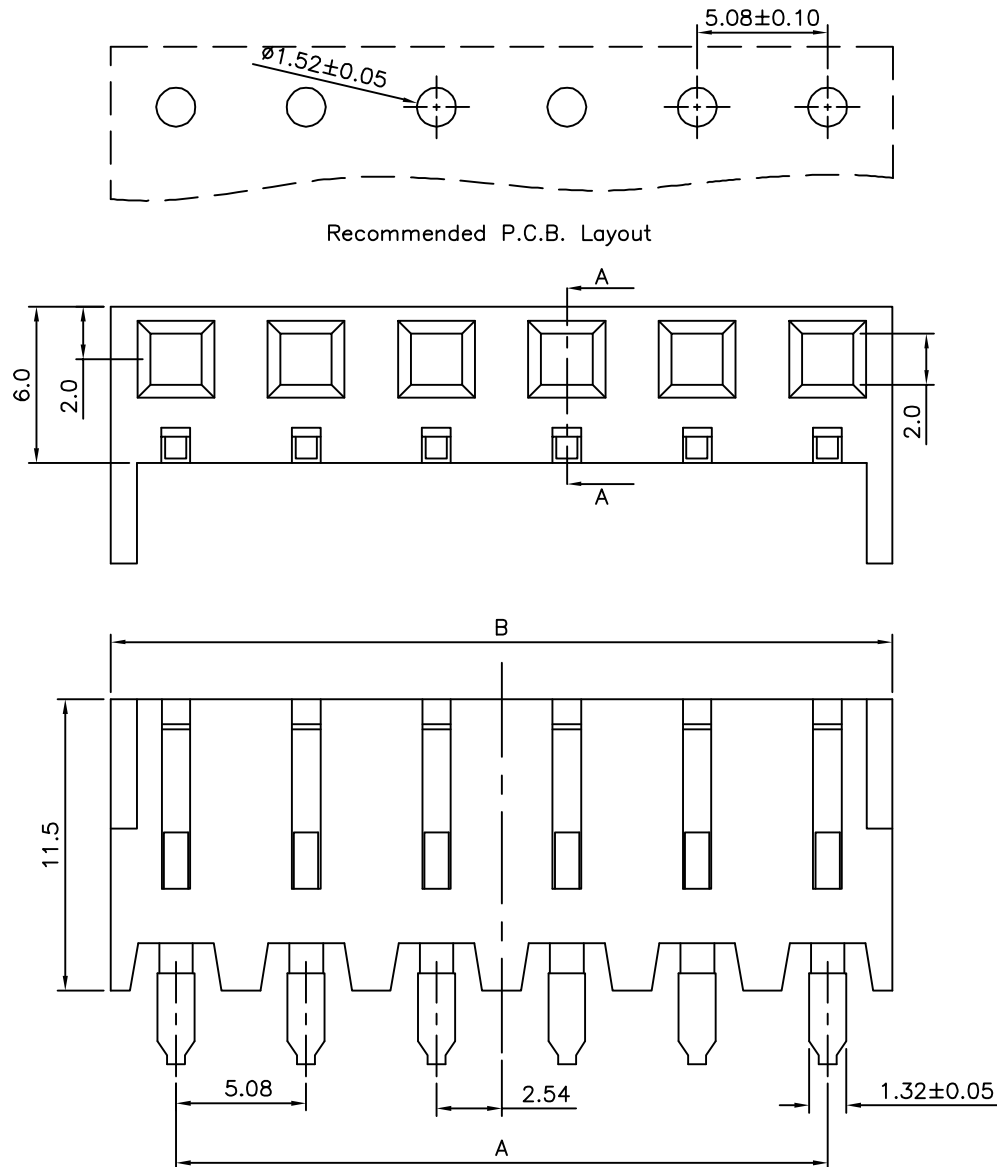

Section A-A

△ Pin	A	B
02	5.08±0.10	10.16±0.15
03	10.16±0.10	15.24±0.15
04	15.24±0.10	20.32±0.15
05	20.32±0.10	25.40±0.15
06	25.40±0.10	30.48±0.20
07	30.48±0.20	35.56±0.20
08	35.56±0.20	40.64±0.20
09	40.64±0.20	45.72±0.20
10	45.72±0.20	50.80±0.25
11	50.80±0.20	55.88±0.25
12	55.88±0.25	60.96±0.25

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14950

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△.X ±0.30 X.* ±1*

.XX ±0.20 .X.* ±0.5*

.XXX ±0.10 .XX.* ±0.25*

UNIT mm



△ A3

Modify Data

HZF

05/20/2015

△ A2

Modify Data

HZF

07/03/2013

△ A1

Modify Data

HZF

03/27/2009

△ A0

NEW RELEASE

BECKY

2004/06/07

NO. REV.

REVISIONS

CHK

DATE