

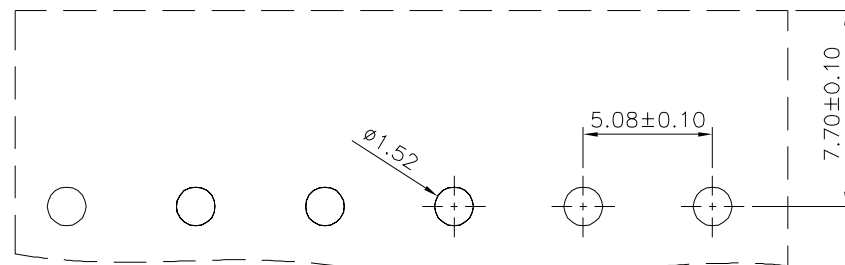


3.1 SPECIFICATION

Current:7.0A Max.
Voltage:250V Max.
Withstanding Voltage:1500V
Insulation Resistance:500K Megaohms Min.
Temperature Range:-40°C~+105°C
Housing:PA66(UL94V-2),White
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

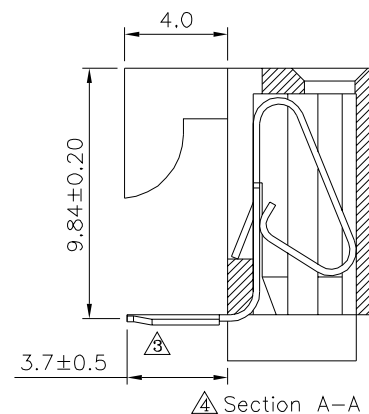

Recommended P.C.B. Layout

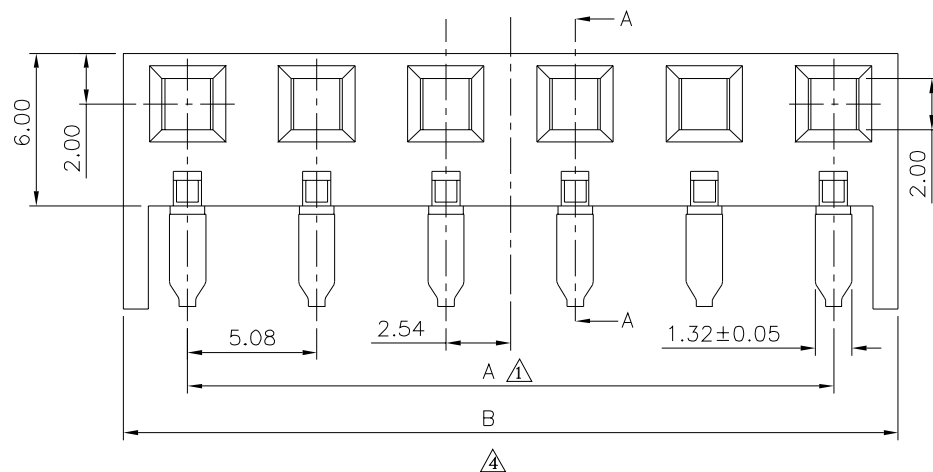

Section A-A

4.2.3

Pin	A	B
02	5.08±0.10	10.16 ^{+0.05} _{-0.20}
03	10.16±0.10	15.24 ^{+0.05} _{-0.20}
04	15.24±0.10	20.32 ^{+0.10} _{-0.25}
05	20.32±0.10	25.40 ^{+0.10} _{-0.25}
06	25.40±0.10	30.48 ^{+0.10} _{-0.25}
07	30.48±0.20	35.56 ^{+0.10} _{-0.25}
08	35.56±0.20	40.64 ^{+0.20} _{-0.40}
09	40.64±0.20	45.72 ^{+0.20} _{-0.40}
10	45.72±0.20	50.80 ^{+0.20} _{-0.45}
11	50.80±0.20	55.88 ^{+0.20} _{-0.45}
12	55.88±0.25	60.96 ^{+0.50} _{-0.75}
13	60.96±0.25	66.04 ^{+0.50} _{-0.75}
14	66.04±0.25	71.12 ^{+0.50} _{-0.75}
15	71.12±0.25	76.20 ^{+0.50} _{-0.75}
16	76.20±0.25	81.28 ^{+0.50} _{-0.75}
17	81.28±0.30	86.36 ^{+0.50} _{-0.75}
18	86.36±0.30	91.44 ^{+0.50} _{-0.75}
19	91.44±0.30	96.52 ^{+0.50} _{-0.75}
20	96.52±0.30	101.60 ^{+0.50} _{-0.75}

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14968

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△.X ±0.30 X.* ±1*
.XX ±0.20 .X.* ±0.5*
.XXX ±0.10 .XX.* ±0.25*

UNIT
mm



△A4

Modify Data

HZF

03/16/2023

△A3

Modify Data

HZF

05/20/2015

△A2

Modify Data

HZF

07/03/2013

△A1

Modify Data

HZF

03/27/2009

△A0

NEW RELEASE

BECKY

2004/06/07

NO. REV.

REVISIONS

CHK

DATE