
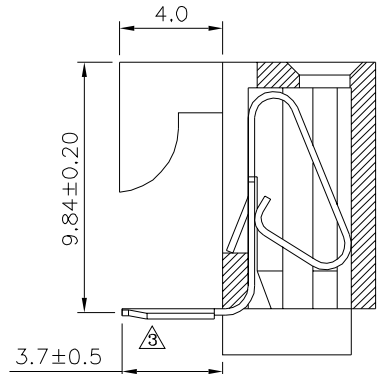
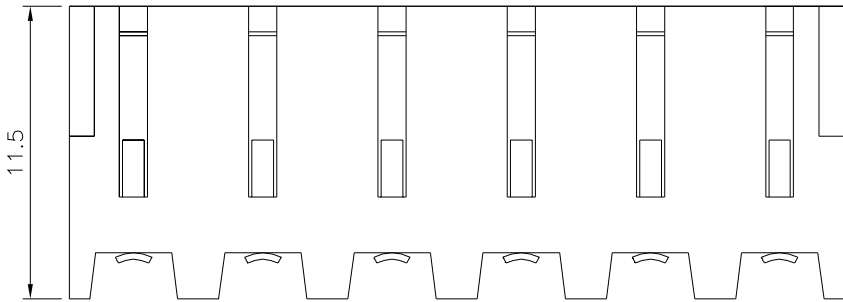


Recommended P.C.B. Layout

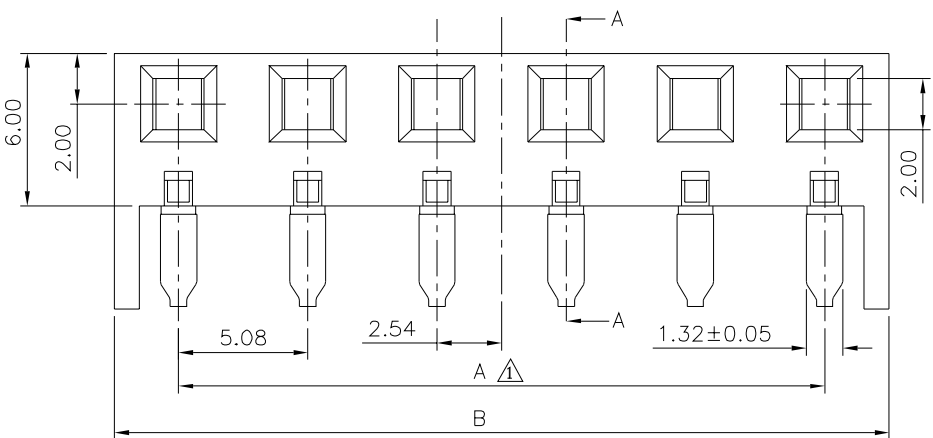

Section A-A

3 SPECIFICATION

- Current:7.0A Max.
- Voltage:250V Max.
- Withstanding Voltage:1500V
- Insulation Resistance:500K Megaohms Min.
- Temperature Range:-40°C~+105°C
- Housing:PA66(UL94V-2),White
- Contact:Brass,Tin Plated Over Nickel
- RoHS Compliant

4 Pin

Pin	A	B
02	5.08±0.10	10.16±0.05
03	10.16±0.10	15.24±0.05
04	15.24±0.10	20.32±0.10
05	20.32±0.10	25.40±0.10
06	25.40±0.10	30.48±0.10
07	30.48±0.20	35.56±0.10
08	35.56±0.20	40.64±0.20
09	40.64±0.20	45.72±0.40
10	45.72±0.20	50.80±0.45
11	50.80±0.20	55.88±0.20
12	55.88±0.25	60.96±0.50
13	60.96±0.25	66.04±0.75
14	66.04±0.25	71.12±0.75
15	71.12±0.25	76.20±0.50
16	76.20±0.25	81.28±0.50
17	81.28±0.30	86.36±0.75
18	86.36±0.30	91.44±0.50
19	91.44±0.30	96.52±0.50
20	96.52±0.30	101.60±0.75