

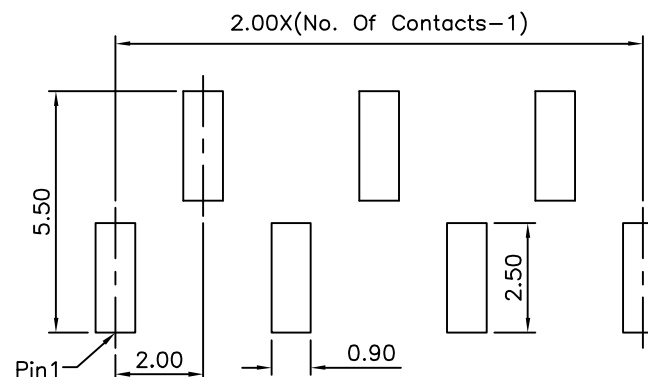
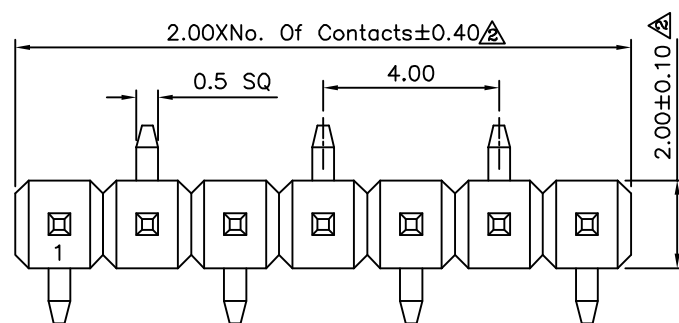


# △△ SPECIFICATION

Current:1A  
 Dielectric Strength:1000V AC Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash Over Nickel  
 No. Of Contacts:2~40 Contacts  
 RoHS Compliant

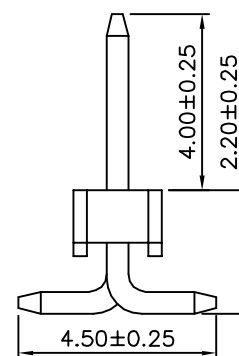

△ Recommended P.C.B. Layout

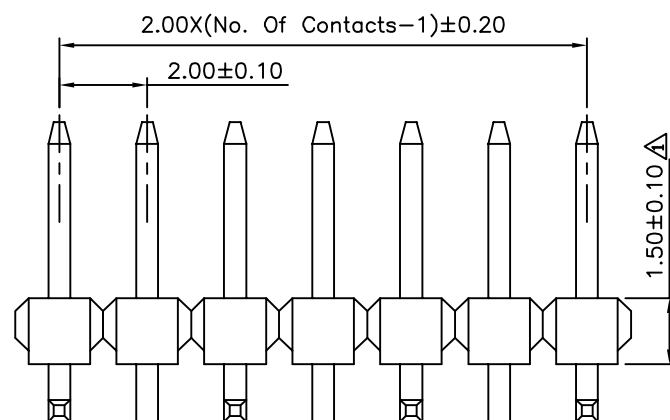

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15007

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK  | DATE       |
|-----|------|-------------|------|------------|
| △   | A3   | Modify Data | HZF  | 01/14/2014 |
| △   | A2   | Modify Data | HZF  | 12/18/2012 |
| △   | A1   | Modify Data | HZF  | 09/03/2009 |
| △   | A0   | NEW RELEASE | SHIN | 04/15/2007 |