

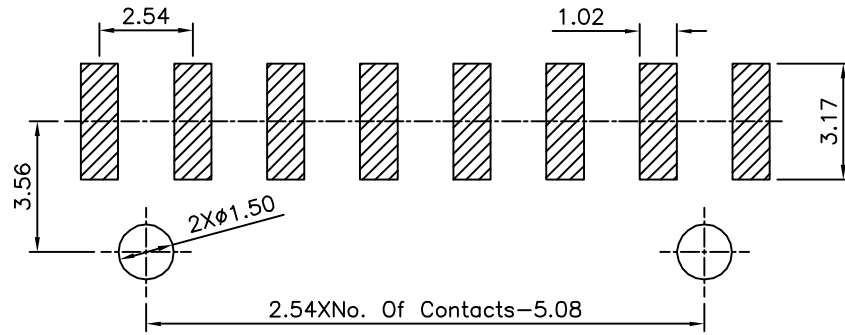


SPECIFICATION



Current Rating:3A
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

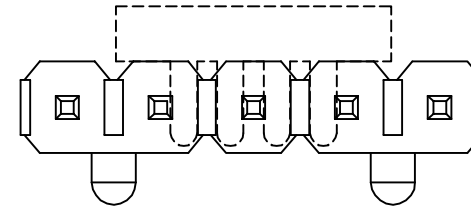

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

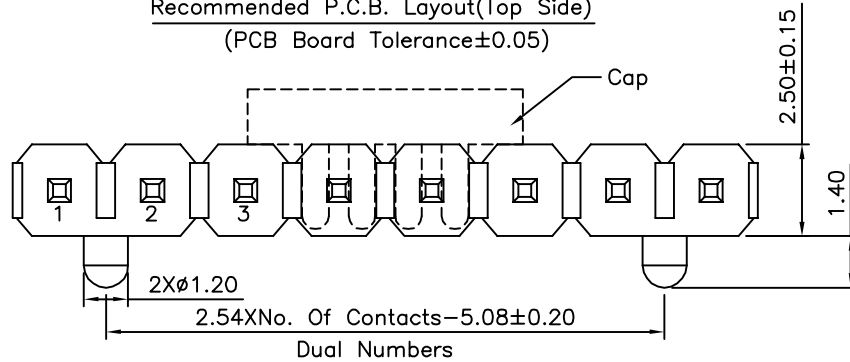

Odd Number

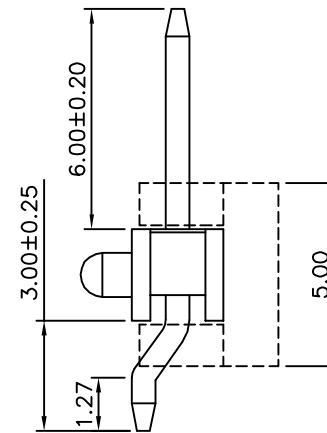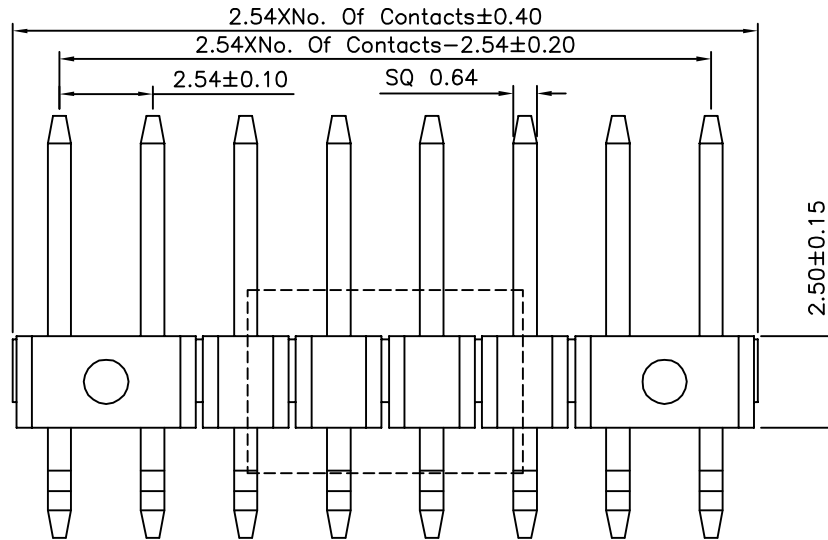

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15069

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

06/17/2014