

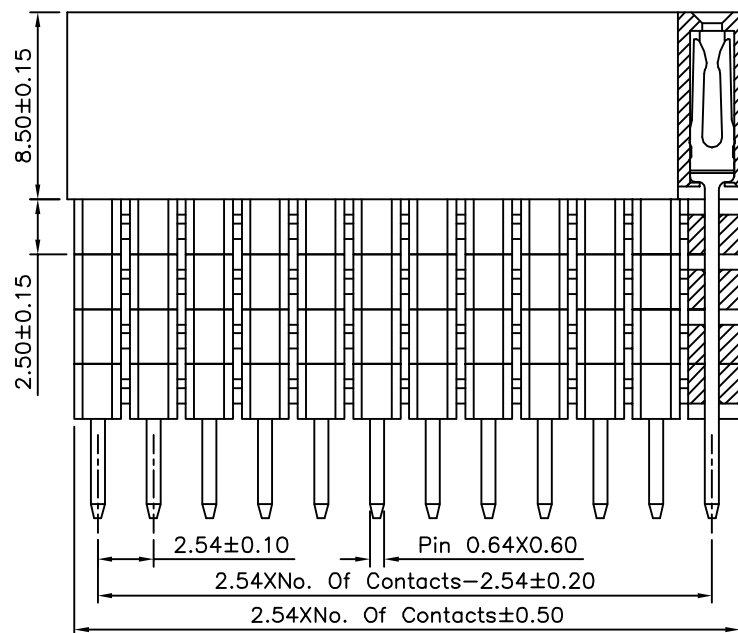
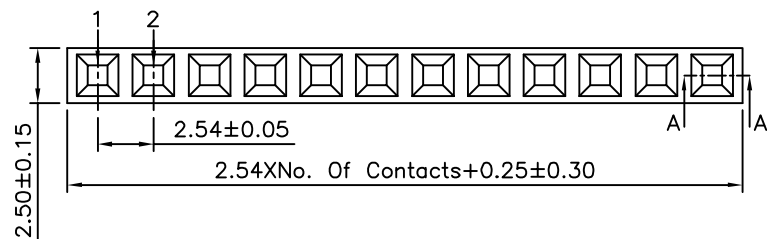


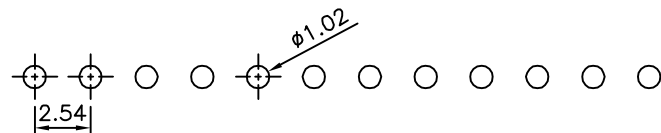

Section A-A

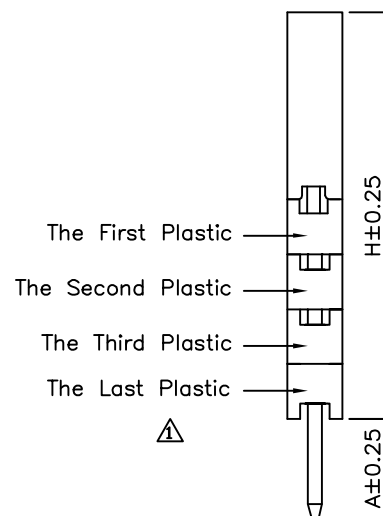

# SPECIFICATION

Current Rating:3.0 Amp  
 Withstand Voltage:1000V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

| Series No. | Plastic Q'ty | H     | A    |
|------------|--------------|-------|------|
| 0196       | 1            | 11.05 | 2.30 |
| 0196       | 1            | 11.05 | 7.35 |
| 0196       | 1            | 11.05 | 12.2 |
| 0197       | 2            | 13.59 | 4.85 |
| 0197       | 2            | 13.59 | 9.65 |
| 0198       | 3            | 16.13 | 2.30 |
| 0198       | 3            | 16.13 | 7.10 |
| 0199       | 4            | 18.67 | 4.60 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

15229

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

B1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X  $\pm 0.40$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.15$   
ANG.  $\pm 3^\circ$

UNIT  
mm



NO.

REV.

REVISIONS

CHK

DATE

B1 Modify Data

B0 NEW RELEASE

DATE

HZF

HZF

DATE

10/22/2012

05/23/2012