


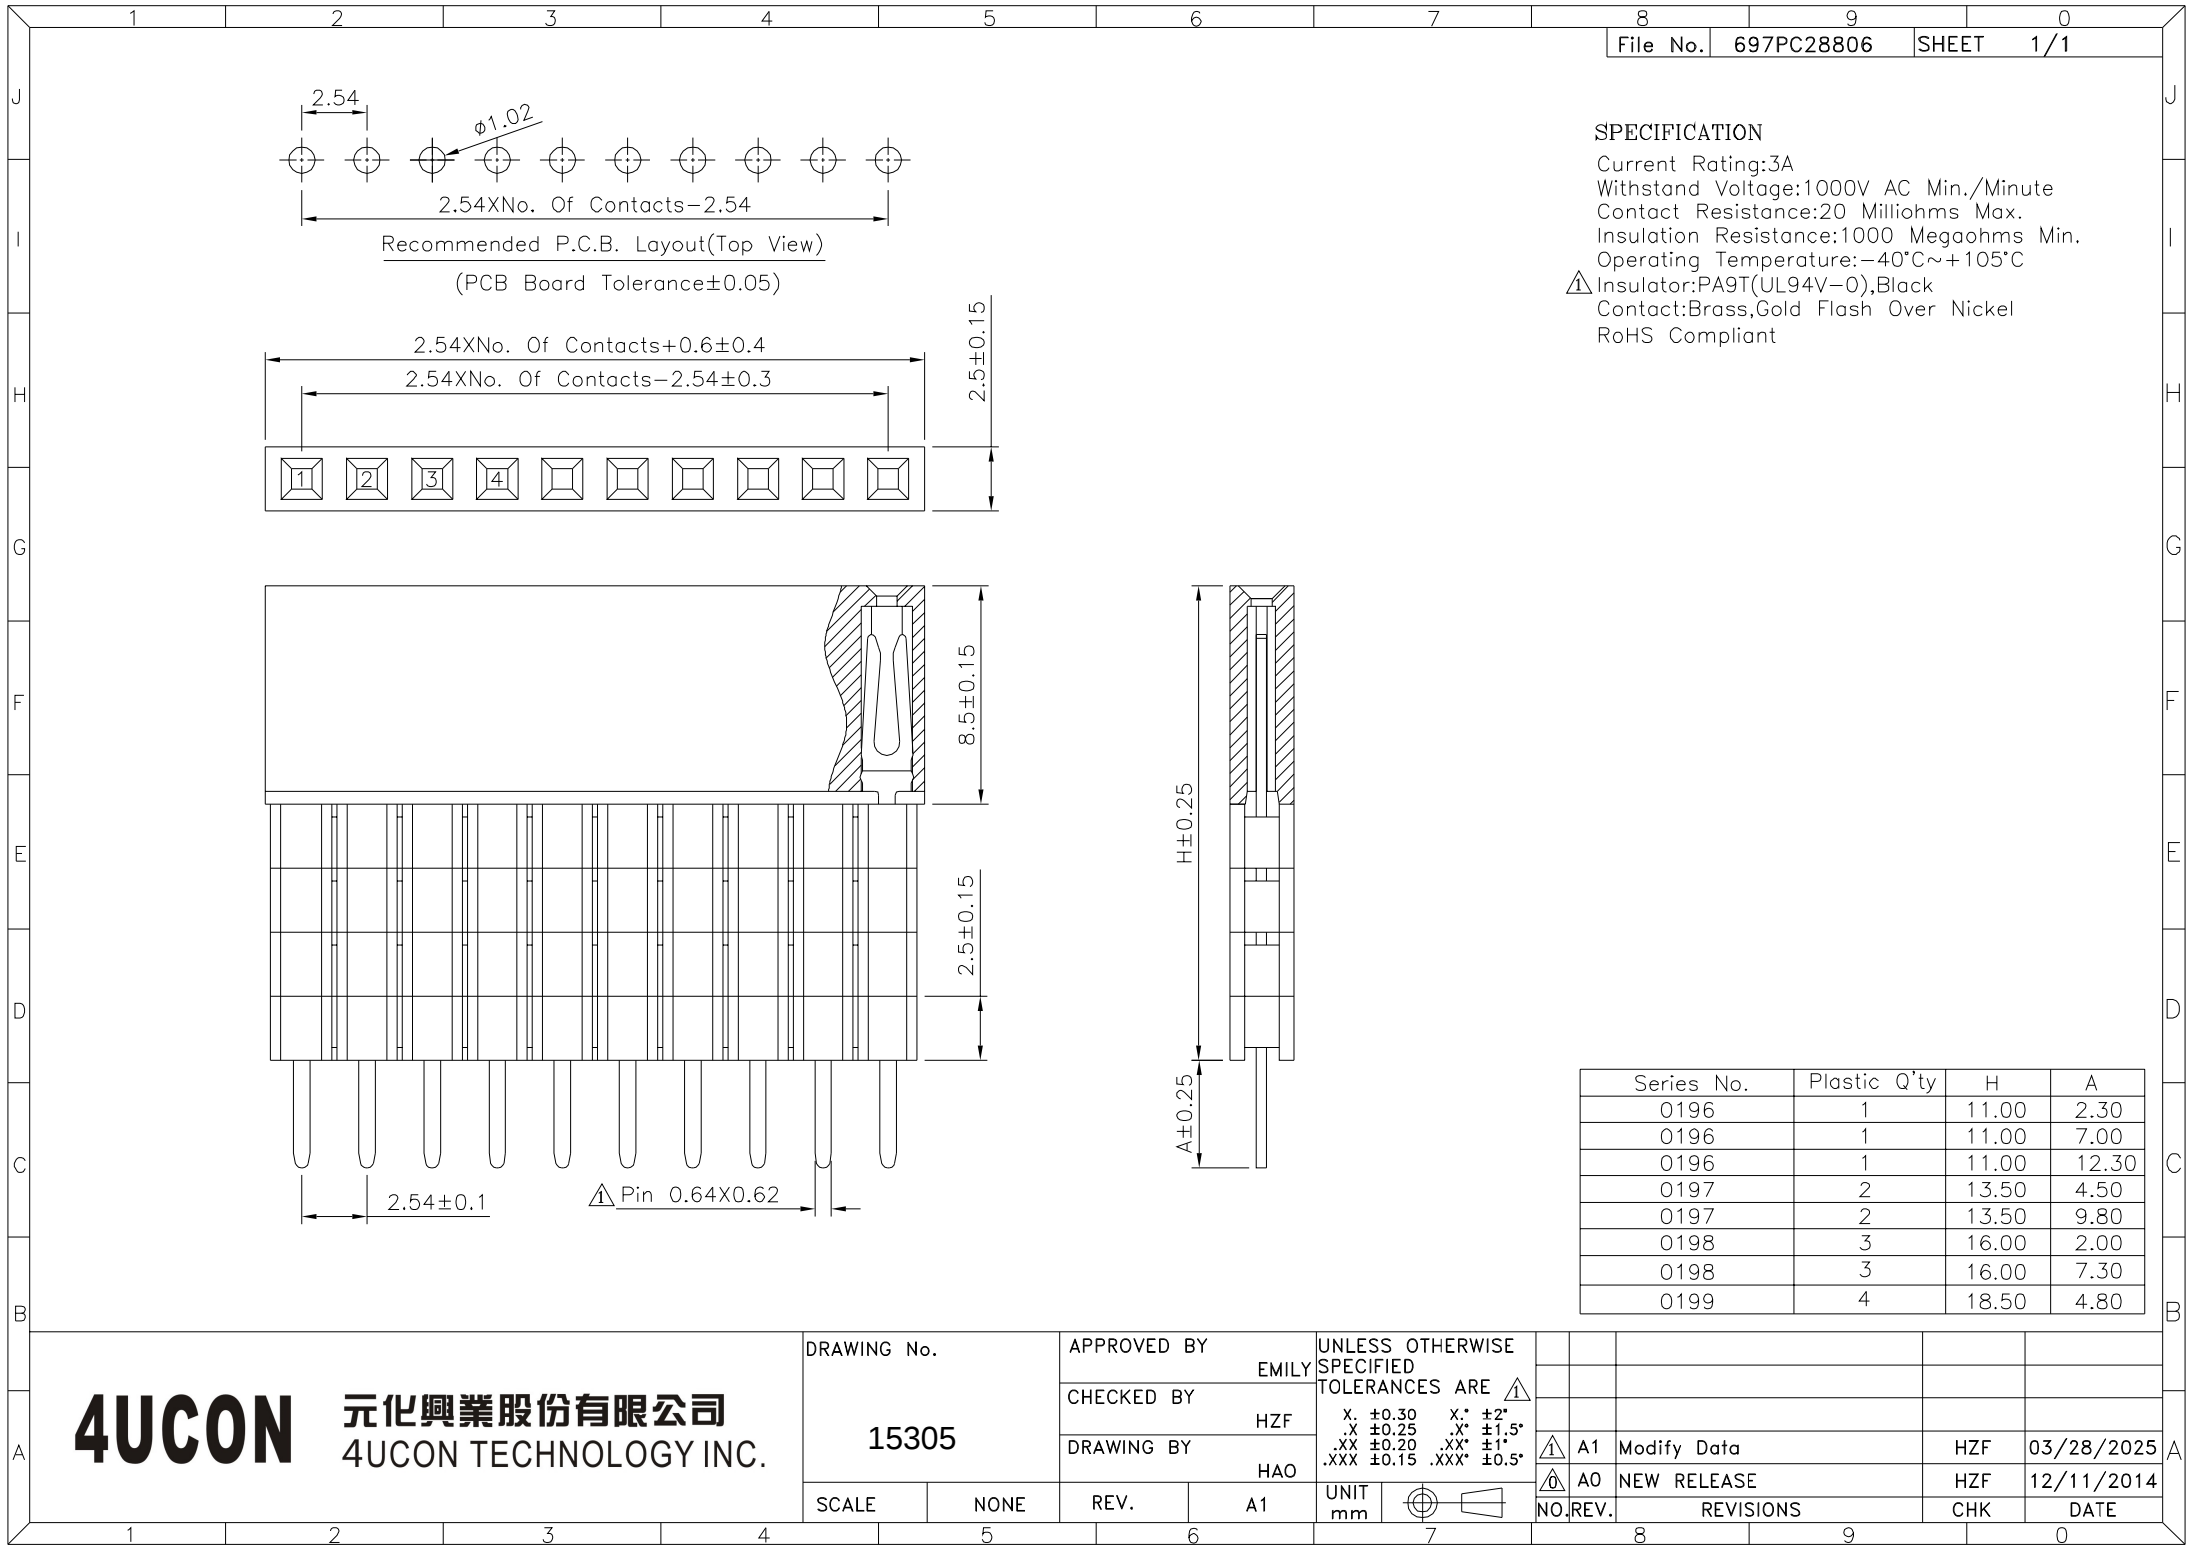

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-O),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 15305		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY HAO	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠									
⚠	A1	Modify Data						HZF	03/28/2025
⚠	A0	NEW RELEASE						HZF	12/11/2014
NO.	REV.	REVISIONS						CHK	DATE