

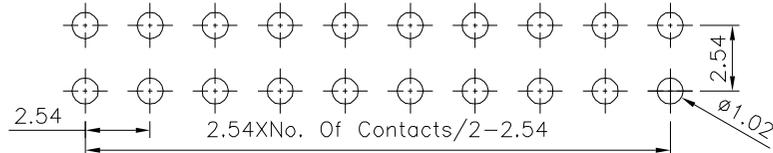
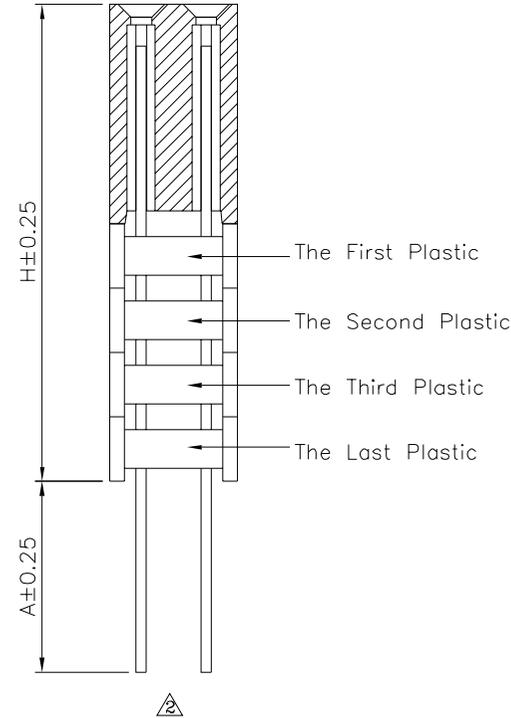


**SPECIFICATION**

Current Rating:3A  
 ⚠ Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 ⚠ Insulator:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

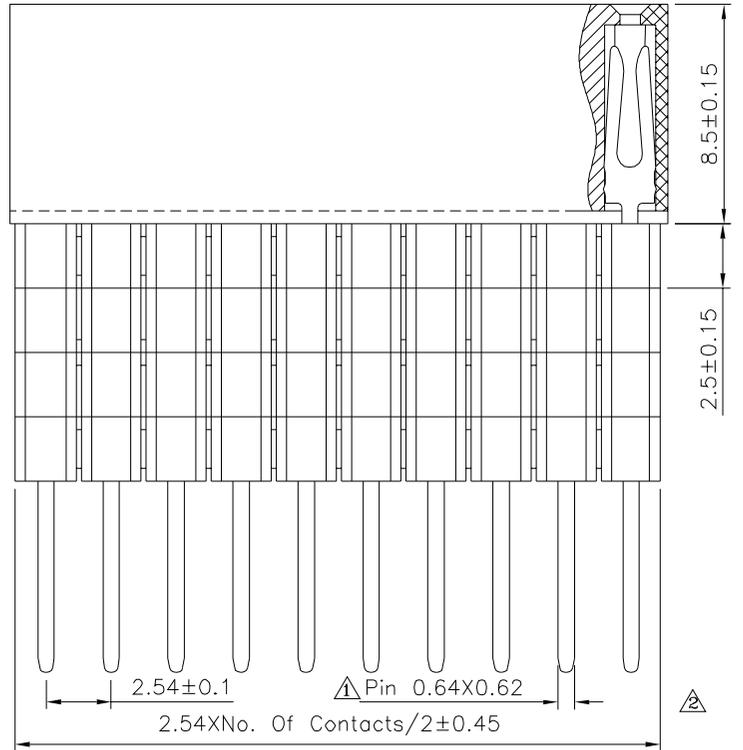

Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

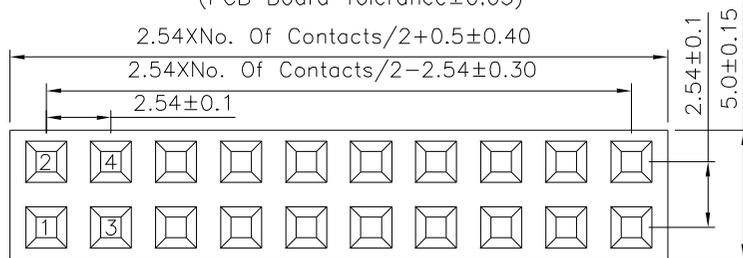

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

15364

APPROVED BY  
 EMILY

CHECKED BY  
 HZF

DRAWING BY  
 HAO

SCALE NONE

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .x ±0.30 .x' ±2"  
 .xx ±0.25 .xx' ±1.5"  
 .xxx ±0.20 .xxx' ±1.0"  
 .xxx ±0.15 .xxx' ±0.5"

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	01/26/2024
A1		Modify Data	HZF	12/20/2023
A0		NEW RELEASE	HZF	05/03/2014