
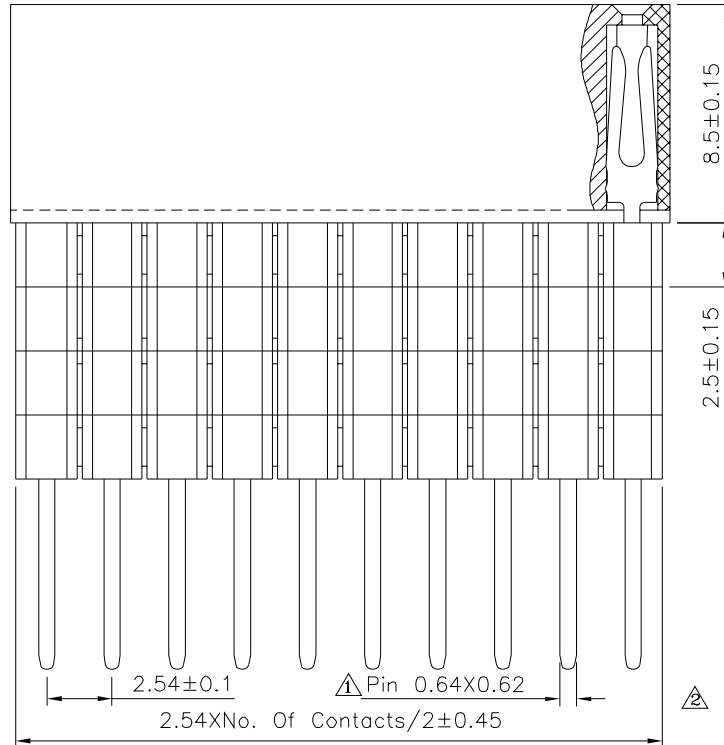


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

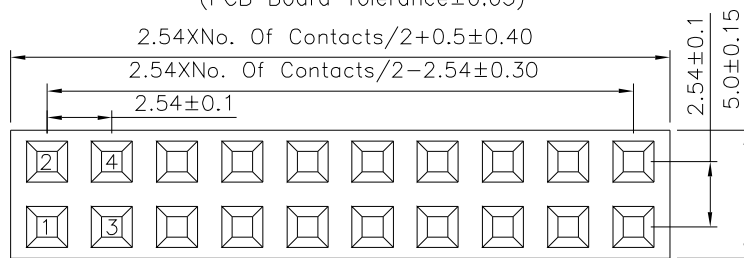


SPECIFICATION

Current Rating:3A

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C

- Insulator:PA9T(UL94V-O),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

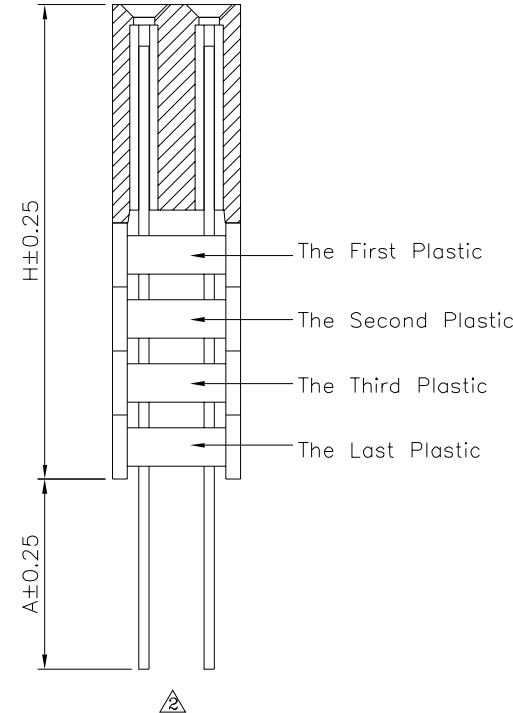

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15366

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.30 X. $\pm 2^\circ$
.XX ± 0.25 .X. $\pm 1.5^\circ$
.XXX ± 0.20 .XXX $\pm 1.0^\circ$
.XXX ± 0.15 .XXX $\pm 0.5^\circ$

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	01/26/2024
A1		Modify Data	HZF	12/20/2023
A0		NEW RELEASE	HZF	05/03/2014