


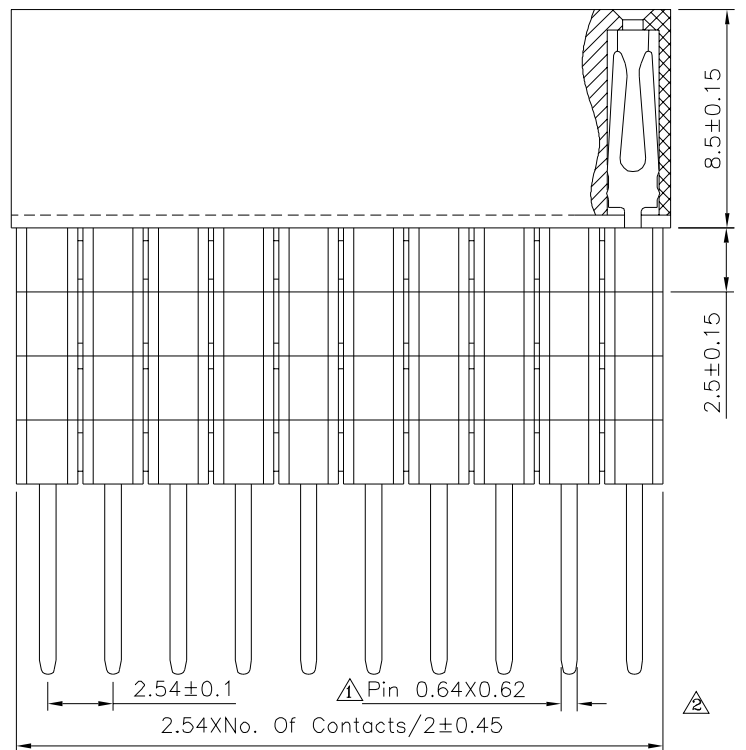


File No.	6970A26806	SHEET	1/1
----------	------------	-------	-----

SPECIFICATION

Current Rating:3A

⚠ Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

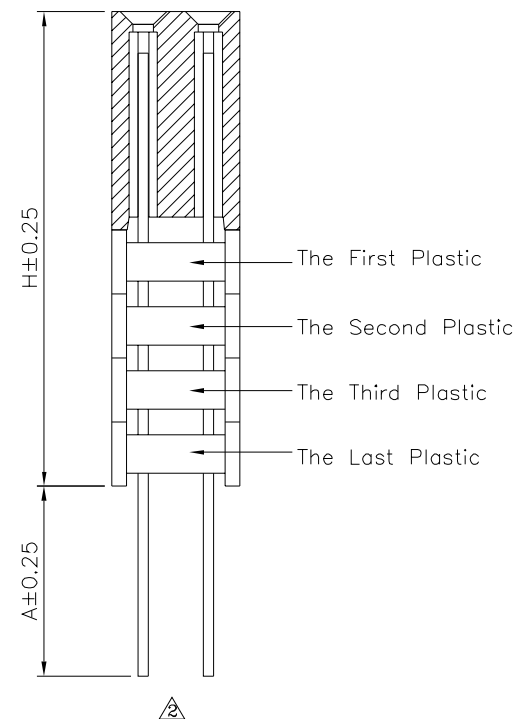

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

15403

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle 2$	$X. \pm 0.30$	$X.^* \pm 2^*$
	$.X \pm 0.25$	$.X^* \pm 1.5^*$
	$.XX \pm 0.20$	$.XX^* \pm 1.0^*$
	$.XXX \pm 0.15$	$.XXX^* \pm 0.5^*$

UNIT
12.12

--	--	--

Δ	1.0

1	A1
---	----

	$\triangle$	Δ
--	-------------	----------

--	--

Modify Data

NEW RELEASE

SE

--	--

[illegible]

HZF

H7F

--	--

--	--

12/20/2023

05/03/2014