

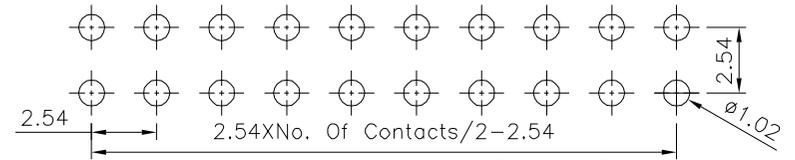
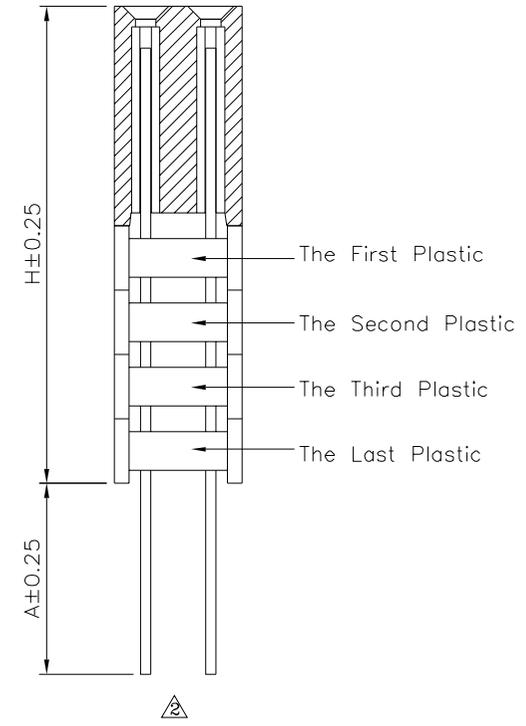


**SPECIFICATION**

Current Rating:3A  
 ⚠ Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Operating Temperature:-40°C~+105°C  
 ⚠ Insulator:PA9T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

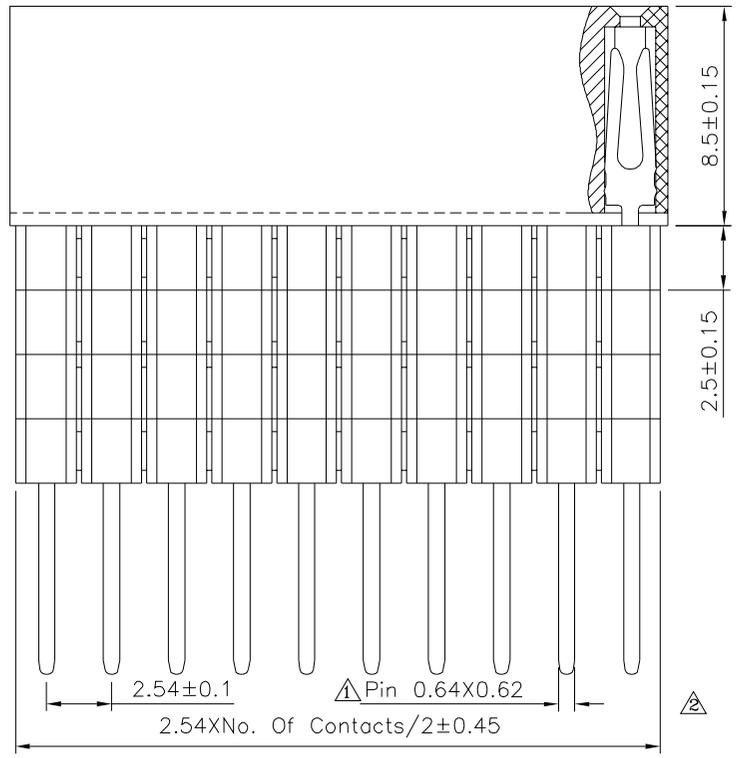

Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

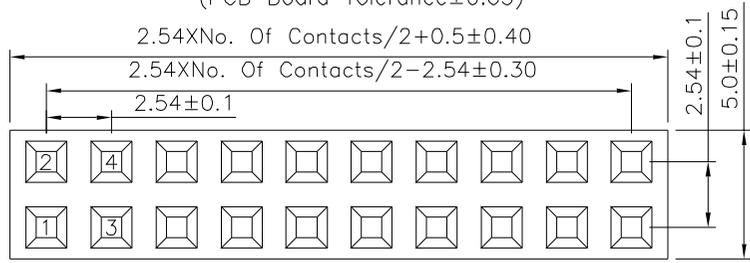

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
**15458**

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .x ±0.30    .x. ±2°  
 .xx ±0.25    .xx. ±1.5°  
 .xxx ±0.20    .xxx. ±1.0°  
 .xxx ±0.15    .xxx. ±0.5°

NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	01/26/2024
⚠	A1	Modify Data	HZF	12/20/2023
⚠	A0	NEW RELEASE	HZF	05/03/2014

SCALE NONE REV. A2

