


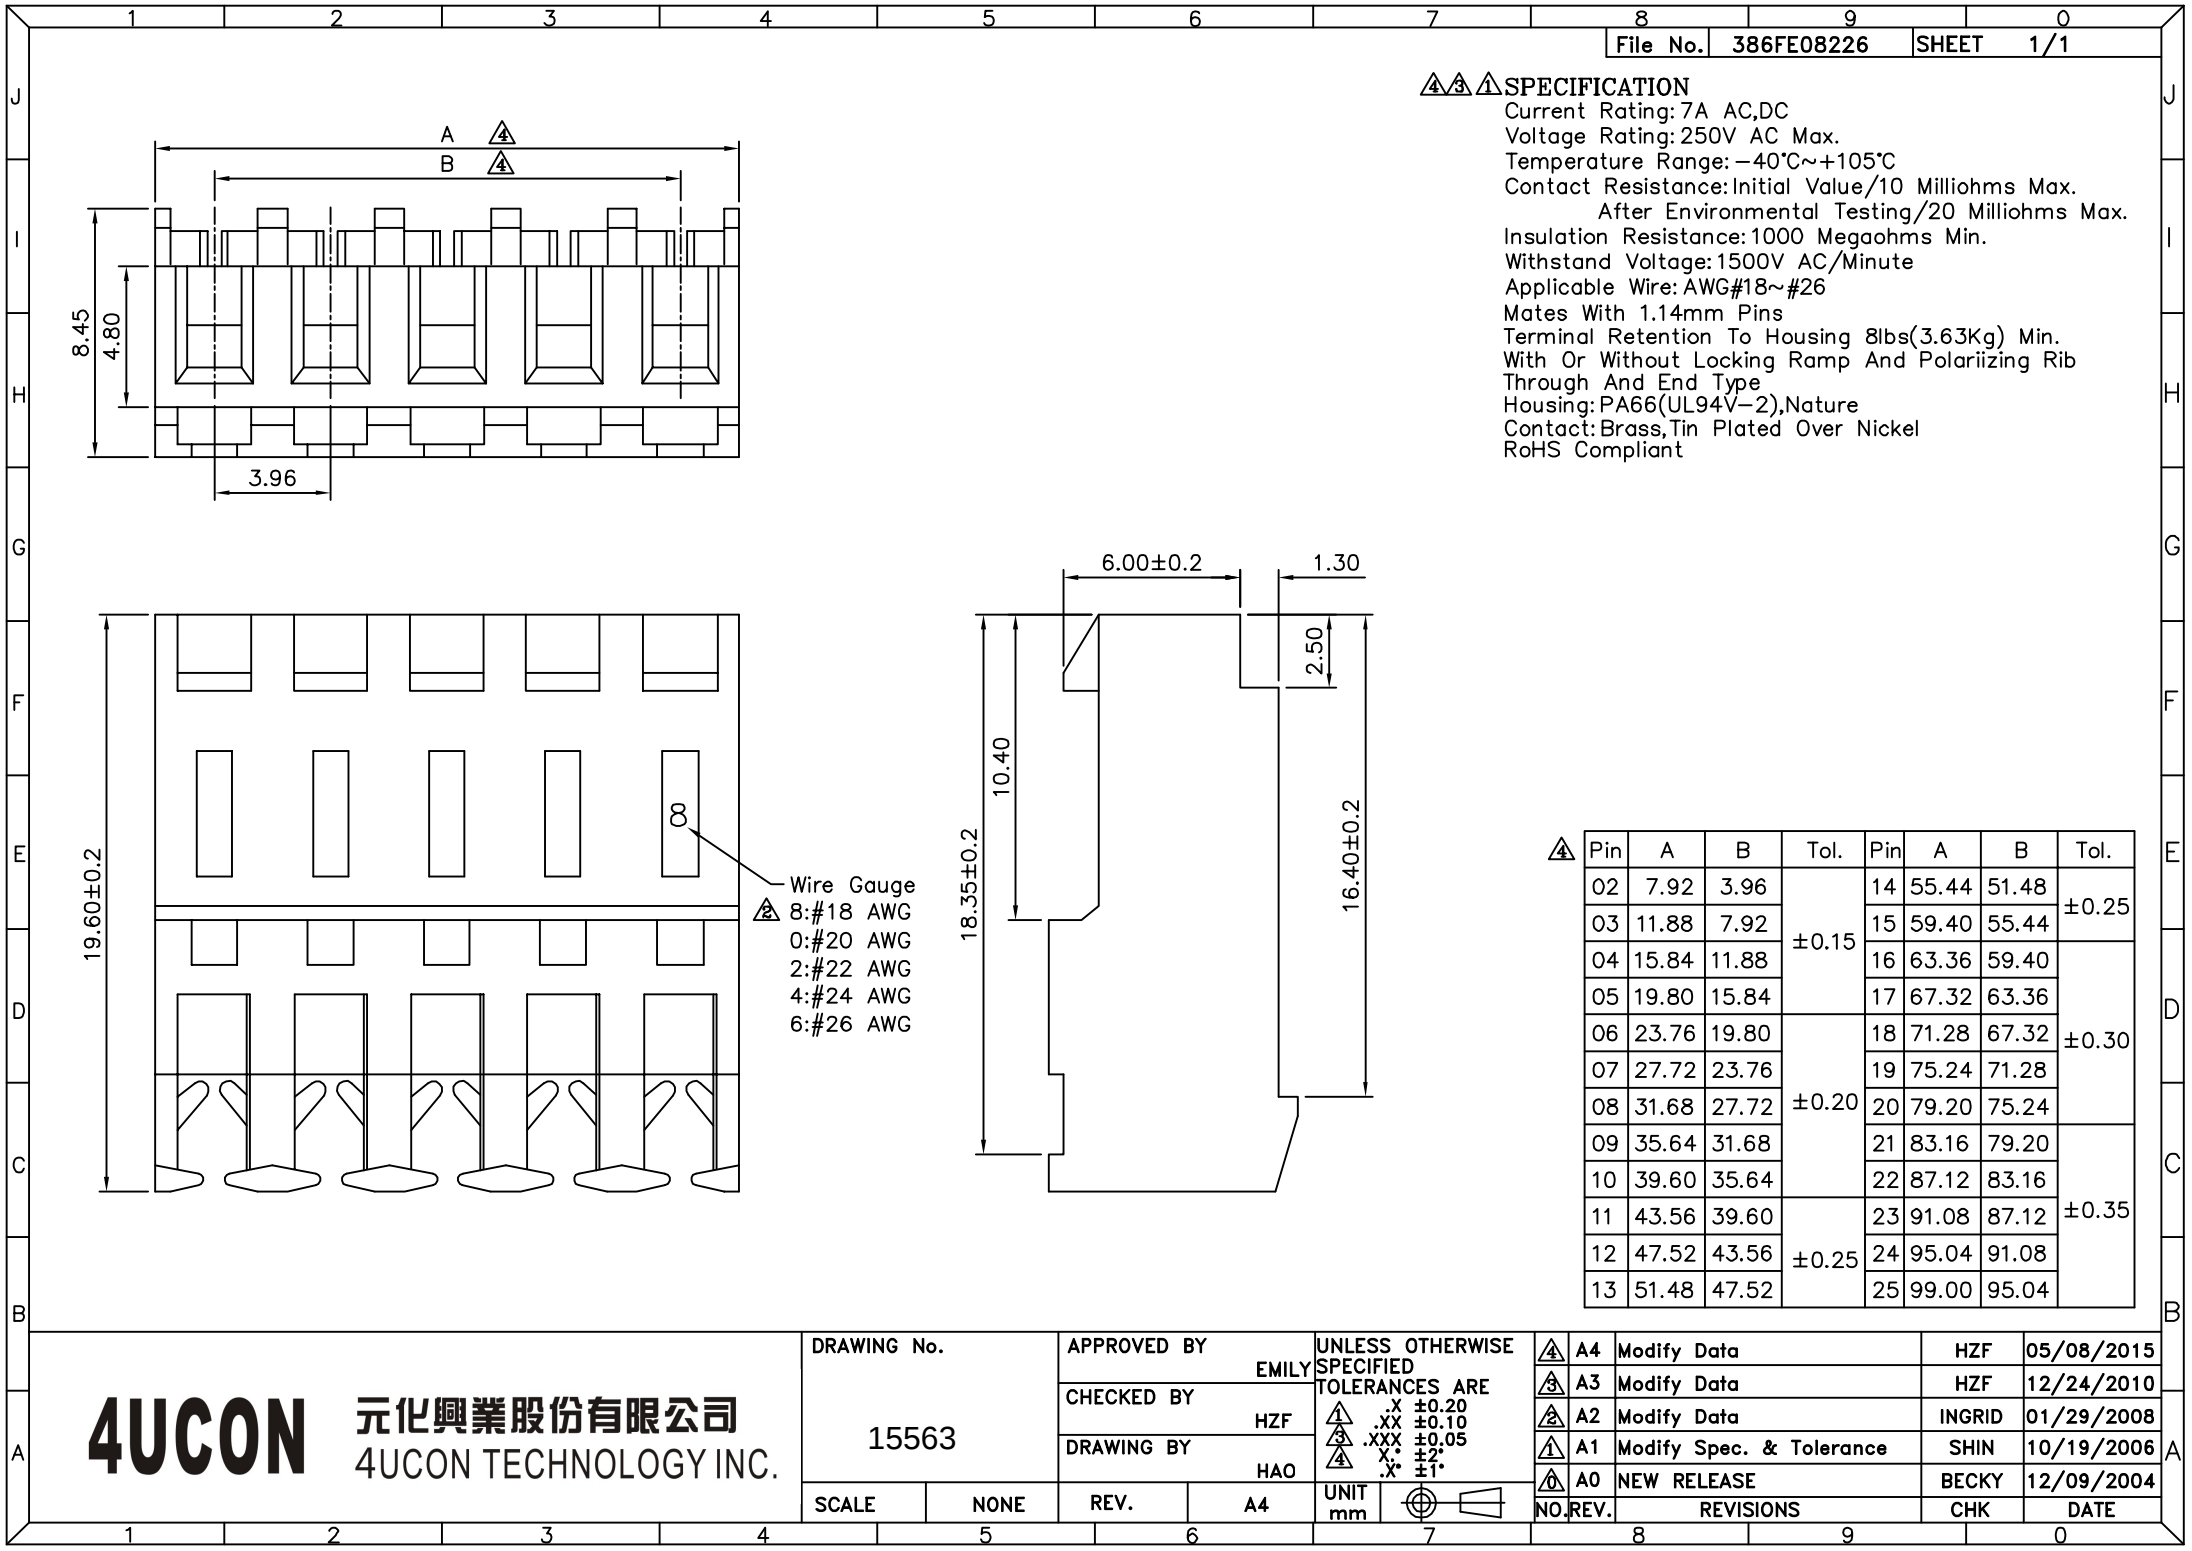

△△△ SPECIFICATION
Current Rating: 7A AC,DC
Voltage Rating: 250V AC Max.
Temperature Range: -40°C~+105°C
Contact Resistance: Initial Value/10 Milliohms Max.
After Environmental Testing/20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstand Voltage: 1500V AC/Minute
Applicable Wire: AWG#18~#26
Mates With 1.14mm Pins
Terminal Retention To Housing 8lbs(3.63Kg) Min.
With Or Without Locking Ramp And Polariizing Rib
Through And End Type
Housing: PA66(UL94V-2),Nature
Contact: Brass, Tin Plated Over Nickel
RoHS Compliant

Wire Gauge
8: #18 AWG
0: #20 AWG
2: #22 AWG
4: #24 AWG
6: #26 AWG

△	Pin	A	B	Tol.	Pin	A	B	Tol.
	02	7.92	3.96	±0.15	14	55.44	51.48	±0.25
	03	11.88	7.92		15	59.40	55.44	
	04	15.84	11.88		16	63.36	59.40	±0.30
	05	19.80	15.84	±0.20	17	67.32	63.36	
	06	23.76	19.80		18	71.28	67.32	
	07	27.72	23.76	±0.25	19	75.24	71.28	±0.35
	08	31.68	27.72		20	79.20	75.24	
	09	35.64	31.68		21	83.16	79.20	
	10	39.60	35.64	±0.25	22	87.12	83.16	±0.35
	11	43.56	39.60		23	91.08	87.12	
	12	47.52	43.56		24	95.04	91.08	
	13	51.48	47.52		25	99.00	95.04	

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 15563		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.20 △ .XX ±0.10 △ .XXX ±0.05 △ .X° ±2° △ .X° ±1°	
		EMILY			
		CHECKED BY			
		HZF			
		DRAWING BY			
		HAO			
SCALE	NONE	REV.	A4	UNIT mm	

△	A4	Modify Data	HZF	05/08/2015
△	A3	Modify Data	HZF	12/24/2010
△	A2	Modify Data	INGRID	01/29/2008
△	A1	Modify Spec. & Tolerance	SHIN	10/19/2006
△	A0	NEW RELEASE	BECKY	12/09/2004
NO.	REV.	REVISIONS	CHK	DATE