


P.C.B LAYOUT(Tolerance: ±0.05mm)

Specification

1. General Information
 - . Contact Principle: Friction Technology
 - . Mounting Type: SMT
 - . Durability: 10,000 Cycles Min.
 - . Material:
 - . Data Contact: Copper Alloy
 - . Insulator :Thermoplastic, UL 94V-0
 - . Shell: Brass, Nickel Plated
 - ⚠ Plating: Gold Over Nickel
2. Electrical Specification
 - . Contact Resistance: 50 Milliohms Max.
 - . Insulation Resistance: 1000 Megohms Min.
3. Environmental Specification
 - . Operating Temperature: -40°C ~ +85°C
 - . Humidity: 10% ~ 95% RH
 - . Storage Temperature: -40°C ~ +85°C
 - . Storage Humidity: 10% ~ 95% RH
 - . Resistance To Soldering Heat:
 - Vapor Phase: 215°C, 30 Sec. Max.
 - IR Re-Flow: 260°C, 15 Sec. Max.
 - Manual Soldering: 360°C, 3 Sec. Max.
 - . RoHS Compliant



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15727

SCALE NONE

APPROVED BY VIVIAN

CHECKED BY LYS

DRAWING BY LX

REV. A3

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±1°

UNIT mm







NO.	REV.	REVISIONS	CHK	DATE
⚠	A3	Modify Data	LX	11/19/2013
⚠	A2	Modify Data	LX	10/29/2013
⚠	A1	Modify Data	SJH	07/22/2013
⚠	A0	NEW RELEASE	XSH	07/18/2007

SPECIFICATIONS:

Reel Size: 330*32.5 mm

QTY: 625Pcs/Reel

RoHS Compliant

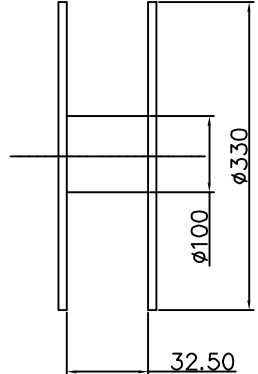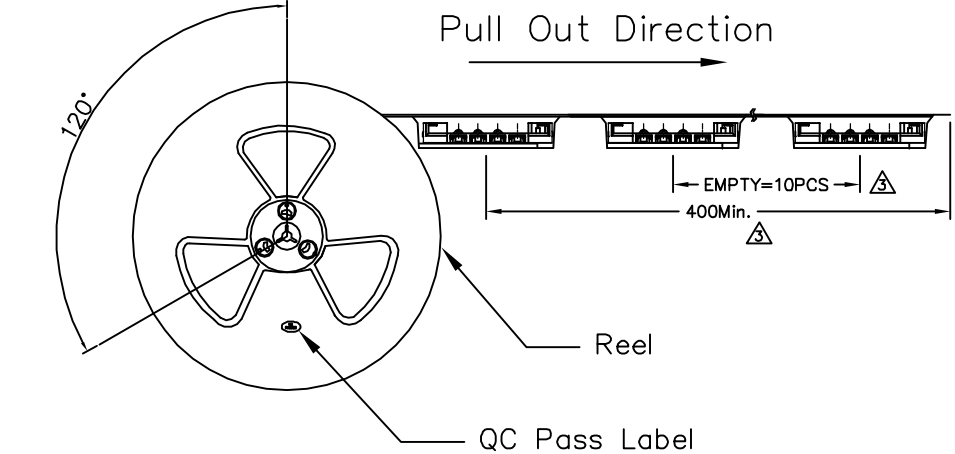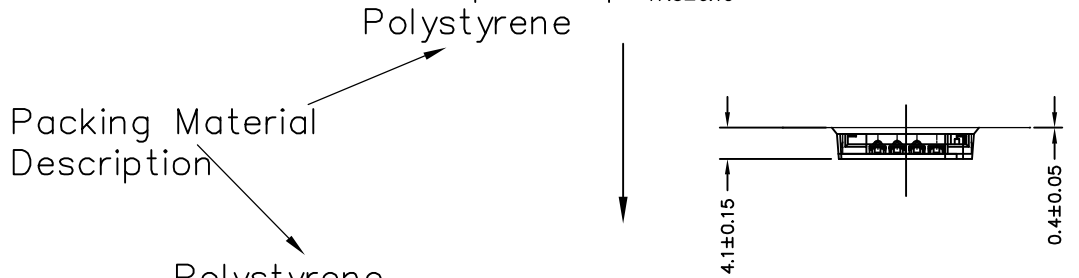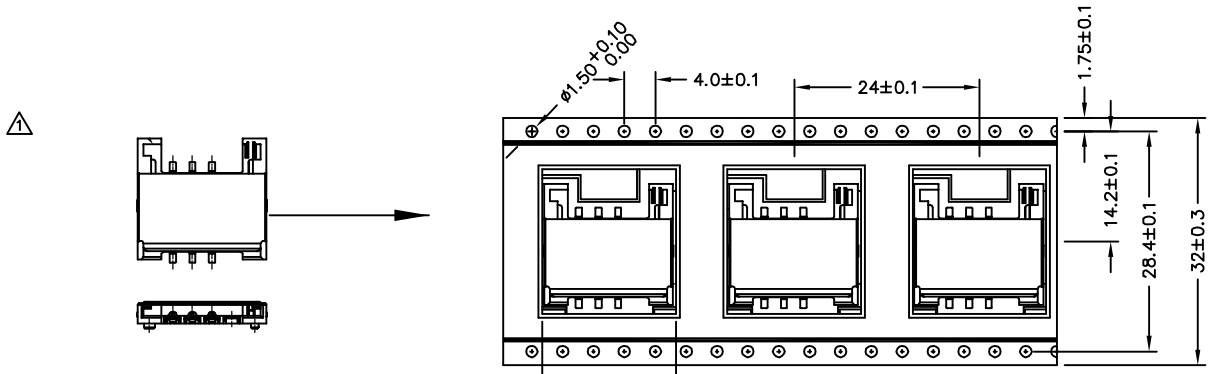

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±1°	
15727		VIVIAN			
		LYS			
		DRAWING BY		UNIT	
SCALE		REV.		mm	
NONE		A3			

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	LX	11/19/2013
△A2		Modify Data	LX	10/29/2013
△A1		Modify Data	SJH	07/22/2013
△A0		NEW RELEASE	XSH	07/18/2007