

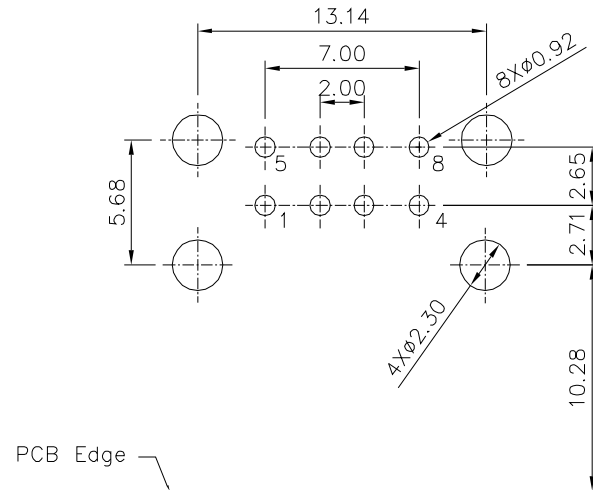
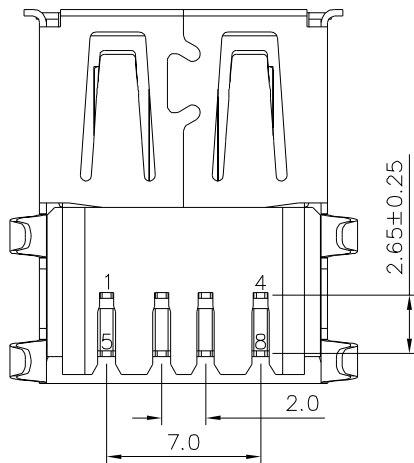
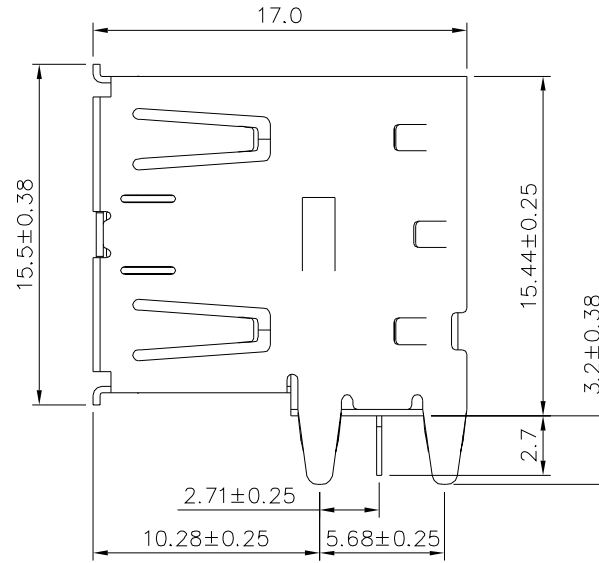


SPECIFICATION

Current Rating:1.5A
Voltage:30V Max.
Withstand Voltage:500V AC For 1 Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:30 Milliohms Max.
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.
RoHS Compliant

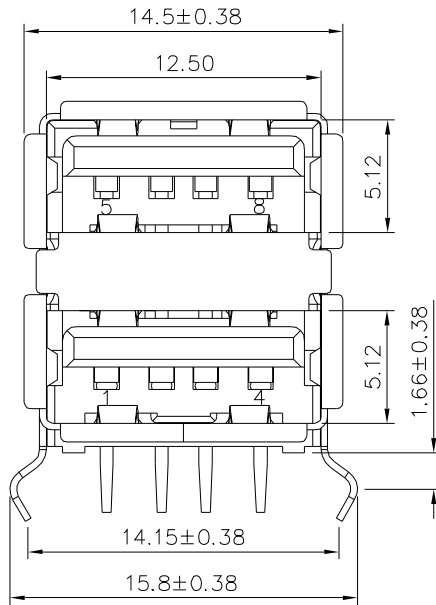

Recommended P.C.B. Layout(Top View)
PCB Thickness:1.20±0.05,Tolerance±0.05

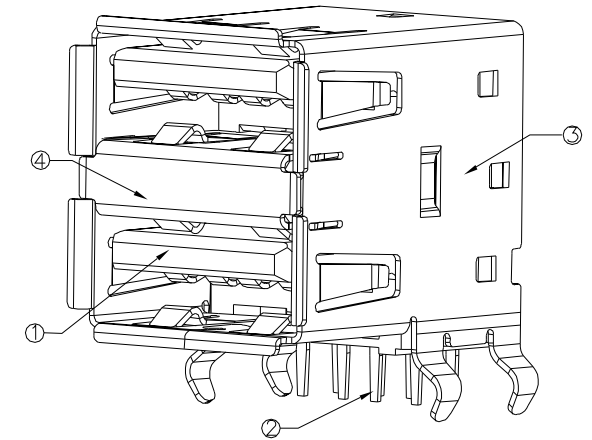

No.	Description	Material	Remark
①	Housing	PBT	White
②	Terminal	Phosphor Bronze	Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
③	Shell	Brass	Nickel Plated
④	Spring	Brass	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15764

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


.X ±0.25

.XX ±0.15

.XXX ±0.075

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

△ A0 NEW RELEASE

HZF

09/11/2023

NO.

REV.

REVISIONS

CHK

DATE