

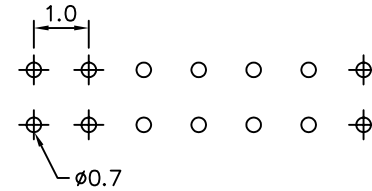
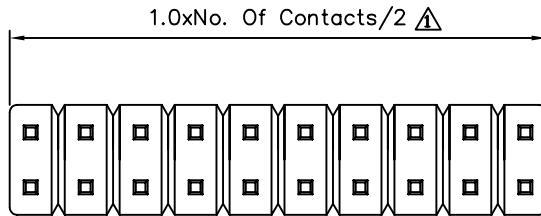


SPECIFICATIONS

Current Rating: 1 Amp
 Withstanding Voltage: AC 500V RMS
 Insulation Resistance: 5000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operation Temperature: -40°C To +105°C
 Insulator: Thermoplastic UL 94V-0
 Contact: Copper Alloy

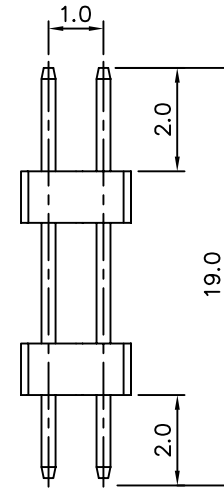

P.C.B. Layout

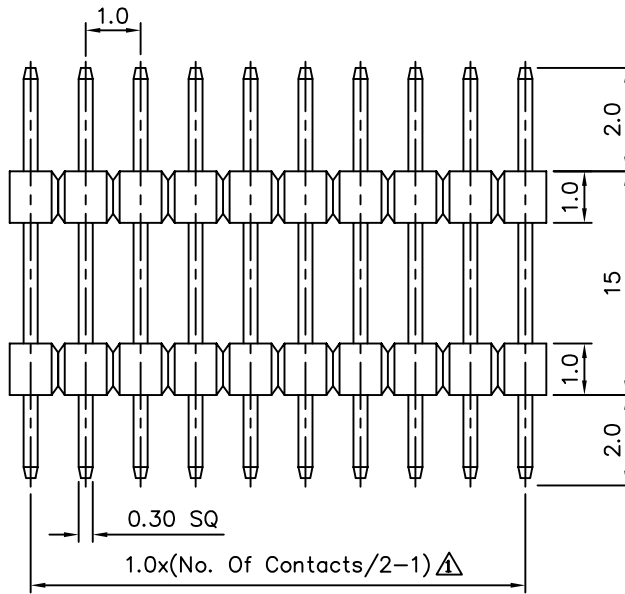

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 15788

APPROVED BY
 MEI
 CHECKED BY
 BECKY
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Dim.	BECKY	05/10/2006
△ A0		NEW RELEASE	BECKY	06/21/2005