



SPECIFICATION



Current Rating:1.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

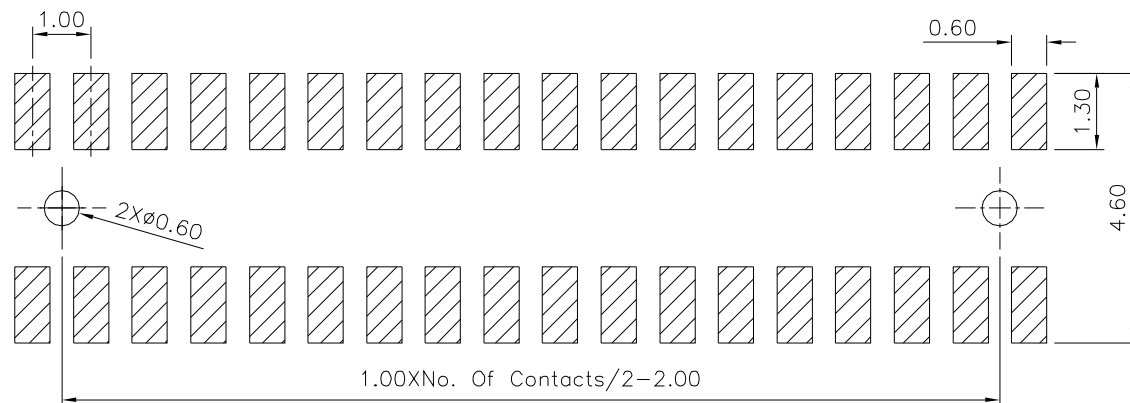

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

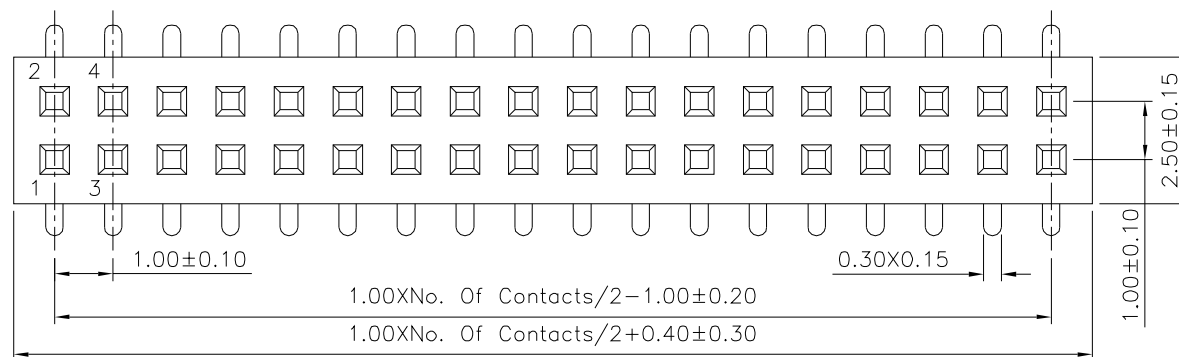

1.00XNo. Of Contacts/2+0.40±0.30

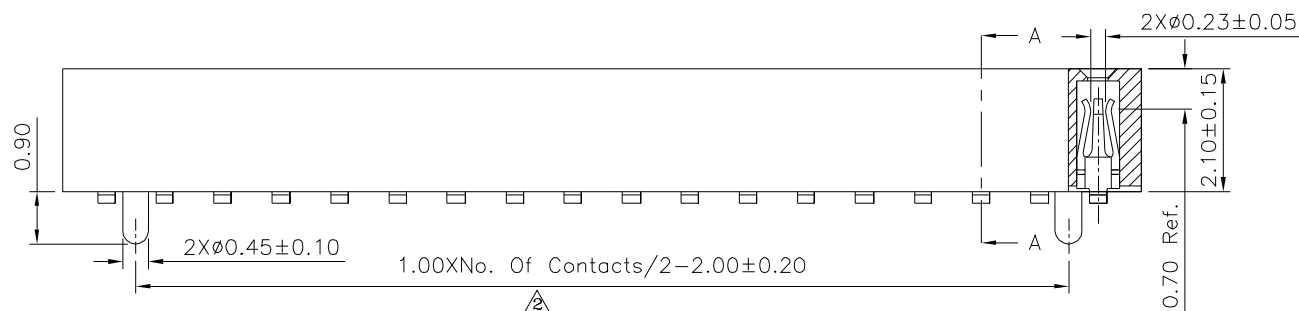

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

15807

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY SONG

SCALE


NONE

REV.

B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ B2	Modify Data	HZF	09/11/2024	
⚠ B1	Modify Data	HZF	11/22/2012	
⚠ B0	NEW RELEASE	HZF	09/26/2012	