

SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)

Voltage Rating:600V



Dielectric Withstanding Voltage:5000V AC/Minute

Ambient Temperature Rise:-55°C~+105°C

⚠ Insulator:PA66 (UL94V-2),Nature

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant












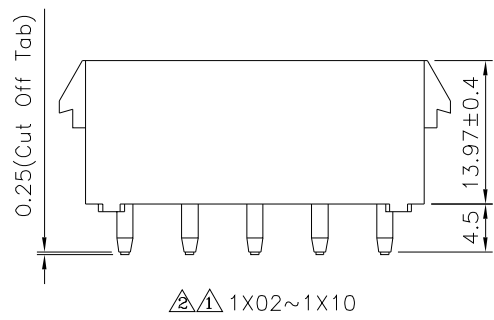
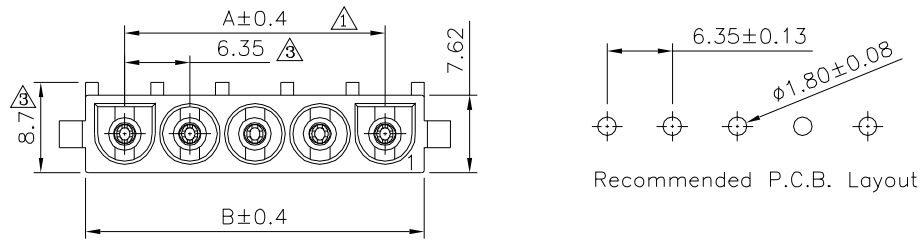


Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u>2</u> / <u>0</u> 15864		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08	<u>3</u> B3	Modify Data	HZF	05/30/2021	
		MEI			<u>2</u> B2	Modify Data	HZF	10/24/2016	
		CHECKED BY			<u>1</u> B1	Modify Data	HZF	05/16/2013	
		HZF			<u>0</u> B0	Modify Data	HZF	12/01/2009	
		DRAWING BY			<u>0</u> B0	NEW RELEASE	HZF	12/01/2009	
		CYP							
SCALE	NONE	REV.	B3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE

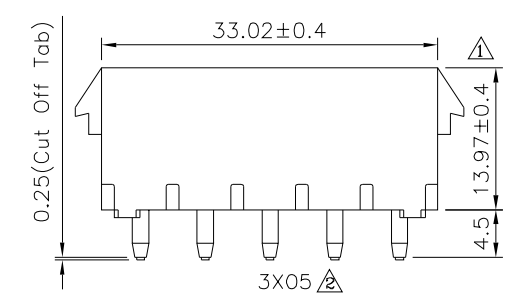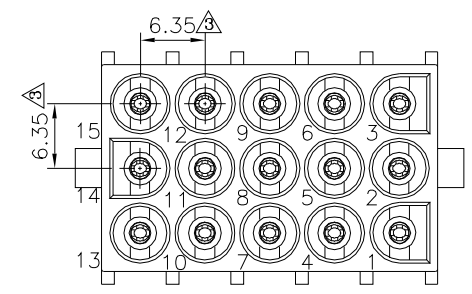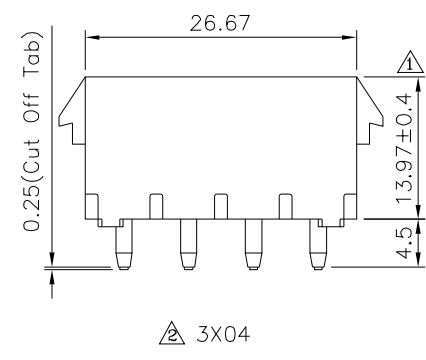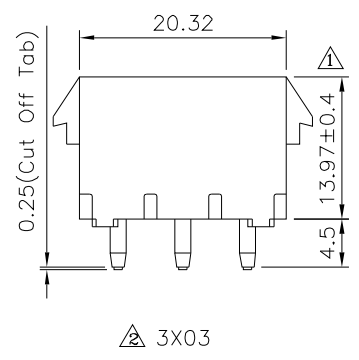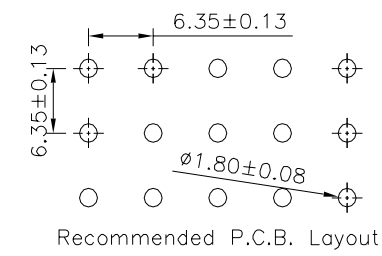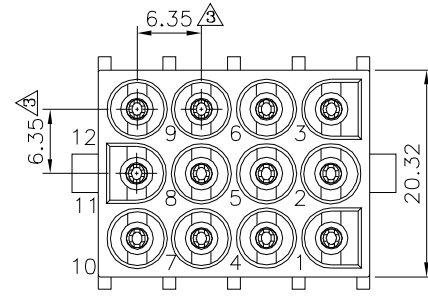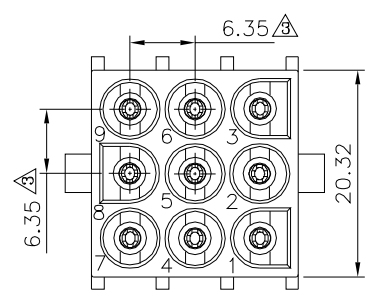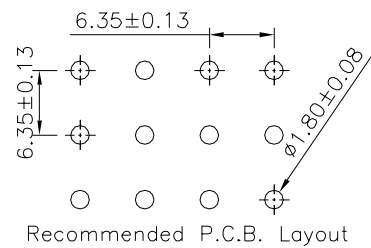

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u>15864</u>		APPROVED BY	
		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08		NO. REV.		REVISIONS		CHK	DATE
		B3		Modify Data		HZF	05/30/2021
		B2		Modify Data		HZF	10/24/2016
		B1		Modify Data		HZF	05/16/2013
		B0		Modify Data		HZF	12/01/2009
		B0		NEW RELEASE		HZF	12/01/2009

