
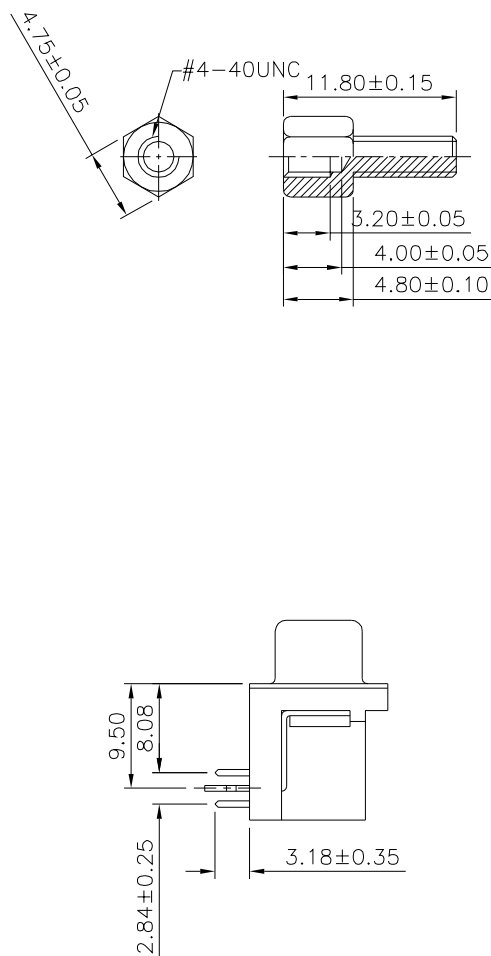
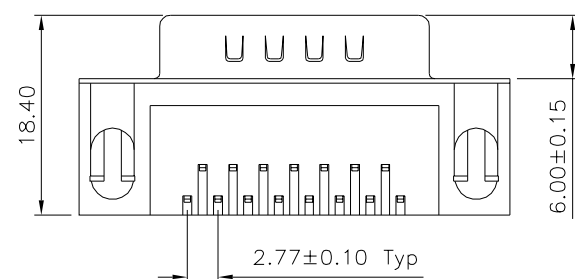
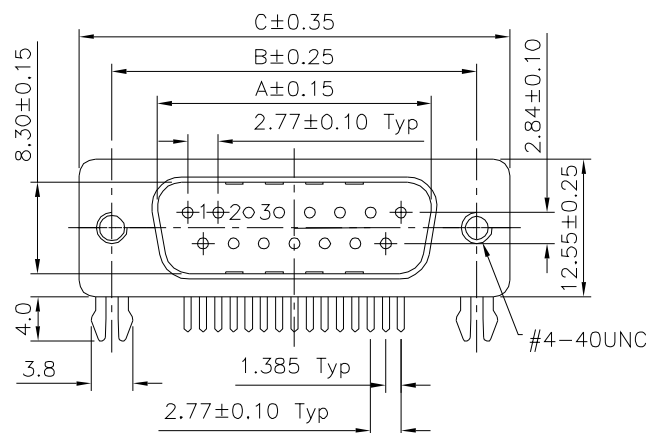


SPECIFICATION

Current Rating: 1 Amps
 Withstanding Voltage: 500V(One Minute)
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At 500V DC
 Operating Temperature: -40°C~+85°C
 Shell: SPCC, Nickel Plated
 Insulator: PBT+30%G.F.(UL94V-0)
 Contact: C2680, Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 Boardlock: SPCC, Tin Plated
 Rivet: C3604, Nickel Plated
 Screw: 12L14, Nickel Plated
 RoHS Compliant

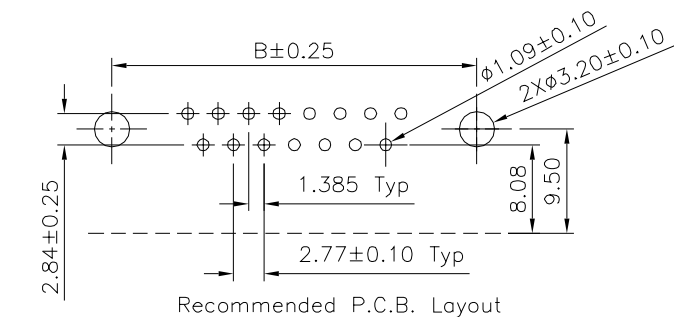

Pin	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15939

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ B0 NEW RELEASE HZF 08/06/2019