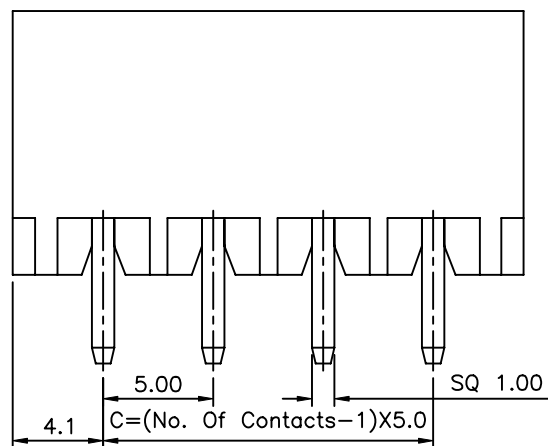
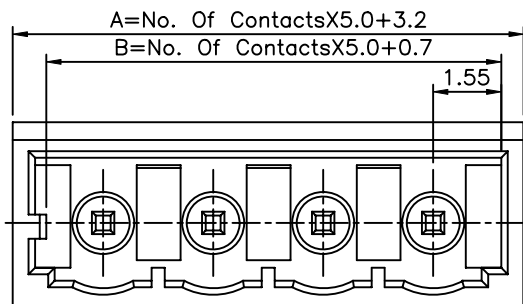



cULus

Voltage Rating:300V
 Current Rating:8A
 Withstanding Voltage:1.6KV
 Operation Temperature:-40°C~+105°C
 Soldering Temperature:250°C±10°C/5 Sec
 Terminal(Housing):Thermoplastic(UL94V-0),Gray
 Male Contact Pin:Copper,Tin Plated
 Safety Approval:CE,UL
 RoHS Compliant

	A	B	C
2~6P	± 0.20	$\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	± 0.20
6~12P	± 0.30	$\begin{smallmatrix} +0.20 \\ -0.00 \end{smallmatrix}$	± 0.30
12~24P	± 0.40	$\begin{smallmatrix} +0.30 \\ -0.00 \end{smallmatrix}$	± 0.40

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.10 ANG. ±1°							
		MEI									
		CHECKED BY	HZF								
		DRAWING BY	WZL								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE		HZF	02/10/2010
						NO.REV.	REVISIONS			CHK	DATE