

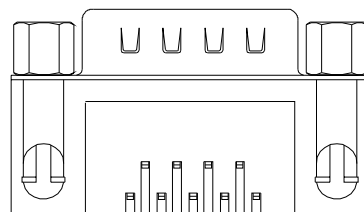



△ SPECIFICATION
 Current Rating:1 Amps
 Voltage Rating:250V AC
 Withstanding Voltage:500V(One Minute)
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operating Temperature: -55°C~+105°C
 Shell:Steel,Nickel Plated
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Rivet:Brass,Nickel Plated
 Z Flake:Steel,Tin Plated
 Screw:Steel,Nickel Plated
 RoHS Compliant

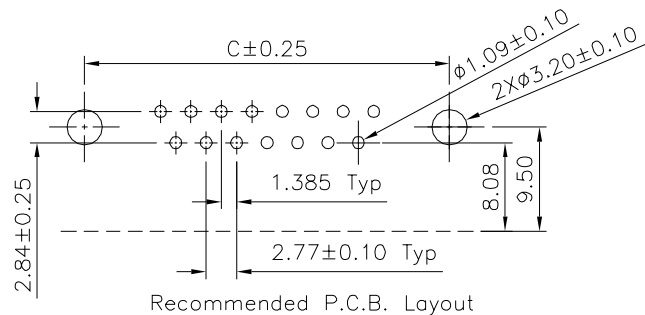


△ 9&37Pin

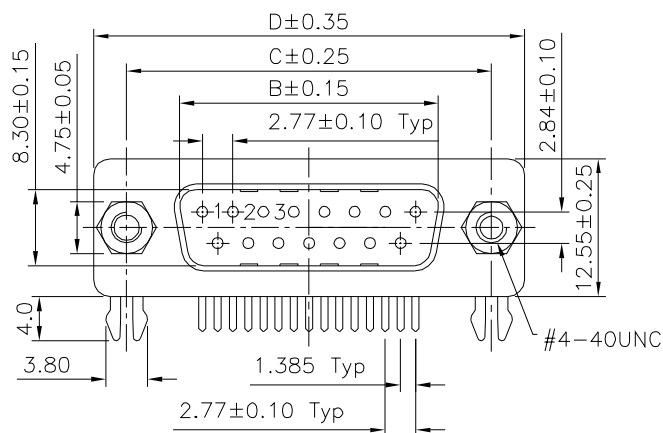


△

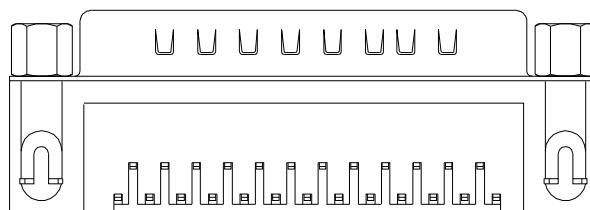

△ 25Pin

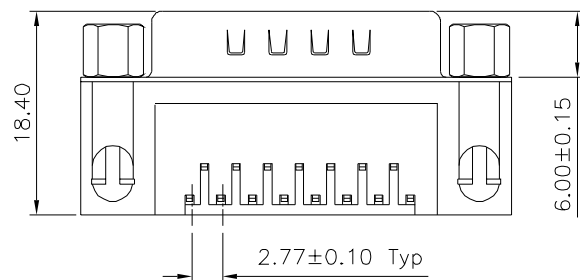

△ 15Pin

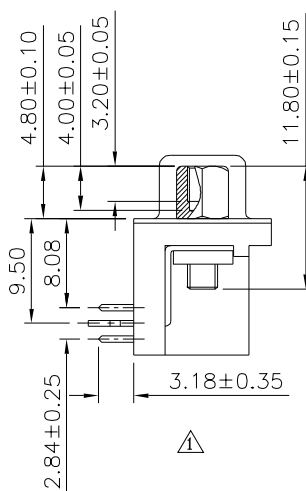

△

Pin	B	C	D
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15944

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



NO.

REV.

REVISIONS

CHK

DATE

△ B1

Modify Data

△ B0

NEW RELEASE

NO.

REVISIONS

CHK

DATE