


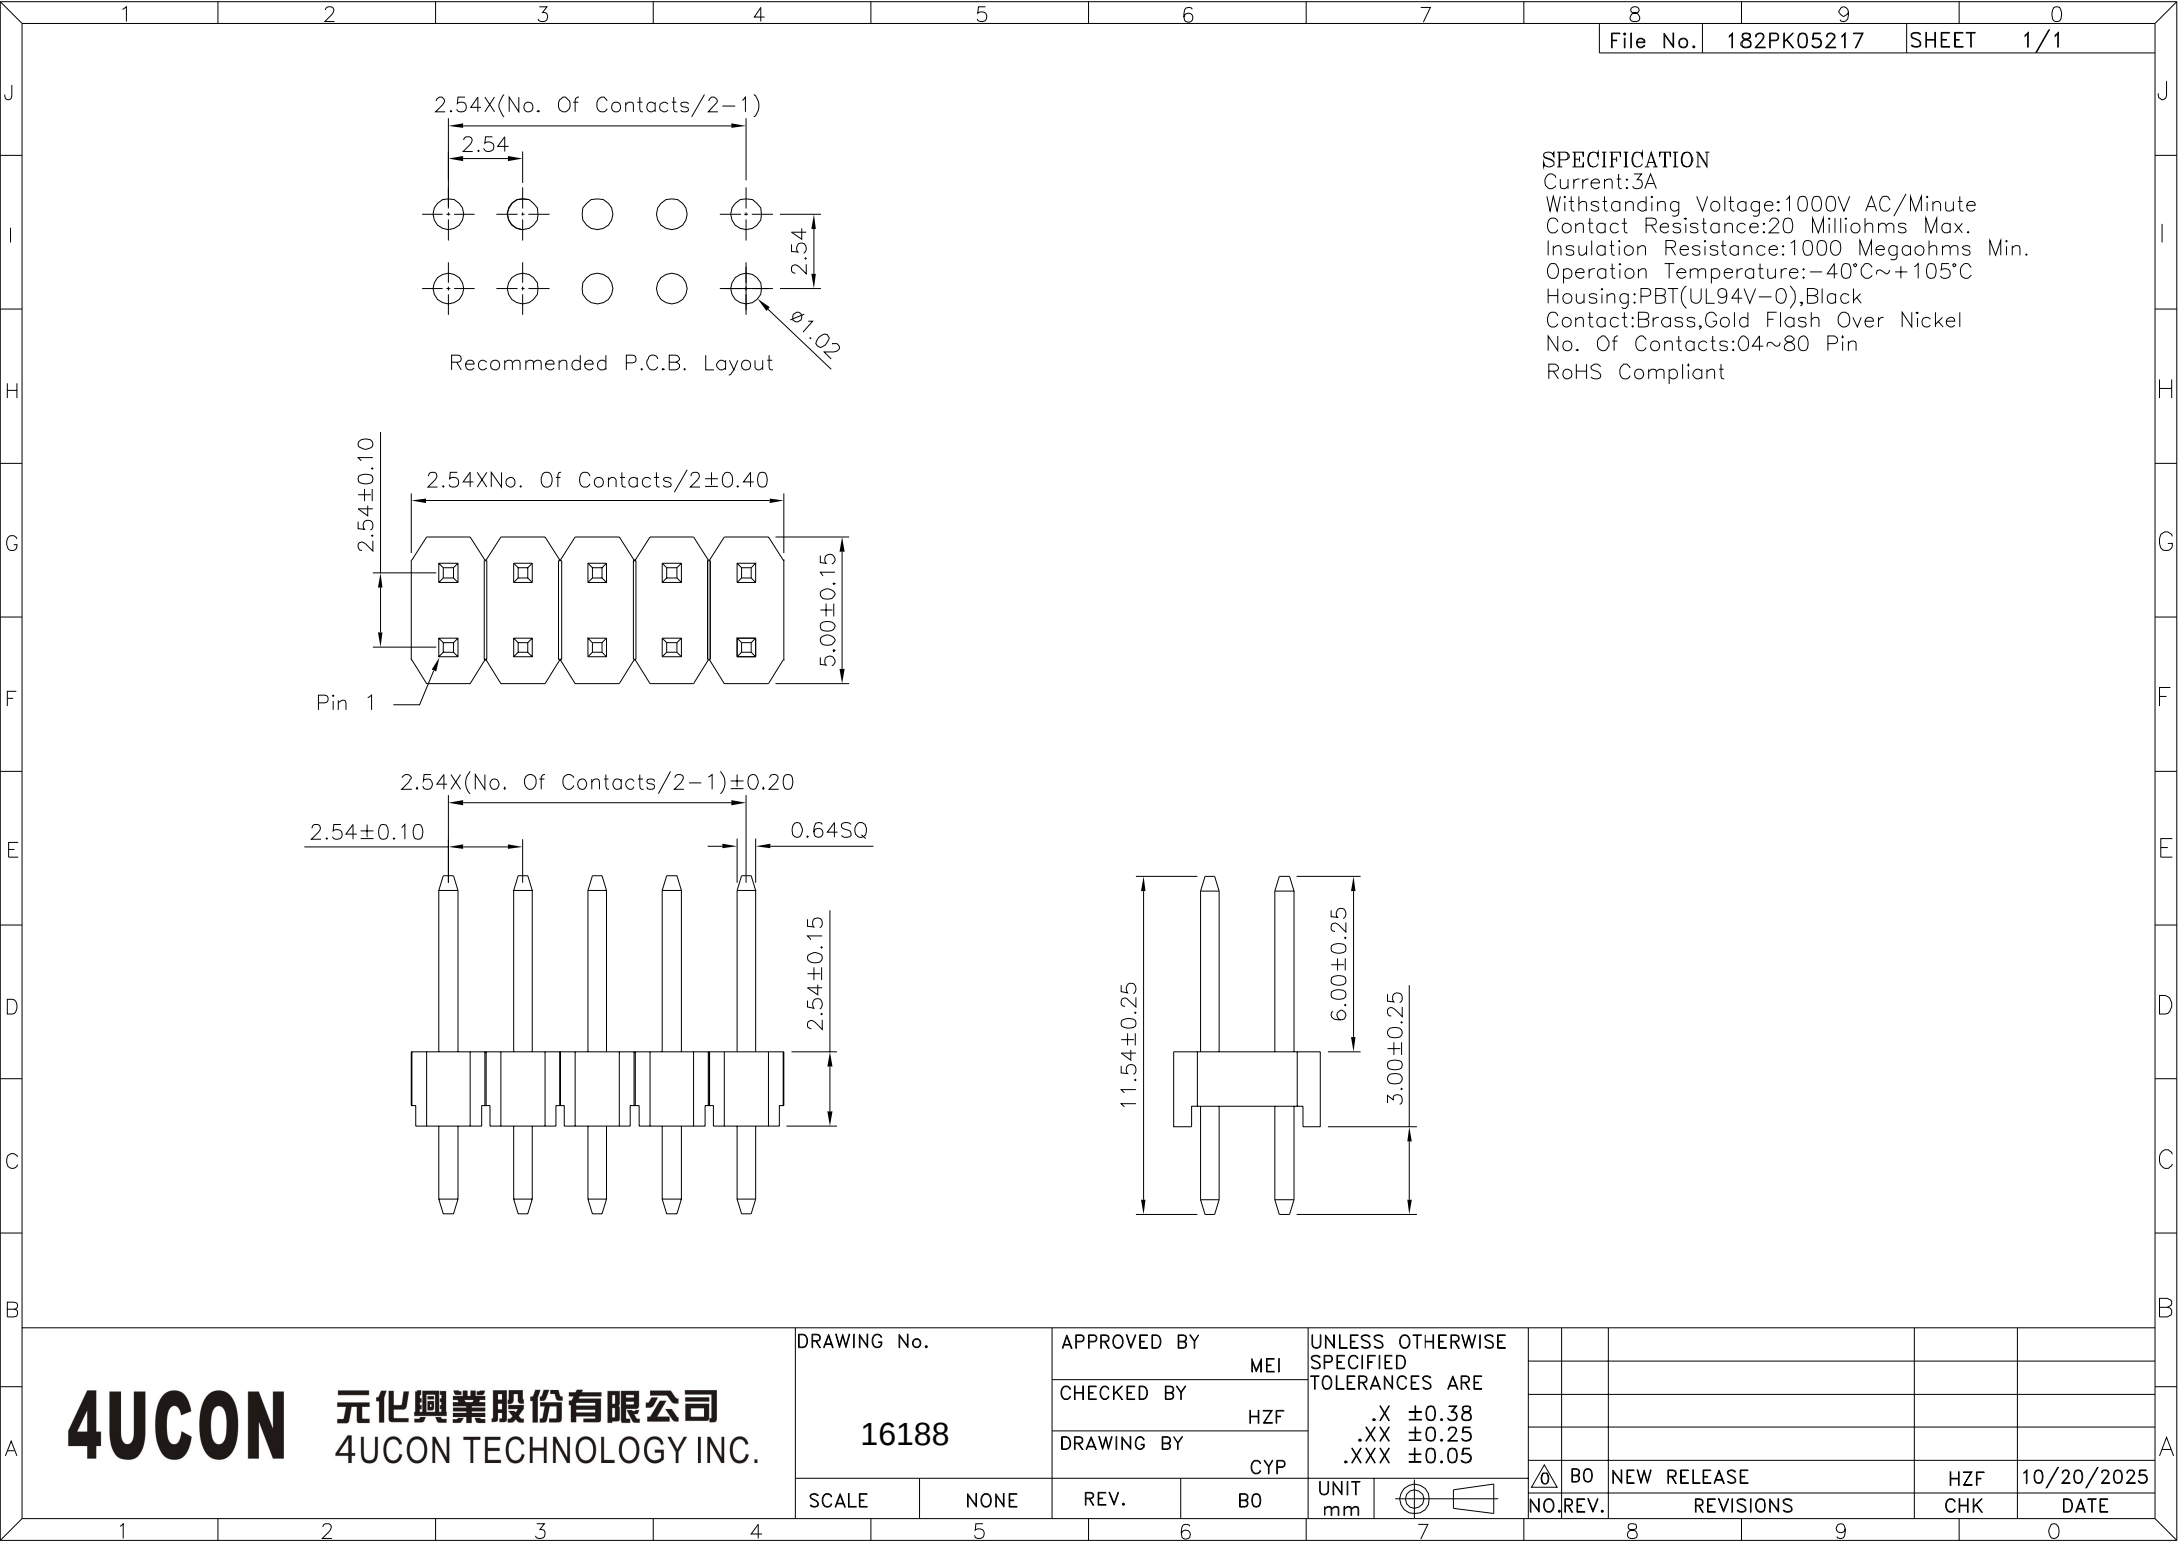

SPECIFICATION
Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~80 Pin
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16188		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY		CYP						
SCALE	NONE	REV.	BO	UNIT mm		 BO	NEW RELEASE		HZF	10/20/2025
						NO.	REV.	REVISIONS	CHK	DATE