
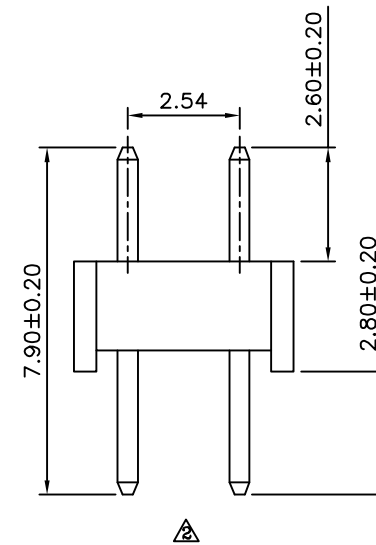
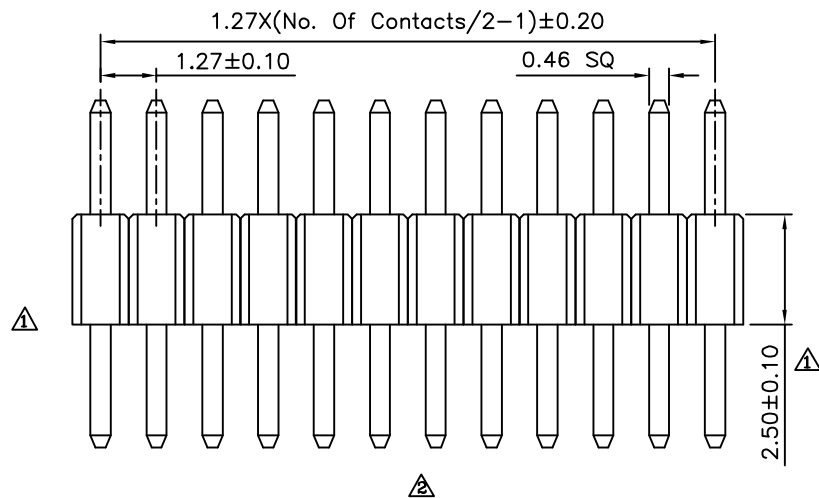


Recommended P.C.B. Layout

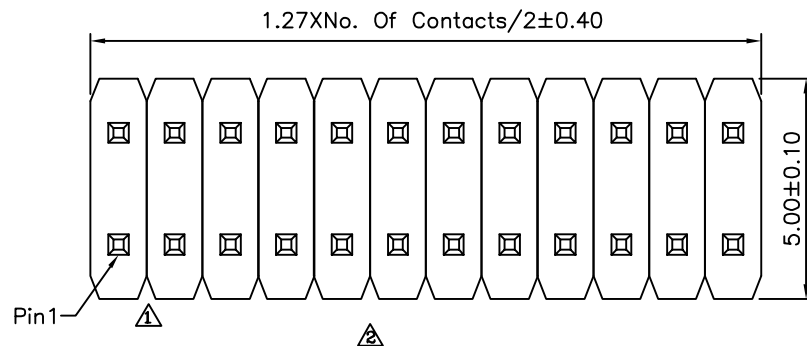

△ SPECIFICATION
△ Current Rating:1A
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash
No. Of Contacts:04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16227

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
 mm



⚠	A2	Modify Data	HZF	06/28/2011
⚠	A1	Modify Data	HZF	09/25/2008
⚠	A0	NEW RELEASE		
NO REV.	REVISIONS		CHK	DATE