
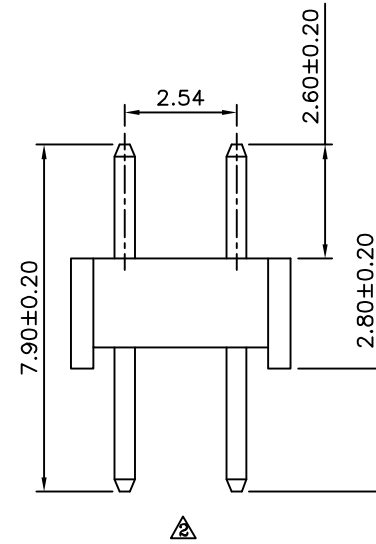
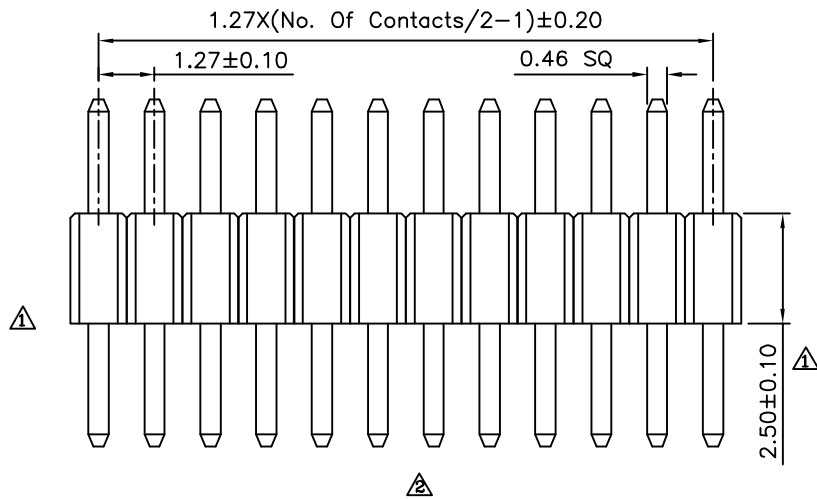


Recommended P.C.B. Layout

**△ SPECIFICATION**  
 △ Current Rating:1A  
 Withstand Voltage:1000V AC For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature Range:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Copper Alloys,Gold Flash  
 No. Of Contacts:04~100 Contacts  
 RoHS Compliant

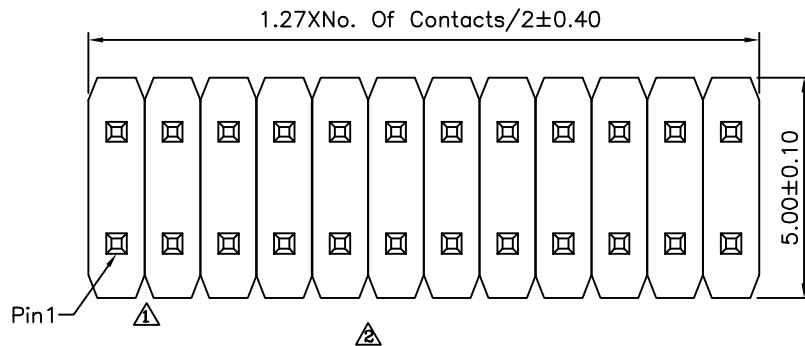

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 16241

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 WSS

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

SCALE NONE

REV. A2

UNIT mm

NO. REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	06/28/2011
△ A1	Modify Data	HZF	09/25/2008
△ A0	NEW RELEASE		