


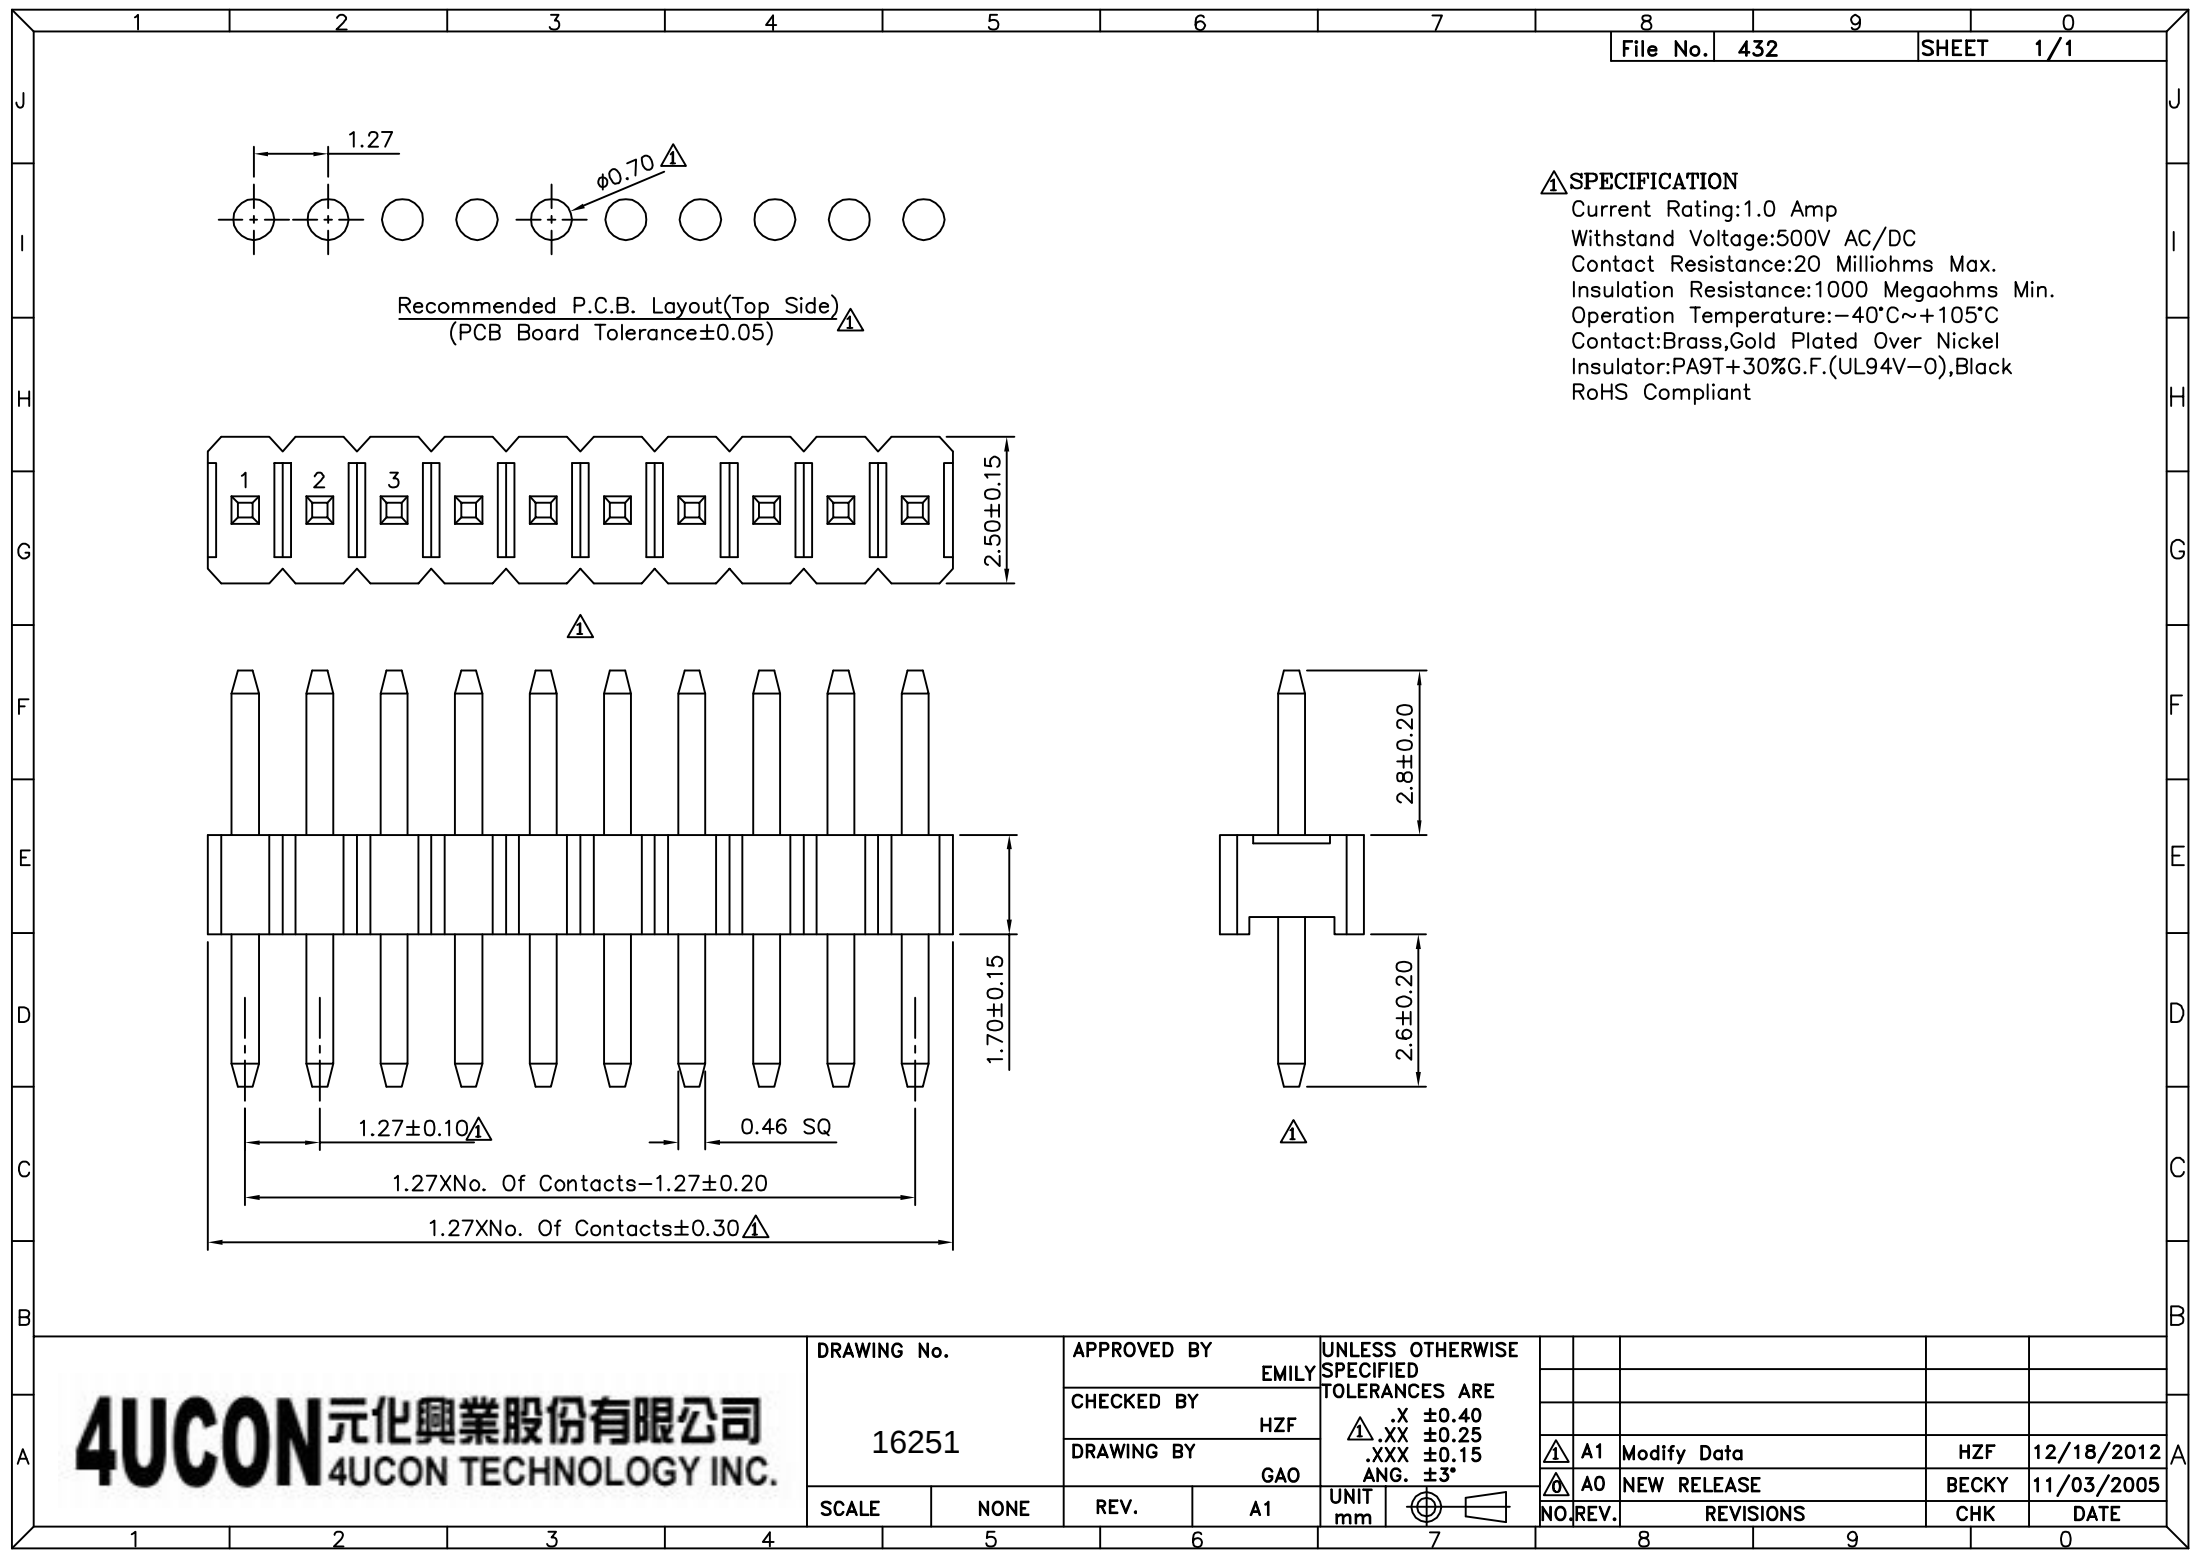

△ SPECIFICATION
Current Rating: 1.0 Amp
Withstand Voltage: 500V AC/DC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact: Brass, Gold Plated Over Nickel
Insulator: PA9T+30%G.F.(UL94V-0), Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16251		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △.X ±0.40 △.XX ±0.25 △.XXX ±0.15 ANG. ±3°																			
		EMILY																					
		CHECKED BY																					
		HZF																					
DRAWING BY		GAO				△ A1	Modify Data		HZF	12/18/2012	A												
						△ A0	NEW RELEASE		BECKY	11/03/2005													
SCALE		NONE		REV.		A1		UNIT		mm		NO.		REV.		REVISIONS		CHK		DATE			
		5				6				7				8				9				0	