


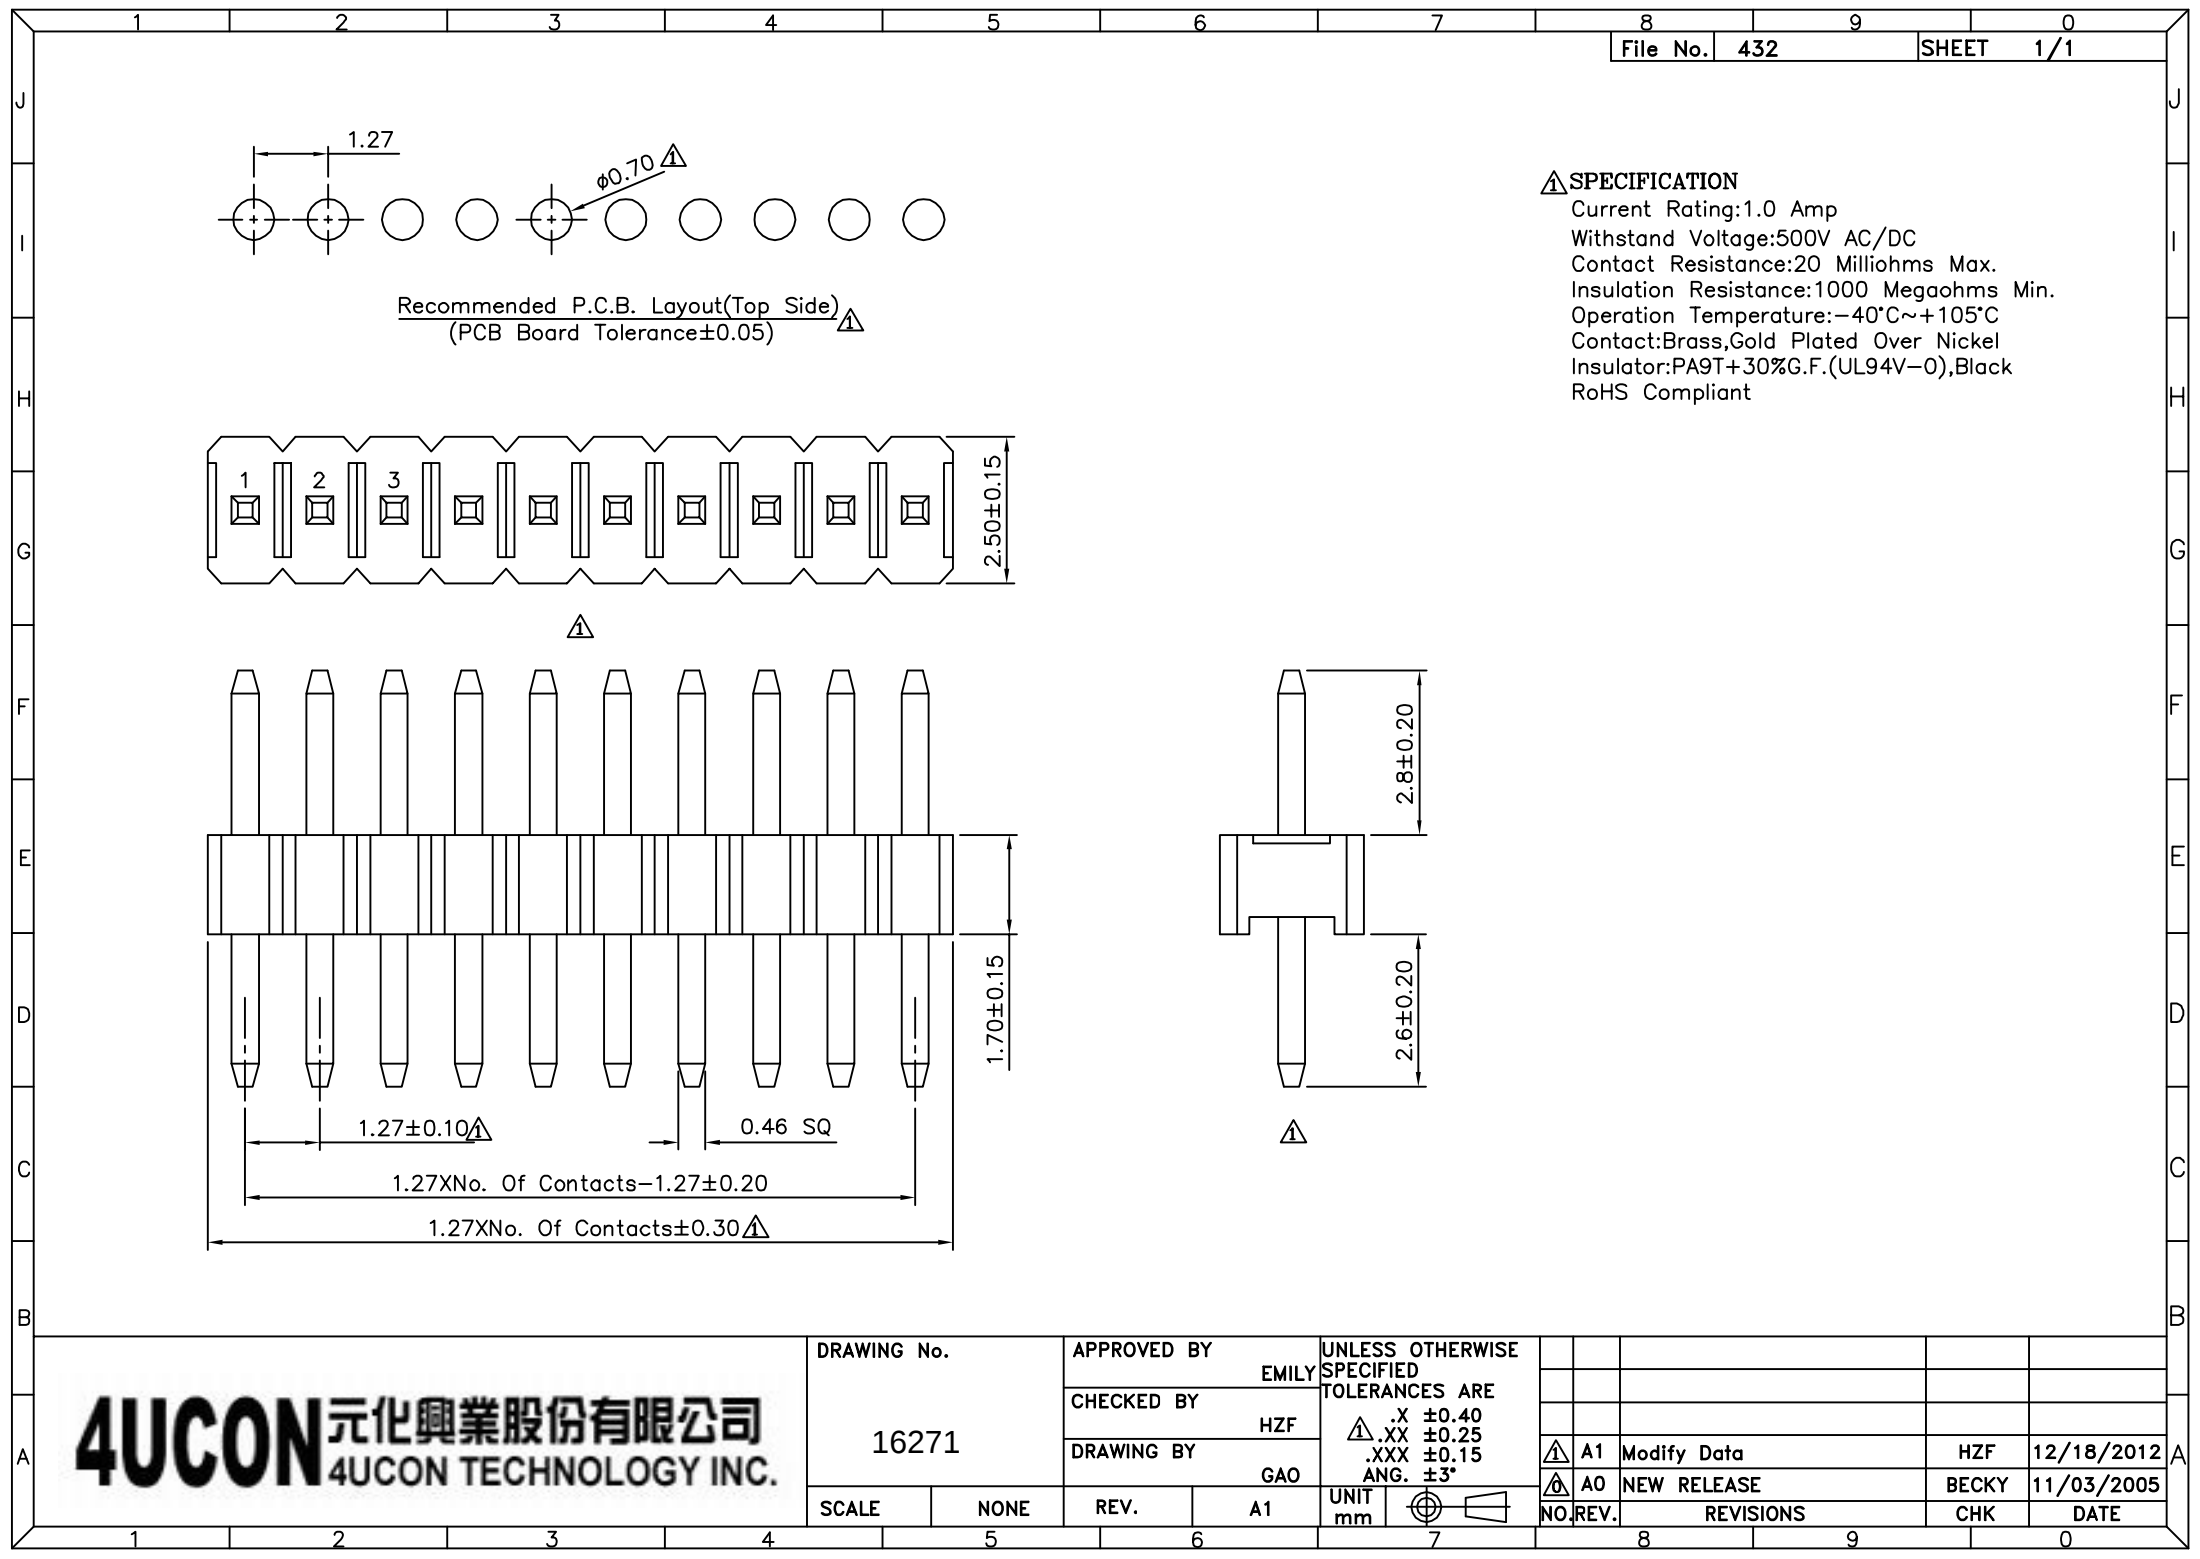


△ SPECIFICATION
Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16271		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY GAO	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
△.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/18/2012
△ A0		NEW RELEASE	BECKY	11/03/2005