

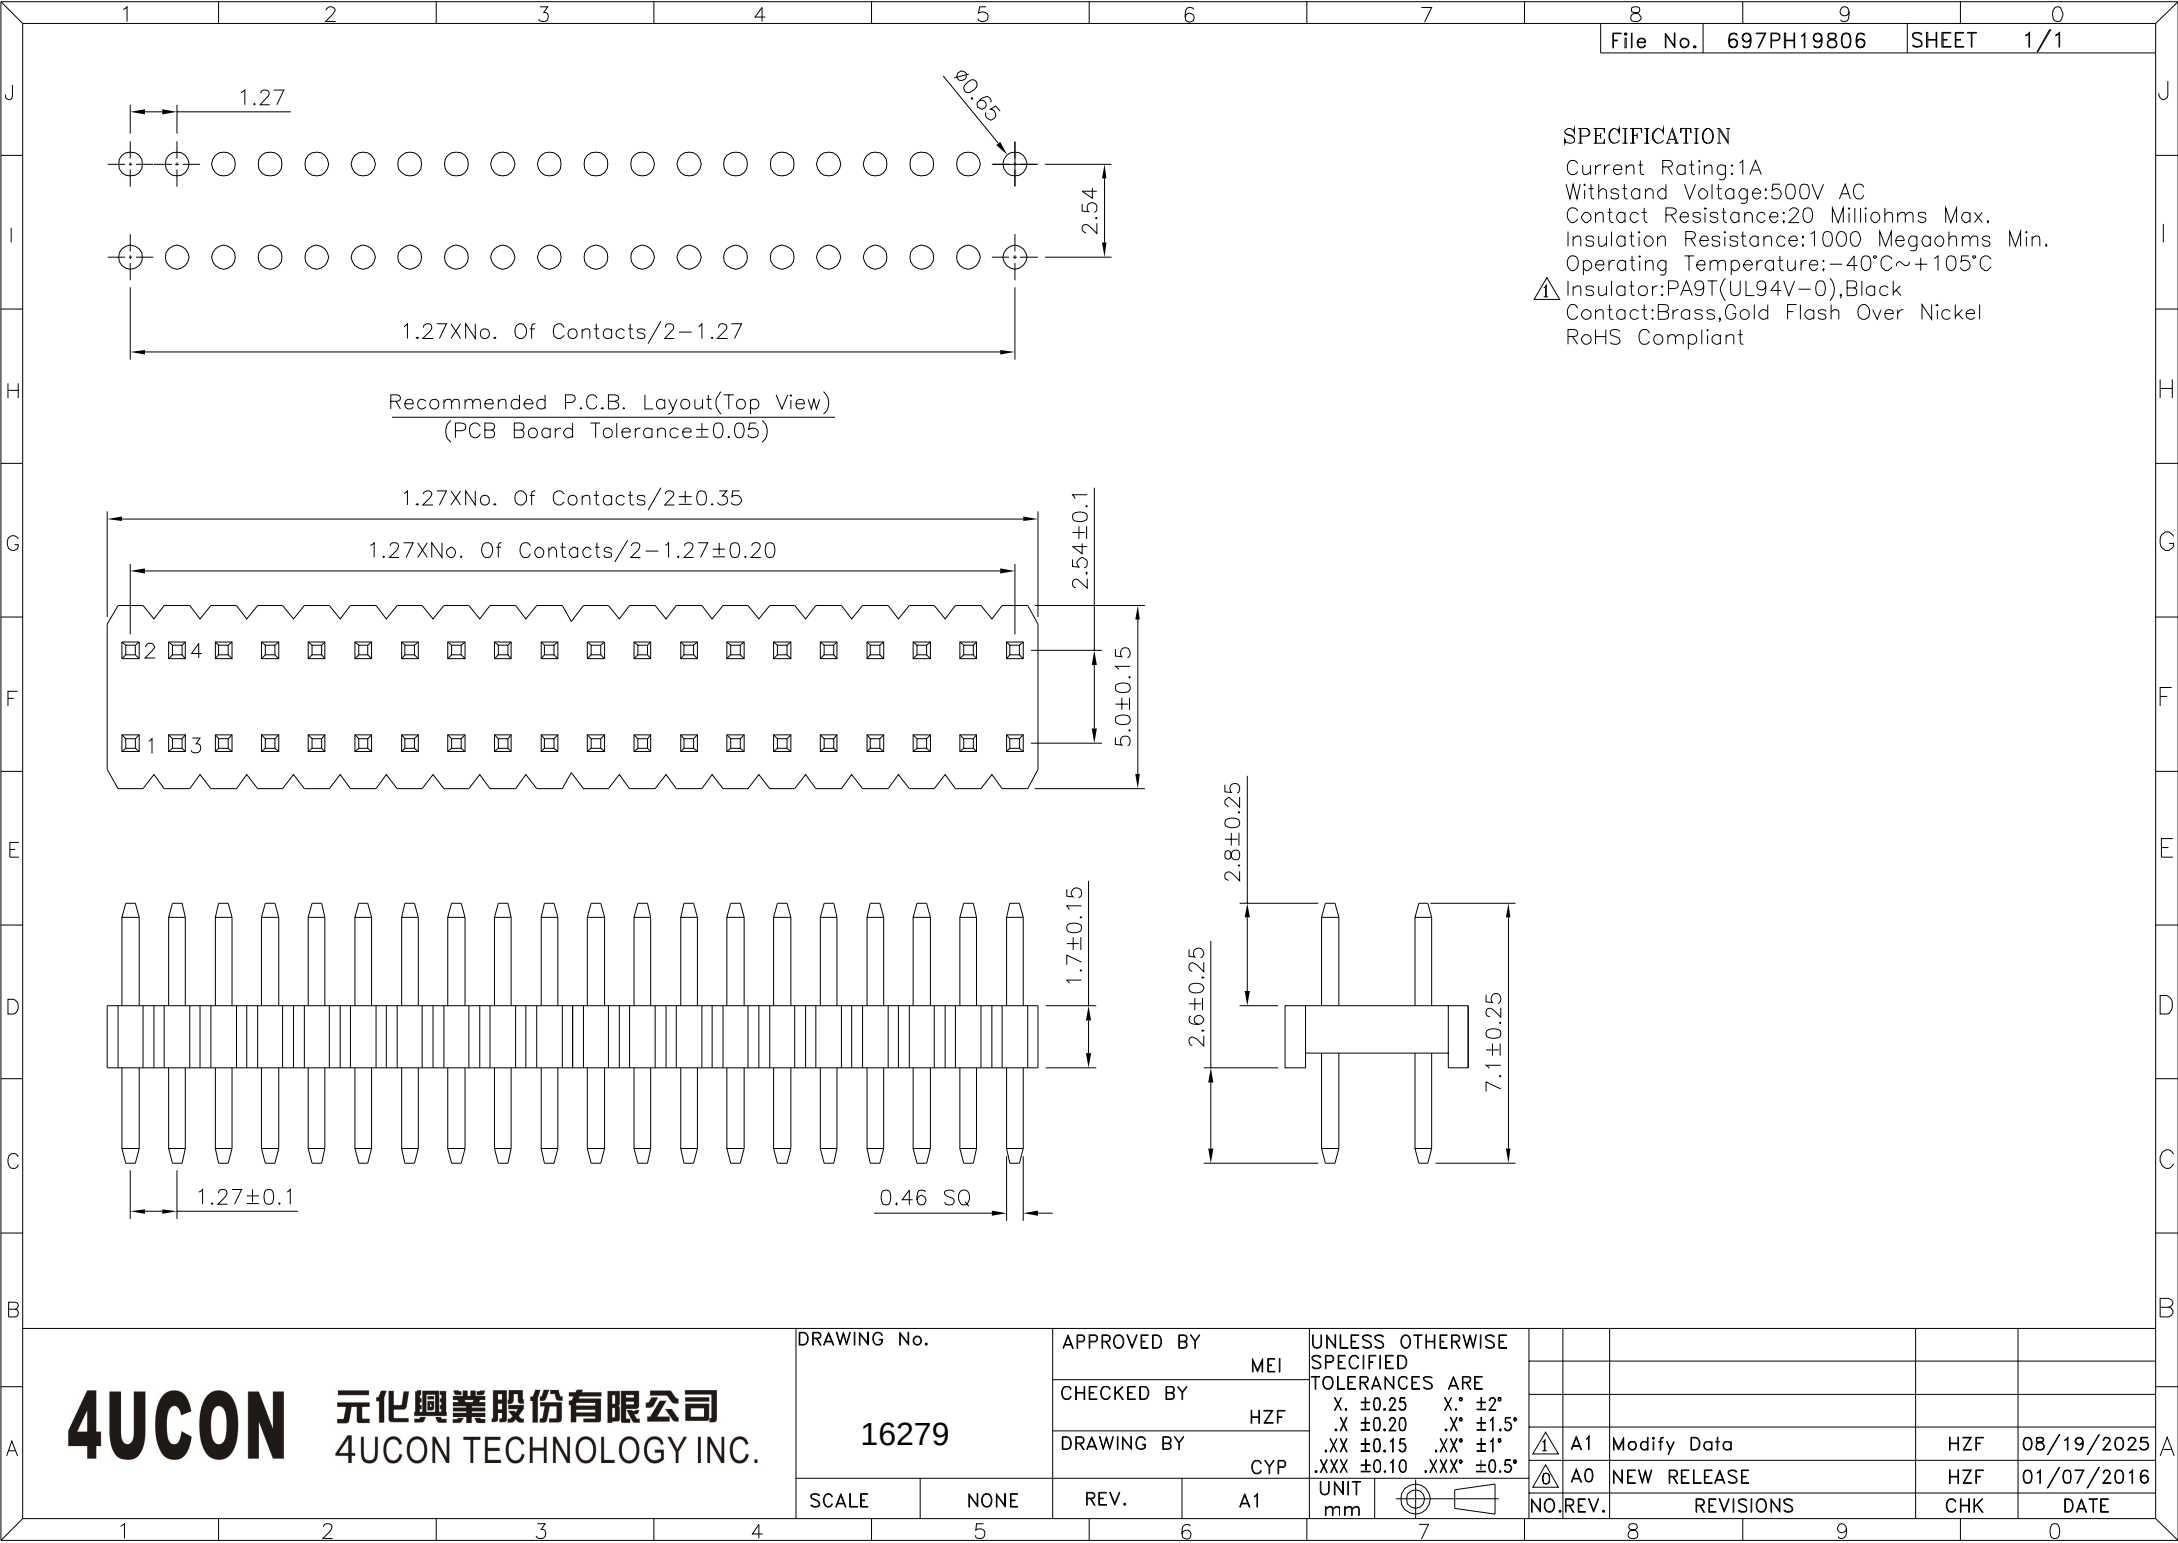
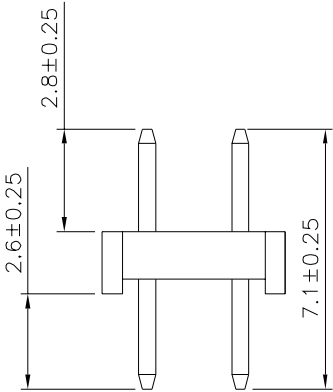


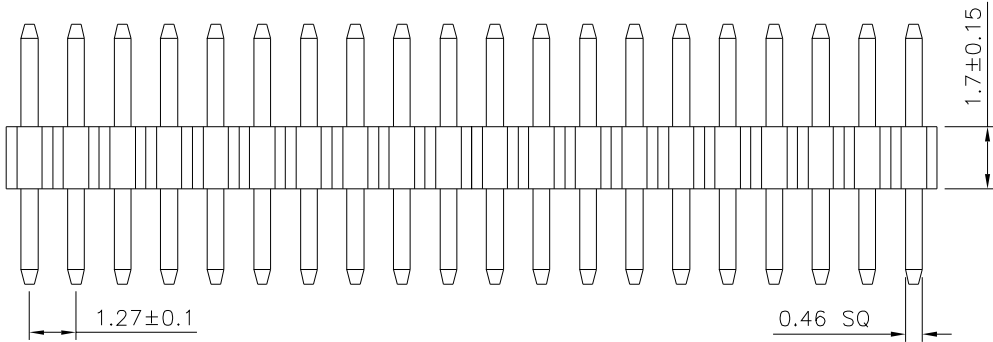


SPECIFICATION
Current Rating:1A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

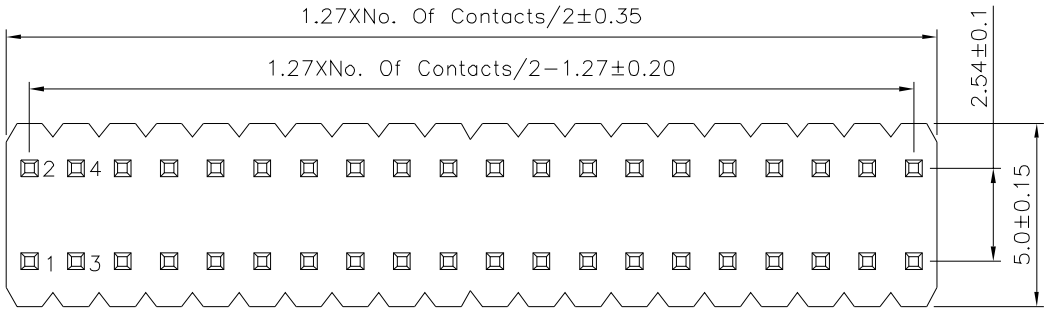

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .X* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*						
		MEI								
		CHECKED BY								
		HZF								
16279		DRAWING BY		CYP		⚠ A1	Modify Data	HZF	08/19/2025	A
		CYP				⚠ A0	NEW RELEASE	HZF	01/07/2016	
SCALE	NONE	REV.	A1	UNIT mm		NO.REV.	REVISIONS	CHK	DATE	