

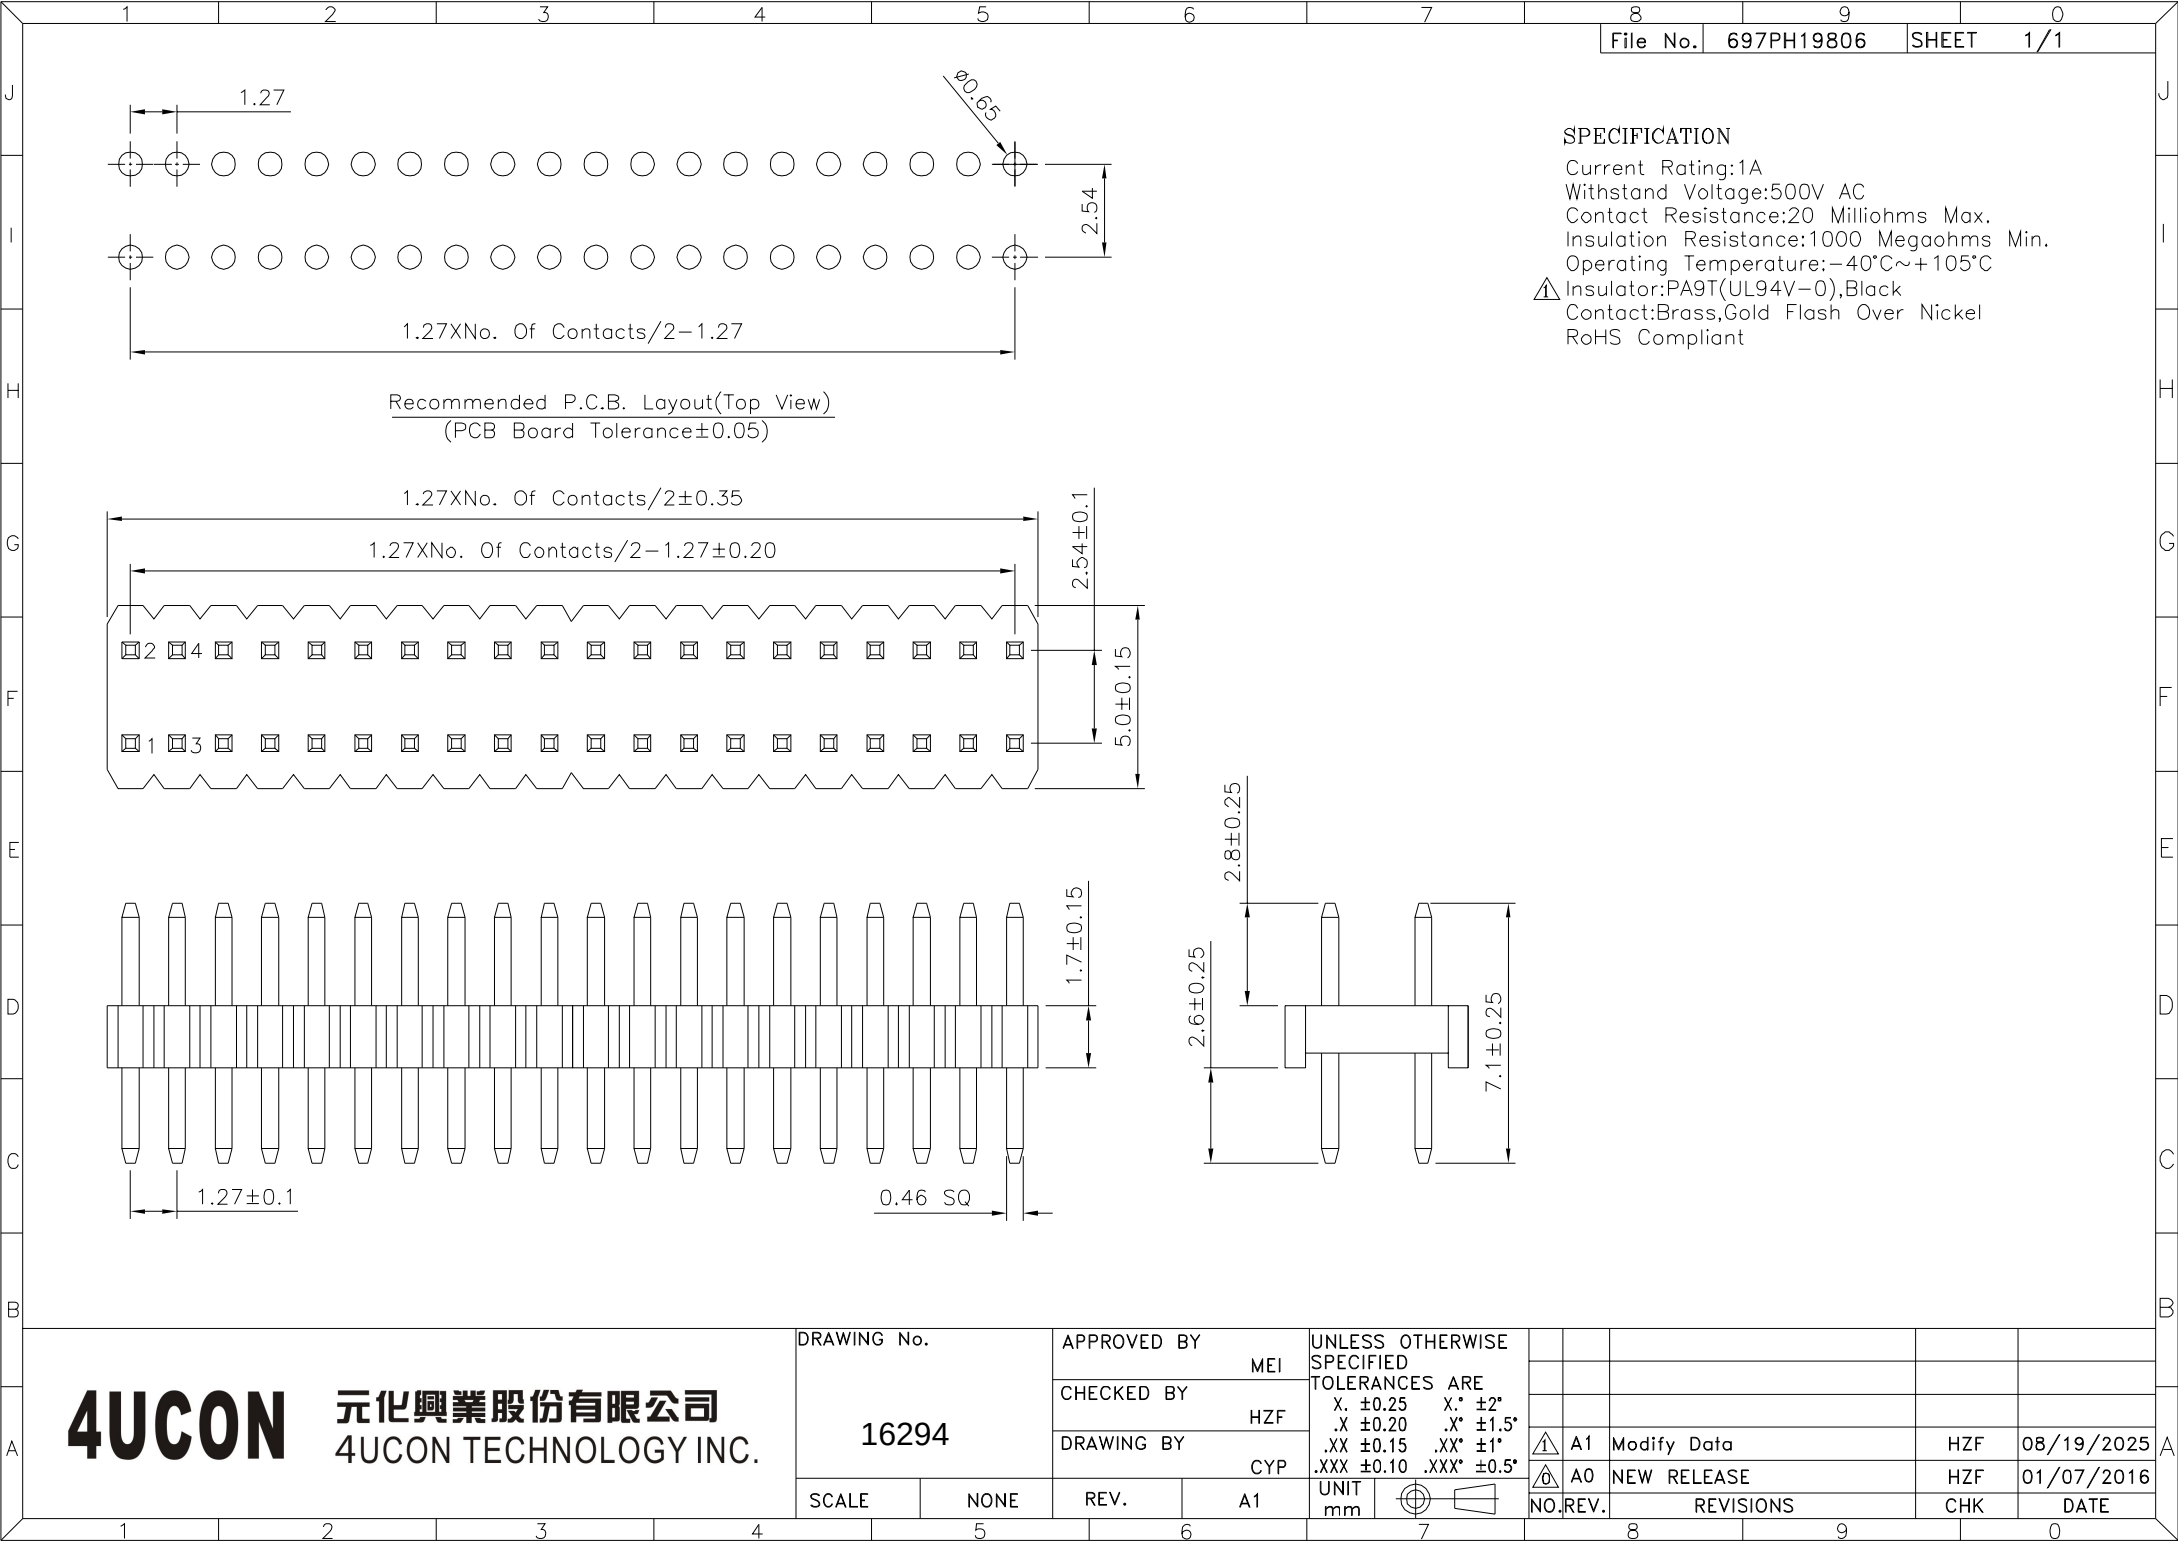
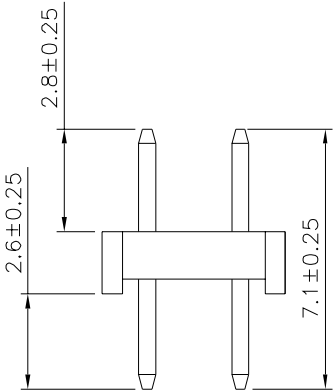


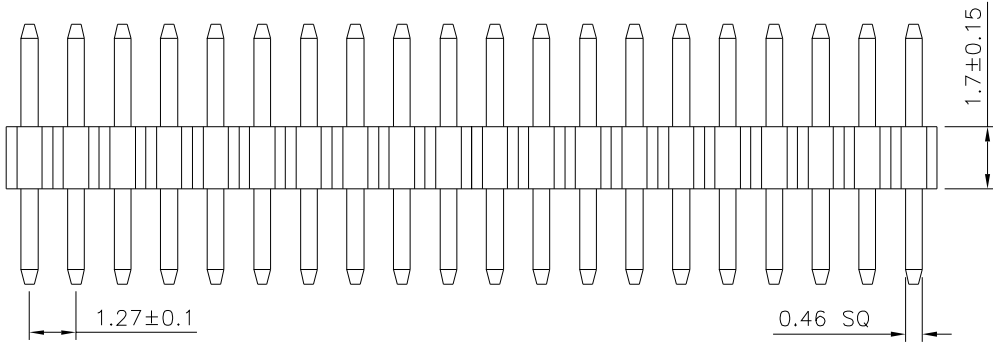

SPECIFICATION

Current Rating:1A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

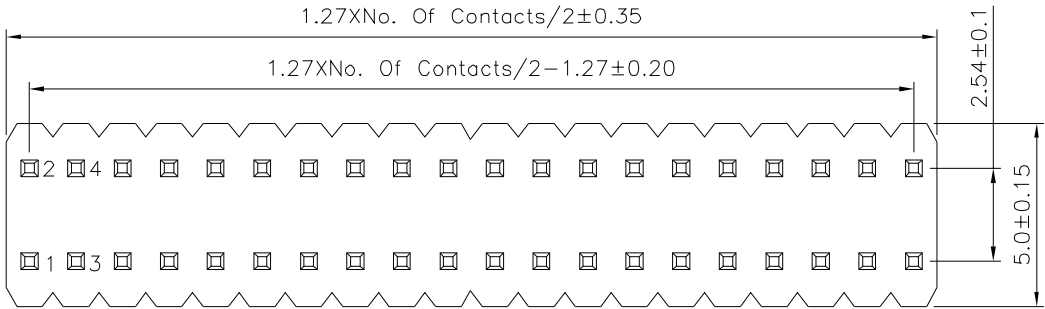

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16294

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



⚠	A1	Modify Data	HZF	08/19/2025	A
⚠	A0	NEW RELEASE	HZF	01/07/2016	
NO.	REV.	REVISIONS	CHK	DATE	