

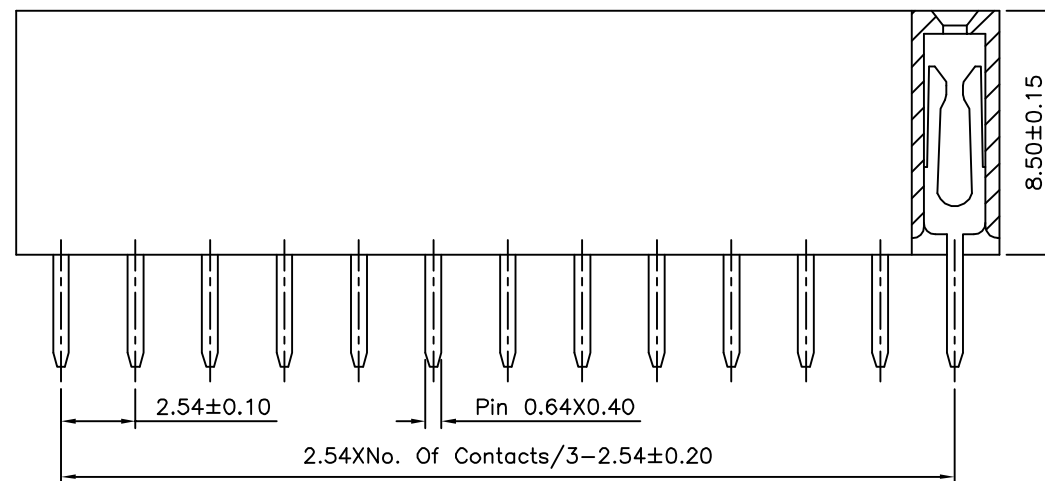


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

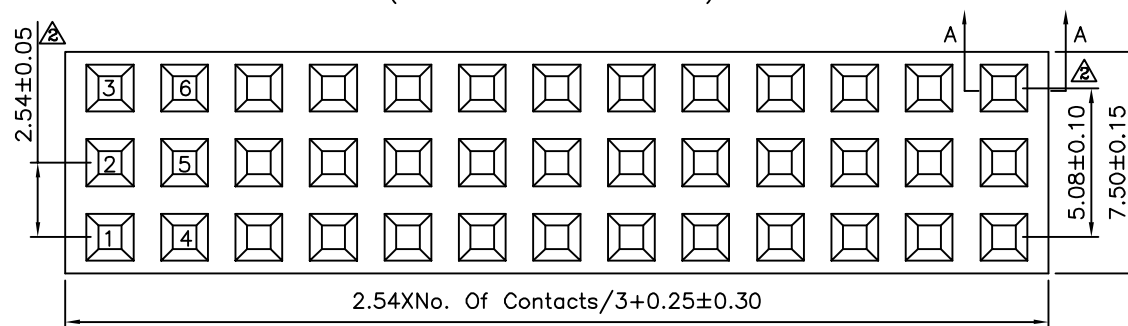

Section A-A

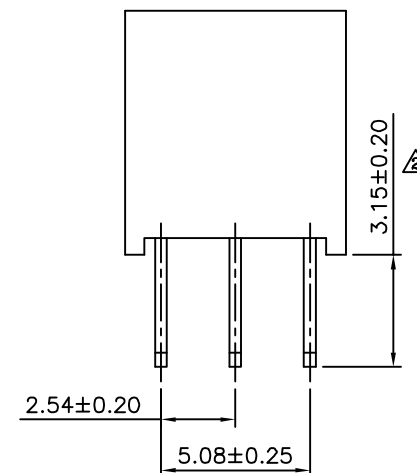

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

DRAWING No.

16634

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ± 0.40


.XX ± 0.25

.XXX ± 0.15

ANG. $\pm 3^{\circ}$

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
	A2	Modify Data	HZF	10/31/2011
	A1	Modify Data	BECKY	11/15/2005
	A0	NEW RELEASE	BECKY	05/03/2005

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

SCALE

NONE

REV.

A2