



Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

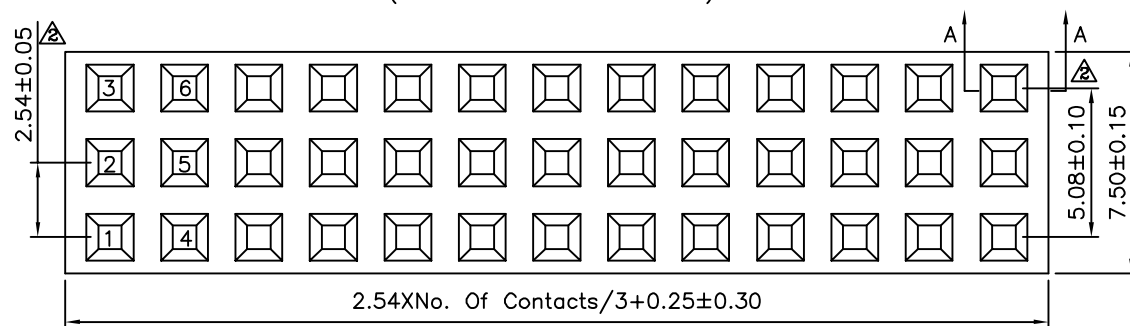


SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

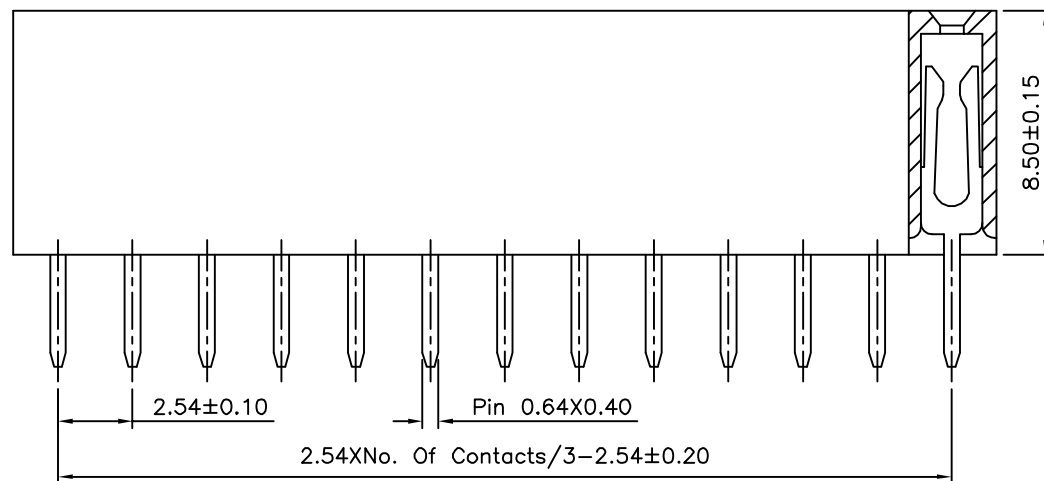

Section A-A

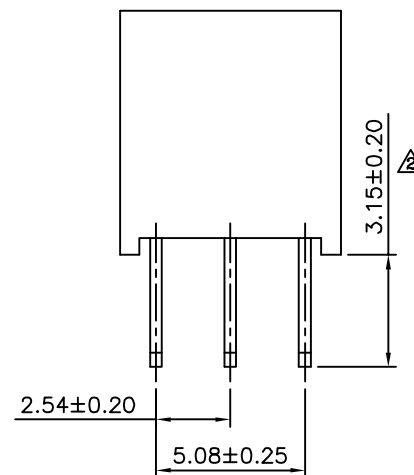

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16637

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

Δ .X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^{\circ}$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
Δ A2		Modify Data	HZF	10/31/2011
Δ A1		Modify Data	BECKY	11/15/2005
Δ A0		NEW RELEASE	BECKY	05/03/2005