

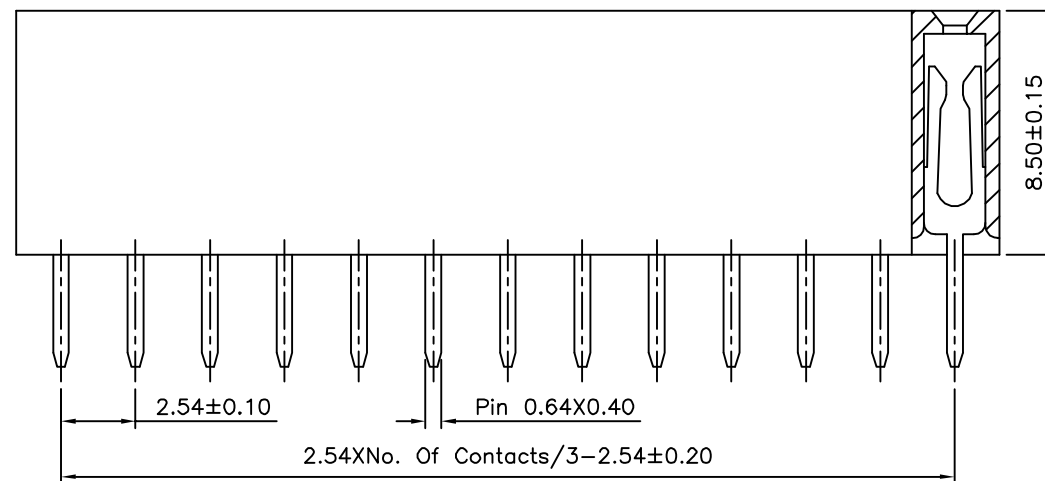


Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

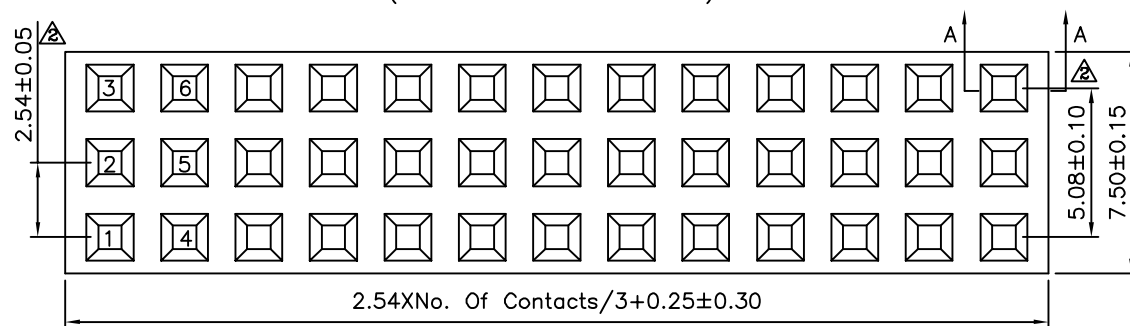

Section A-A

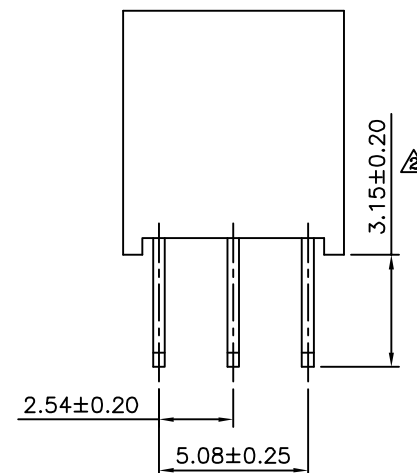

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

DRAWING No.

16639

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A2

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ± 0.40

.XX ± 0.25

.XXX ± 0.15

ANG. $\pm 3^\circ$

UNIT

mm

7

8

9

0

NO.

REV.

REVISIONS

CHK

DATE

A2

A1

A0

NO.

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

HZF

BECKY

BECKY

DATE

10/31/2011

11/15/2005

05/03/2005

DATE

DATE

DATE

DATE

DATE

DATE

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.