File No.	182	SHEET	1/1

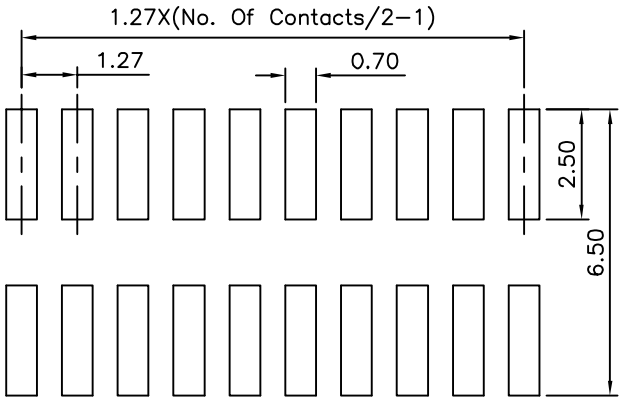

Recommended P.C.B. Layout

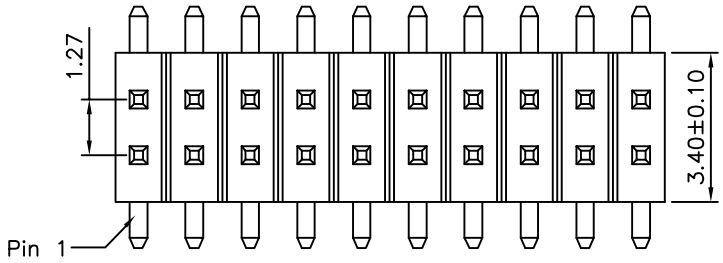

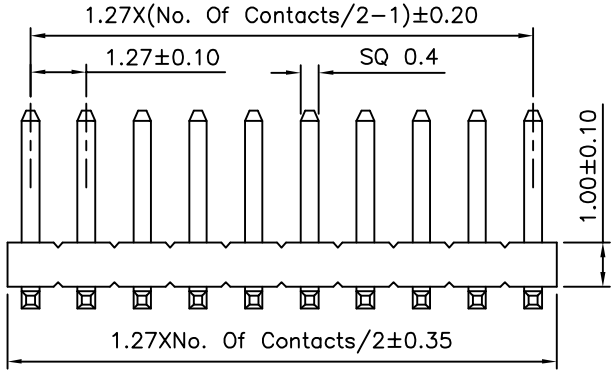



SPECIFICATION

Current Rating:1A
Dielectric Strength:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:−55°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
16792	MEI	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY GAO	ANG. ±5°
SCALE NONE	REV. C0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	C0	NEW RELEASE	HZF	04/17/2013