

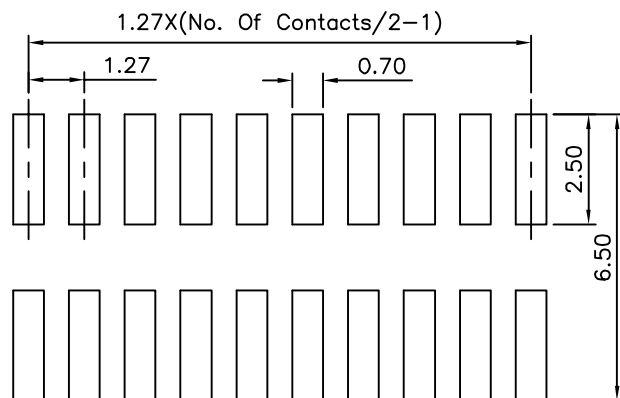



SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

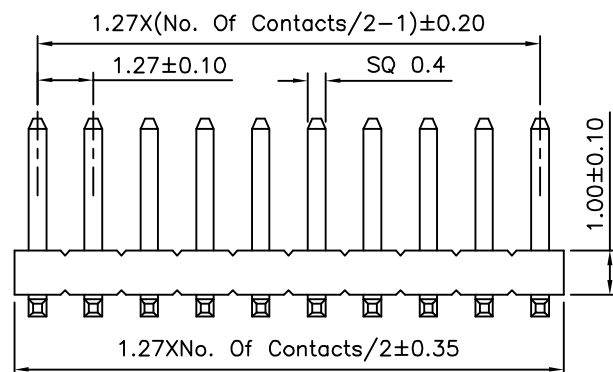

Recommended P.C.B. Layout

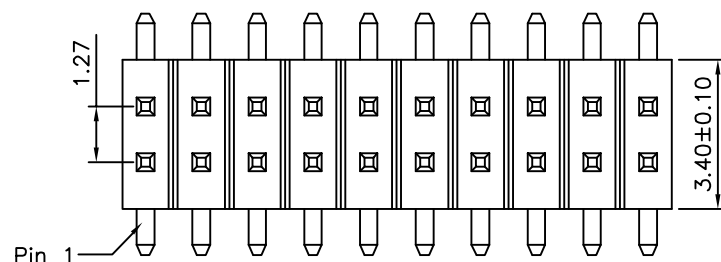

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16804

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°


SCALE

NONE

REV.

CO

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

CO

NEW RELEASE

REVISIONS

CHK

DATE

NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE