

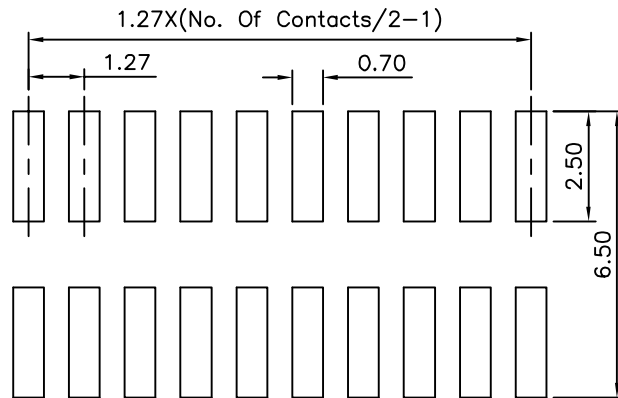



SPECIFICATION

Current Rating:1A
 Dielectric Strength:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

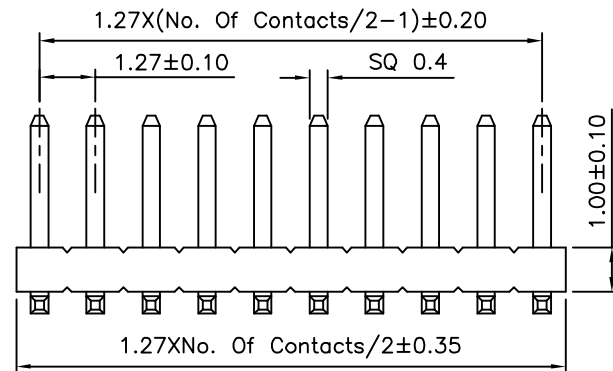

Recommended P.C.B. Layout

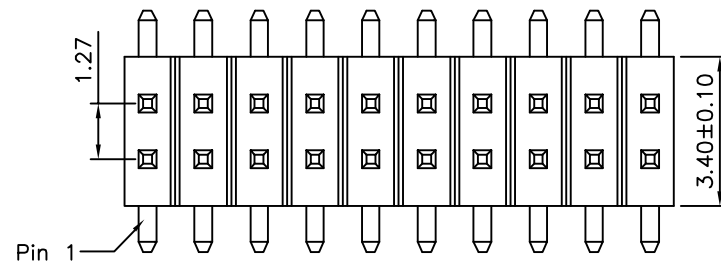

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16816

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


GAO

REV.

CO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO. REV.

CO NEW RELEASE

REVISIONS

CHK

DATE

CO

NEW RELEASE

REVISIONS

CHK

DATE

CO

NEW RELEASE

REVISIONS

CHK

DATE