




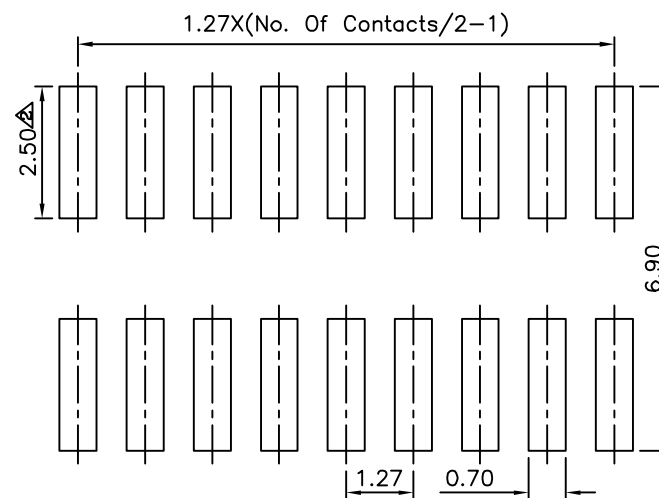


SPECIFICATION

Current:1A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Strength:1000V AC/Minute
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~100 Contacts
 RoHS Compliant

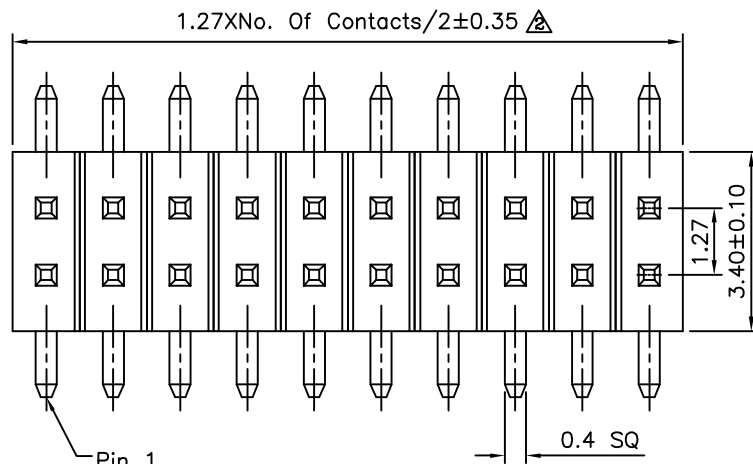

Recommended P.C.B. Layout

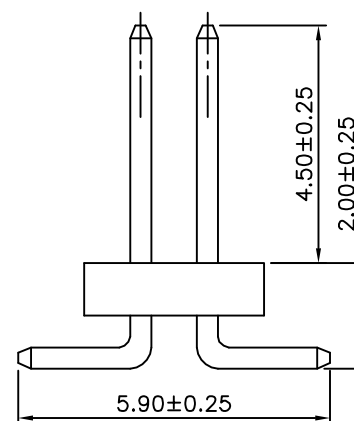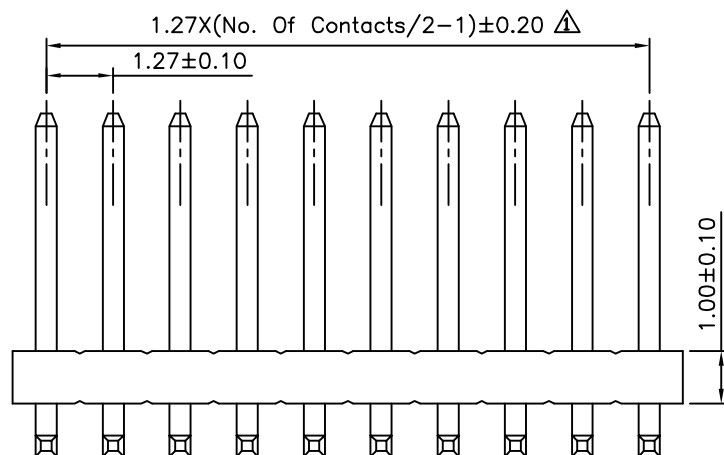

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16850

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
1	A3	Modify Data	HZF	11/26/2013
2	A2	Modify Data	HZF	05/17/2011
3	A1	Modify Data	HZF	11/13/2009
4	A0	NEW RELEASE	BECKY	02/04/2005